




Installation Instructions for 200 Watt 12 Volt DC LED Power Supply

SAVE THESE INSTRUCTIONS!

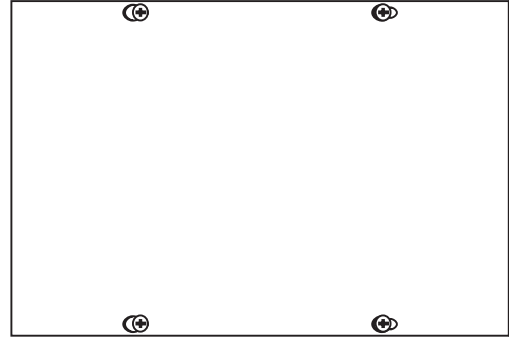

GENERAL INFORMATION

- **RISK OF FIRE:** This product must be installed by a qualified electrician. Turn the power to the electrical box off during installation. Read the "Important Safety Instructions" before installation.
- This product is not suitable for wet locations. It is approved for the use at any height above the finished floor.
- A typical installation is shown. Specific installation must be in accordance with the local electrical codes.
- **TO REDUCE RISK OF FIRE,** it is important to wire the power supply for the system as described in this installation instruction.
- Load the power supply to **MAXIMUM 200** Watts.
- Use CDP color dial or CTP color touch screen controller with RGB LED soft strip.

IMPORTANT SAFETY INSTRUCTIONS

- Do not install this power supply in a wet location.
 - To reduce the risk of the system overheating and possibly causing a fire, make sure all the connections are tight.
 - Do not install *LED fixture closer than three inches or as specified in the *LED fixture installation instructions to curtains or similarly combustible materials. Keep insulation at least 3" away from the enclosure.
 - Turn the electrical power off before modifying the lighting system in any way.
 - The system is "ETL" listed for USA and Canada only when all the products used are supplied by Edge Lighting.
- * See LED fixture installation instructions for proper placement.

WARNING: This power supply is equipped with a cooling fan. Do not run the power supply in a dusty environment. All drywall finish and sanding must be done prior to using the power supply. Dust particles may stop the fan from working & eventually destroy the power supply.


100W, 12VAC LOW VOLTAGE WIRE SIZE CHART

3% VOLTAGE DROP	WIRE LENGTH IN FT	UP TO 8FT	9FT-12FT	13FT-20FT	21FT-31FT	32FT-49FT
	WIRE SIZE	14 AWG	12 AWG	10 AWG	8 AWG	6 AWG
	VOLTAGE AT END OF THE WIRE	11.64 VAC	11.65 VAC	11.65 VAC	11.64 VAC	11.64 VAC

60W, 12VAC LOW VOLTAGE WIRE SIZE CHART



3% VOLTAGE DROP	WIRE LENGTH IN FT	UP TO 13FT	14FT-20FT	21FT-34FT	35FT-52FT
	WIRE SIZE	14 AWG	12 AWG	10 AWG	8 AWG
	VOLTAGE AT END OF THE WIRE	11.65 VAC	11.65 VAC	11.64 VAC	11.64 VAC

Using LED Power Supply with a Light Switch & Warm White Soft Strip (Non-Dimmable)

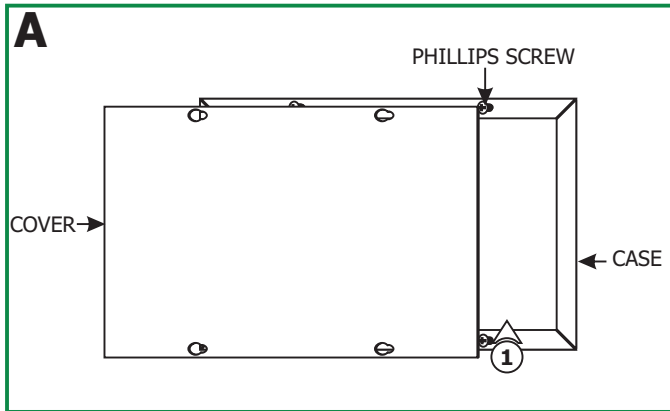


1: Loosen the four Phillips screws on the front of the power supply cover to slide the cover off of the case.

- 2:** Install conduits from the light switch, main panel (line voltage) and soft strip to the power supply case.
- 3:** Run proper size wires from the light switch electrical box to the power supply case.
- 4:** Run the line voltage power wires from the panel to the power supply case.

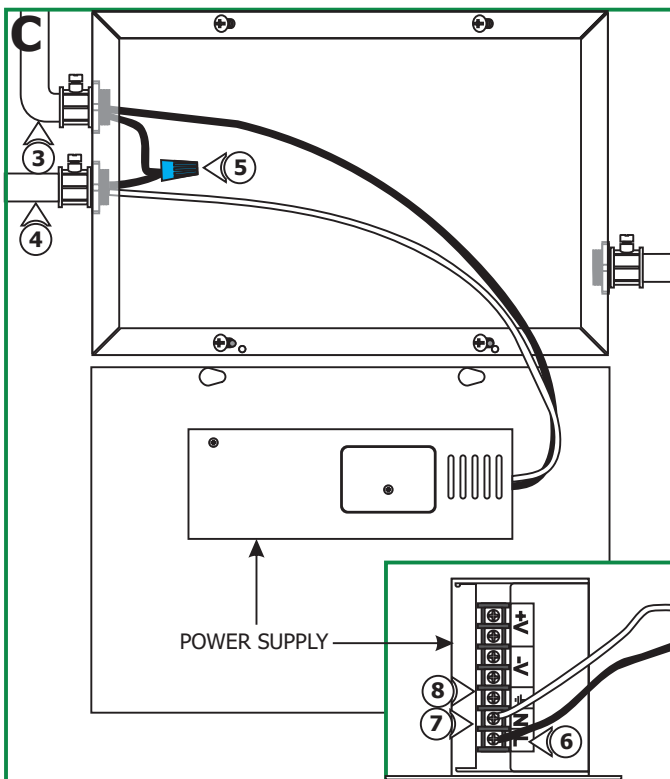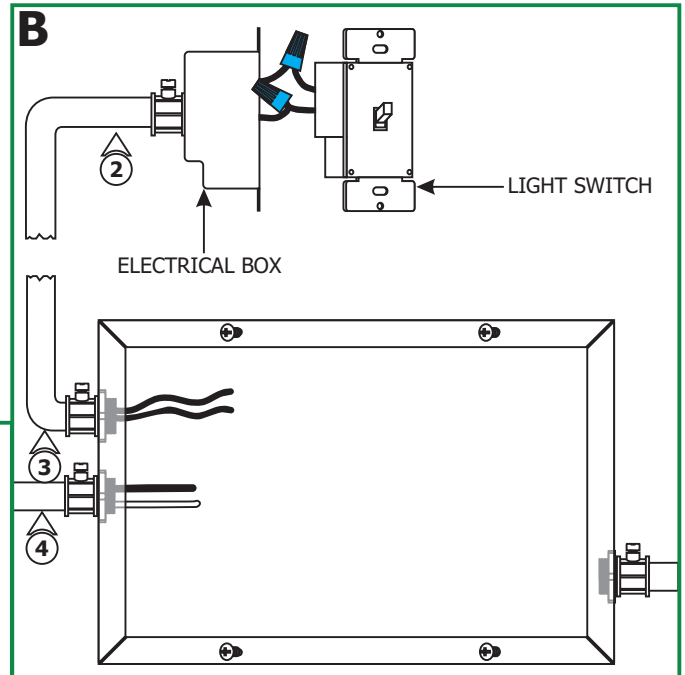

- 5:** Connect the hot power wire to one of the wires coming from the switch with a wire nut.
- 6:** Run the other switch wire to the power supply "L" terminal.
- 7:** Run the neutral power wire to the power supply "N" terminal.
- 8:** Make sure the power supply terminal is grounded in accordance with local electrical codes.

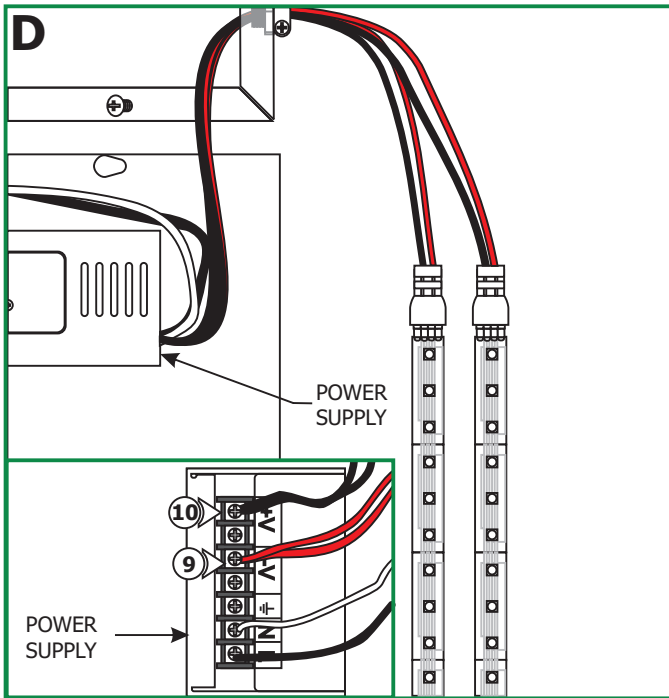


NOTE: This power supply is for multiple runs. Do not exceed the maximum wattage of the power supply.

NOTE: Use only 12 volt RGB LED soft strip with this power supply.

9: Connect the LED soft strip red wire into the power supply "+V" terminal.

10: Connect the LED soft strip black wire into the power supply "-V" terminal.


Installing LED Power Supply with RGB Soft Strip & CDP or CTP Controller

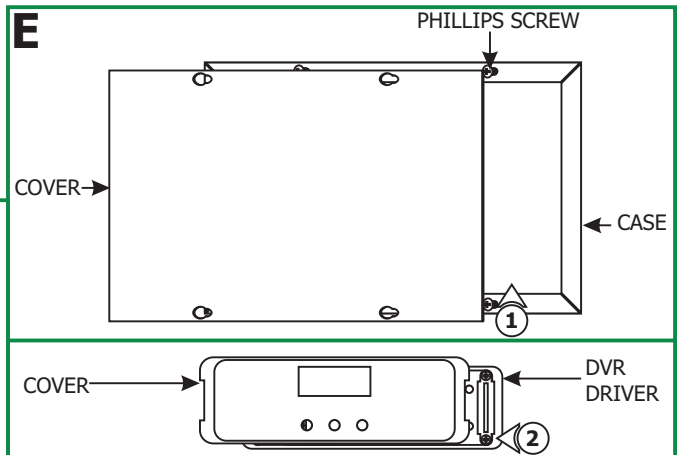

NOTE: Use a DVR-RGB-200 (Sold Separately) with this power supply. The power supply and the DVR-RGB-200 are installed on the back of the power supply cover.

1: Loosen the four Phillips screws on the front of the power supply cover to slide the cover off of the case.

2: Carefully pull off the cover from the DVR-RGB-200 driver.

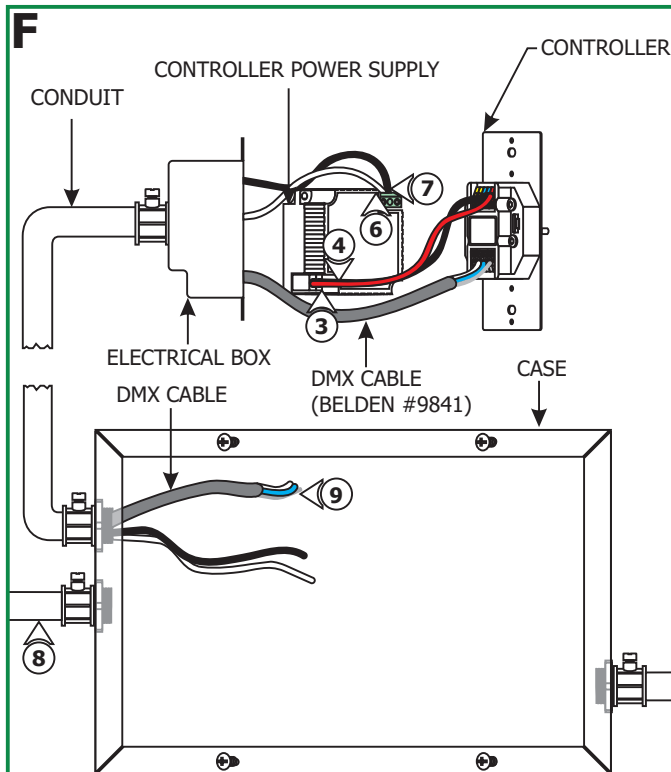

NOTE: Use a deep double gang boxes to fit the controller and controller power supply (OT-20-120-240-245 recommended).

NOTE: Refer to the "Configuring DimWheel" & "Operating DimWheel" on page 6 & 7 to properly operate the controller.

3: Connect one end of a red wire to "VDC+" of the controller terminal and the other end of the red wire to the "+24VDC" of the power supply terminal.

4: Connect one end of a black wire to "Ground" of the controller terminal and the other end to the "-24VDC" of the power supply terminal.


5: Run the black and white line voltage wires coming from the controller power supply to the power supply case.

6: Connect the white wire to "N" terminal of the controller power supply.

7: Connect the black wire to "L" terminal of the controller power supply.

8: Install conduits from controller, main panel (line voltage), and soft strip to power supply.

9: Run proper DMX cable (**Belden #9841 recommended**) with three data wires from controller to the power supply box.

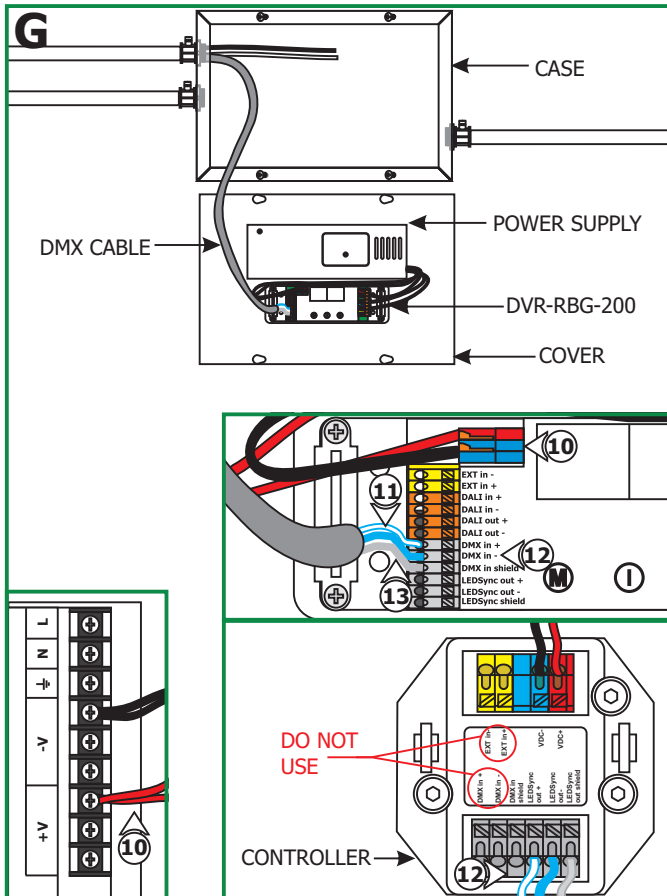

10: Install a red wire from the power supply "+V" terminal to DVR-RGB-200 "VDC+" red terminal and a black wire from power supply "-V" terminal to DVR-RGB-200 "VDC-" blue terminal.


11: Connect one end of a data wire (blue with white stripes wire) to controller "LEDSYNC OUT-" terminal. Connect the other end into the DVR-RGB-200 "DMX in -" terminal.


12: Connect one end of a data wire (white with blue stripes wire) to controller "LEDSYNC OUT+" terminal. Connect the other end into the DVR-RGB-200 "DMX in +" terminal.

13: Connect one end of a data wire (bare shield wire) to controller "LEDSYNC SHIELD" terminal. Connect the other end into the DVR-RGB-200 "DMX in shield" terminal.

NOTE: "DMX in+", "DMX in-", "EXT in+" & "EXT in-", controller terminals are not used on controller.

- 14:** Run the line voltage power wires into the power supply.
- 15:** Connect the black power wire and the black controller wire to the "L" terminal of the power supply.
- 16:** Connect the white power wire and the white controller wire to the "N" terminal of the power supply.
- 17:** Make sure the power supply ground terminal is grounded in accordance with local electrical codes.
- 18:** Connect three black wires to the DVR-RGB-200 "GROUP 1 GND", "GROUP 2 GND", and "GROUP 3 GND" black terminal to the power supply "-V" terminal.

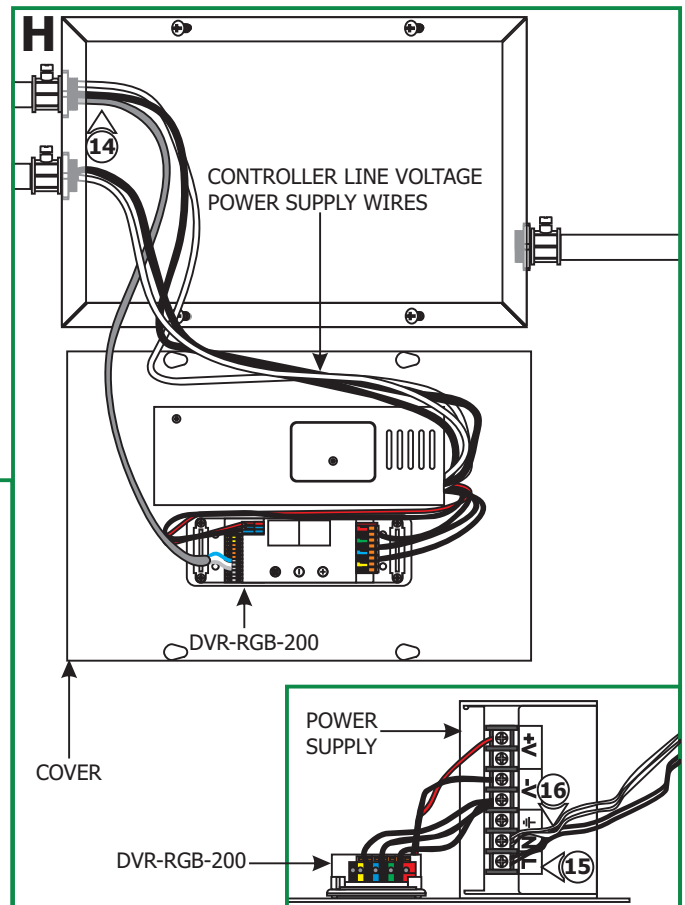

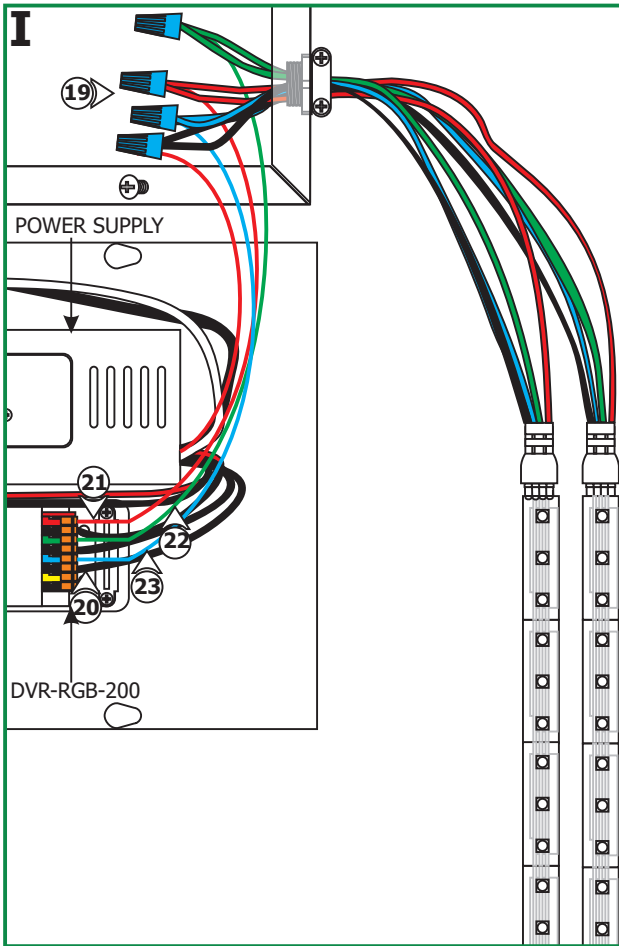

NOTE: The DVR-RGB-200 terminals adapt maximum 18 AWG size. To avoid voltage drop, use 6" of 18 AWG size in RGB terminals connected inline to proper size gauge wire attached to the RGB LED wires with wire nuts. See the "Low Voltage Wire Size Chart" on page 1.

19: Use the "Low Voltage Wire Size Chart" on page 1 to determine proper wire size connecting to the DVR-RGB-200 terminals.

20: Run the proper size green, red, blue, and black wires from the RGB LED soft strip to the power supply case.

NOTE: This power supply is for multiple runs. Do not exceed the maximum wattage of the power supply.

NOTE: Use only 12 volt RGB LED soft strip with this power supply.

21: Connect the black wire into power supply "+V" terminal. Connect the other end to RGB soft strip black wire(s).


22: Connect the red wire into DVR "Group 1-" red terminal. Connect the other end to RGB soft strip red wire(s).


23: Connect the green wire into DVR "Group 2-" green terminal. Connect the other end to RGB soft strip green wire(s).

24: Connect the blue wire into DVR "Group 3-" blue terminal. Connect the other end to RGB soft strip red wire(s).

25: Replace the DVR-RGB-200 cover.

26: Replace the power supply cover and secure it by tightening the four Phillips screws.

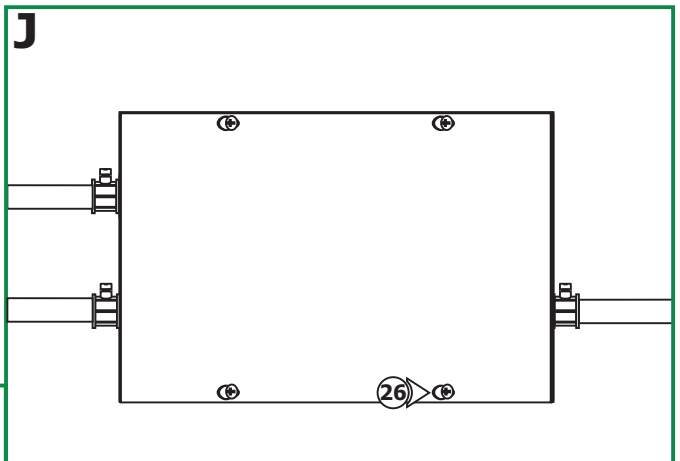


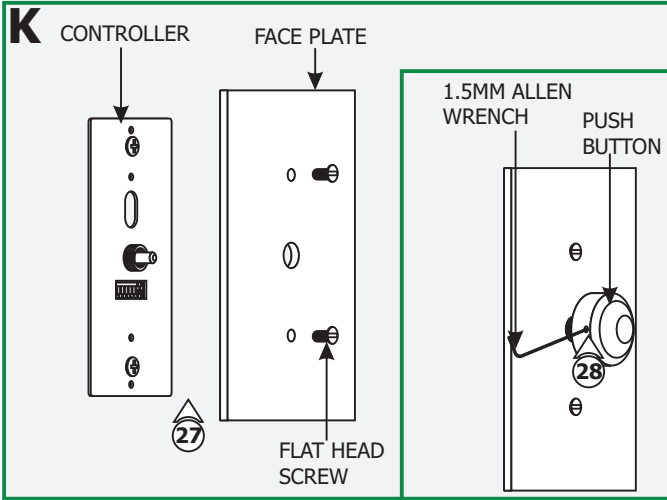


27: Align the face plate to the controller and secure using the two flat head screws.

28: Attach the push button onto the controller center rod and secure by tightening the M3 set screw with the 1.5mm Allen wrench provided.

Using LED Power Supply with WW Soft Strip & Standard Switch

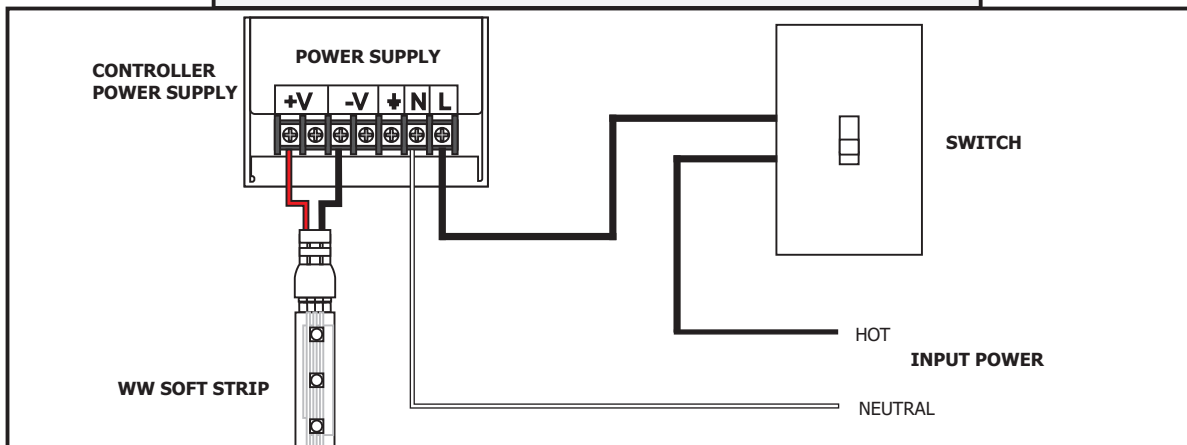

Using LED Power Supply with RGB Soft Strip & CDP or CTP Control

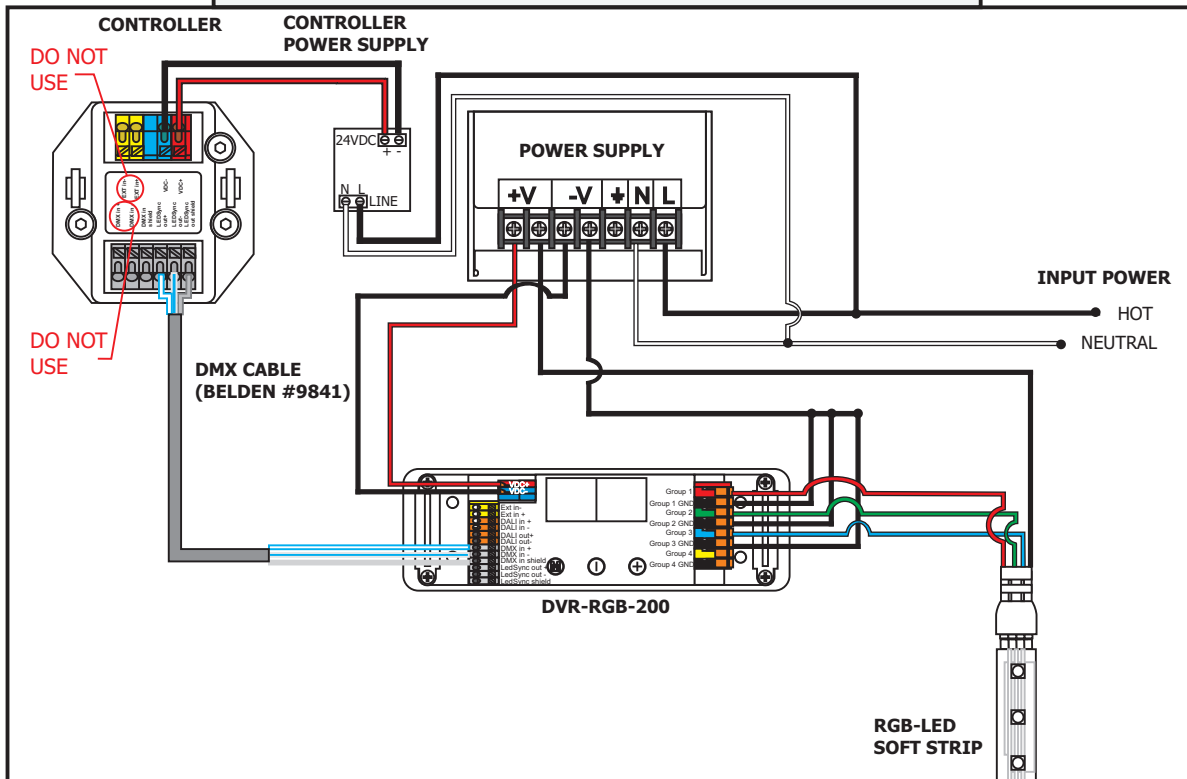

Selecting Modes

Configure your CDP by setting the DIP switches on the front:




COLOR MODE




CHASE MODE

NOTE: The DIP switches must remain accessible after installation. When making changes in the DIP switch settings, disconnect and reconnect the power supply to activate new settings.

Operating CDP

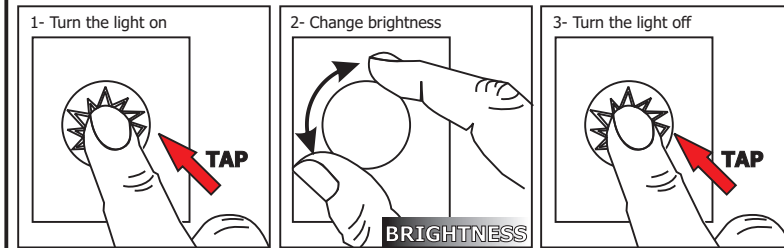

Advanced Operation for Color Mode

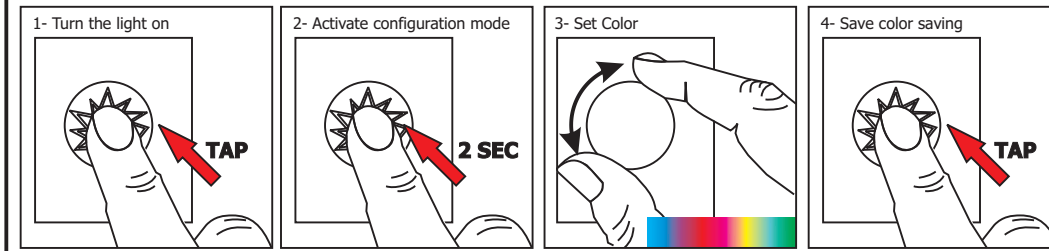

Advanced Operation for Chase Mode

