




BRAND Contrast Lighting

DESCRIPTION

3.5 inch LED IC Airtight housing is suitable for insulated ceiling. Below ceiling accessible. Electronic driver included. Universal input voltage driver 120-277 volt. Dimmable with electronic low voltage 120 volt dimmer. 3.6 inch ceiling cut out. For use with LED Power 2 18 watt 2700K, 18 watt 3000K, and 15 watt 4000K. Compatible with trims LEDR345, LEDR347, LEDR314, LEDR315, LEDS345, LEDS314, LEDS315. 19.5 inches long x 10 inches wide x 6 inches high. UL listed.



TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	18W
DIMMER	Dimmable
DIMENSIONS	19.5"L x 10"W x 6"H
BULB NOT INCLUDED	
LAMP	LED/120V LED
Technical Information	
LAMP COLOR	2700K
FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
APERTURE SHAPE	Round
SPEC #	CLT106615

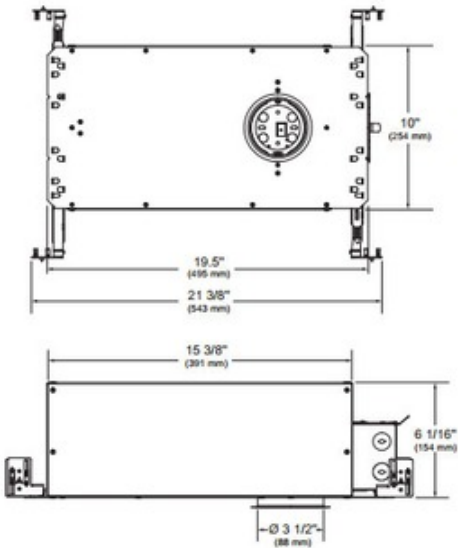

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE