

### SAVE THESE INSTRUCTIONS



#### CAUTION: RISK OF FIRE:



Never replace a Xenon lamp with a regular Halogen lamp.  
A regular Halogen lamp requires a protective glass shield.


- This product must be installed by a qualified electrician.
- Turn off power at circuit breaker before installing.
- To reduce risk of fire or electrical shock use this fixture indoors only.
- This product is **ETL** listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.
- Use MAX 35 Watt, Xenon Bi-Pin Lamp.

### ADJUST THE FIXTURE HEIGHT


- 1** Feed the fixture wire in place. it is important that the strands of the outer wrapping be inside the strain relief, with no strands hanging outside the strain relief.coaxial cable through the bottom of the glass shade and pull it up through the top hole.
- 2** Slide the glass shade down the cable and rest the glass on the socket assembly.

Cut the coaxial cable to the desired length with a sharp cutter.

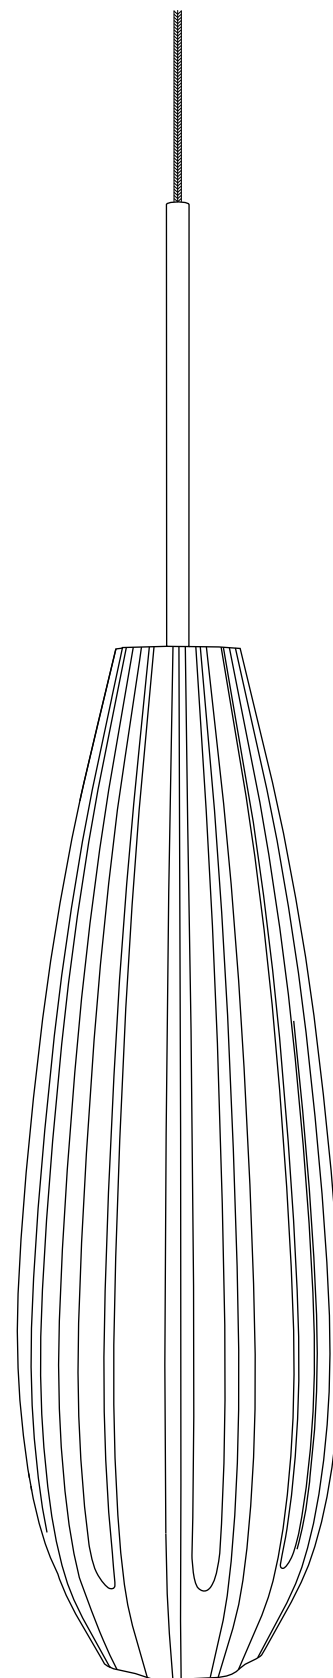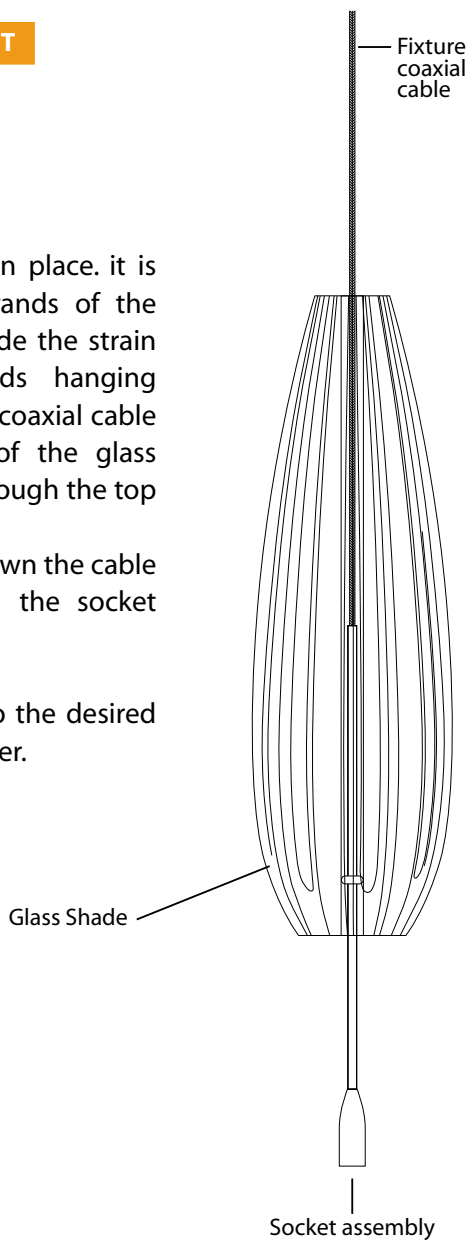

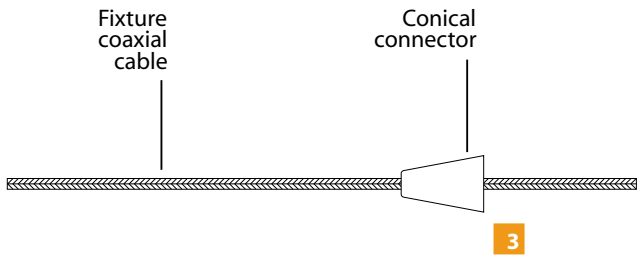

**3** Insert the coaxial cable into the cone shaped connector through the narrow end and exiting the wide end.

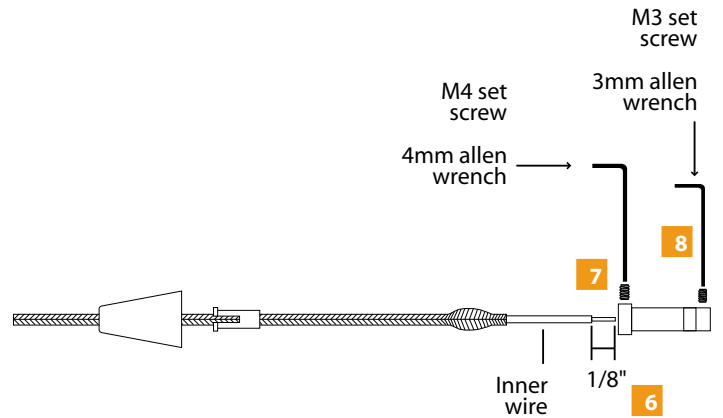


**6** Strip 1/8" of insulation from end of inner wire. Make sure that the stripped portion is not more than 3/16" long.

**7** Loosen (Do Not Remove) the M4 set screw with the provided matching allen wrench.

**8** Remove the M3 set screw with the provided matching allen wrench.




**4** Insert the coaxial cable through the flared end of the strain relief.

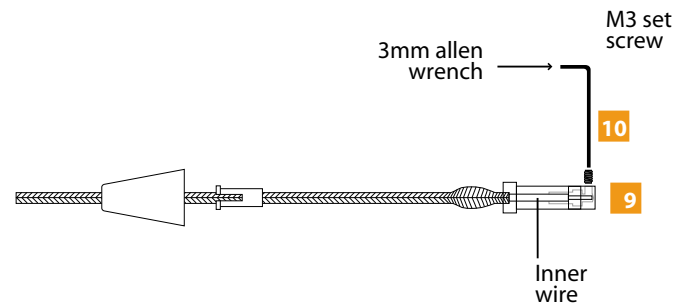


**9** While inserting the inner wire into the connector look through the set screw hole to make sure that the stripped portion of the inner wire contacts end of the connector.


**10** Hold the coaxial cable in place; replace and tighten the M3 set screw with the provided matching allen wrench. Lightly tug on the coaxial cable to make sure that the set screw connection is tight.

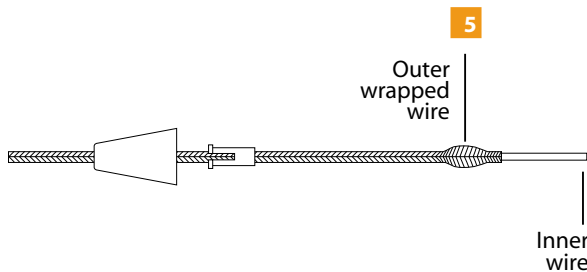

**5** After RGE coaxial cable is inserted through the strain relief, slide the outer wrapping of the cable back to expose the inner wire, approx. 1".

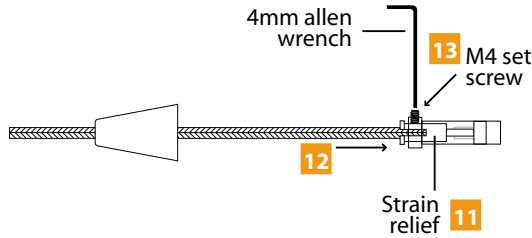


- 11** The strain relief slots should be rotated 90° away from the M4 set screw, so that the screw does not fall into the slot in the strain relief.
- 12** Slide and push the strain relief completely into the connector. This will force the outer wrapped wire to be inserted into the connector.
- 13** Tighten the M4 set screw with the provided matching allen wrench, so that the strain relief holds the outer wrapped wire in place. It is important that the strands of the outer wrapping be inside the strain relief, with no strands hanging outside the strain relief.

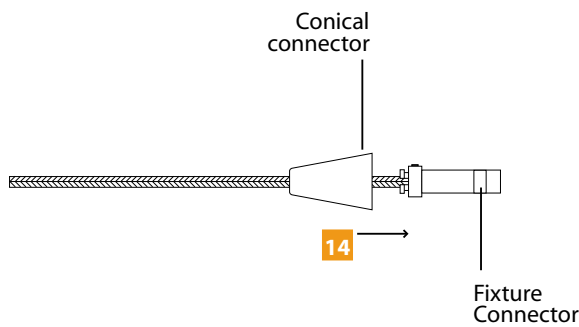

- 14** Slide the conical connector over the fixture connector.
- To install the fixture, refer to the instructions provided with the system.


**SAVE THESE INSTRUCTIONS**

**INSTALL THE LAMP**

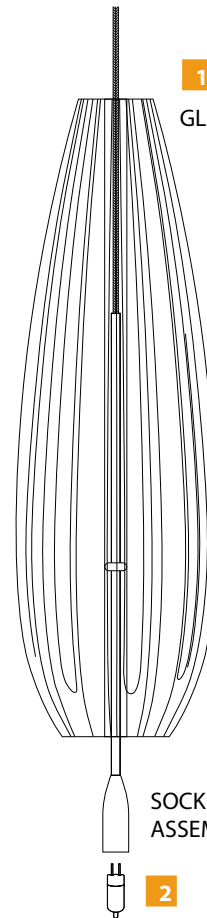

- 1** Lift the glass shade up to expose the socket.
- 2** Push the lamp pins completely into the socket holes.

- 3** Lower the glass shades onto the socket assembly

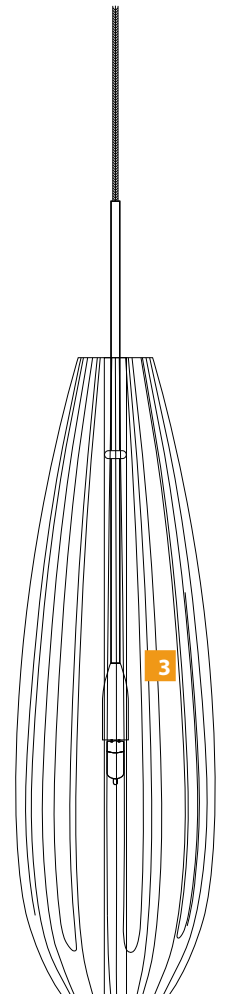

**NOTE:**

Use only your fingers and soft cloth to replace the lamp.

Use MAX 35 Watt,  
Type Xenon Bi-Pin Lamp.

**WARNING: RISK OF FIRE**

Never replace a Xenon lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.