

IT4000CM 3 Inch 20W MLV Non-IC Shallow Remodel Housing



Description:

IT4000CM 3 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer included. One 20 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 3.25 inch ceiling cut out. 11.9 inch length x 4.25 inch width x 3.2 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Galvanized Steel

List Price: \$91.00
 Our Price: \$65.52

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR16/GU5.3 (bipin)/20W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
 Wattage: 20W
 Dimmer: Low Voltage Magnetic
 Dimensions: 11.9"L x 3.2"H x 4.25"W

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Housing Height: 4"
 Aperture Size: 3.000"

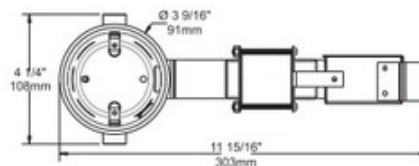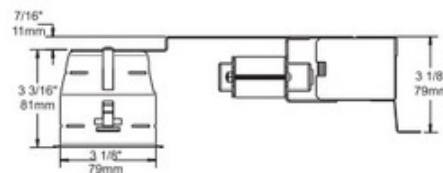

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com

Product Number: CLT106652			
Company:		Fixture Type:	Date: Feb 18, 2018
Project:		Approved By:	