


WARNING!



Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDs are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

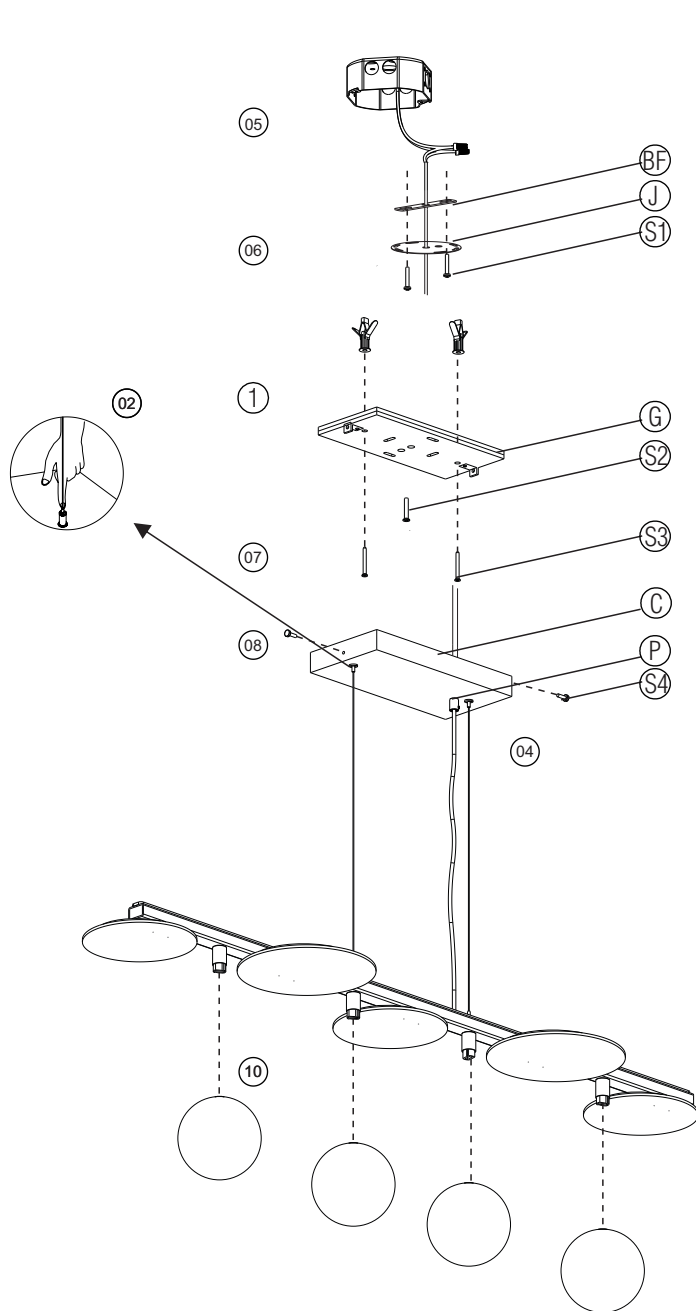


 ø8mm /
 ø5/16"

Line: Luna
 Family: Pendant
 Description: Pendant Accord Luna

Input voltage: 120 - 240V
 Input frequency: 60Hz

Material: Natural Wood Venner and MDF.


Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

Turn off the electrical power before starting the installation, and keep it turned off until the installation is completed.

Remove the protective packaging, taking care not to cut or scratch the wooden pieces.

- ① Using the base (G) as template, drill with a 8mm drill bit at the two fixing points of the base on the ceiling. Insert the anchors into the holes.
- ② Then, insert the steel cables into the canopy. To adjust the height, press the locking pin while sliding the cable up or down, accordingly. When releasing the pin, the cable locks in the chosen position, securing the luminaire at the desired height.
- ③ Pull the excess cable through after the adjustment, making sure that no loose cables remain visible outside the luminaire.
- ④ Pass the power cable through the conical cable gland (P), attached to the canopy (C), through the central holes of the structural base (G) and junction box cover (J) and, adjust the height as desired.
- ⑤ Make the electrical connections in compliance with all the safety standards and local electrical codes. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and hazards involved.
- ⑥ Fix the (BF) bracket and junction box cover (J) into the junction box.
- ⑦ Using the pre-formed screws (S3), screws the structural base to previously fixed bushings, and ensure that the installation is secure.
- ⑧ With the structural base in place, fit the canopy onto the base and fasten it using the finishing screws (S4).
- ⑨ Insert the excess power cable through the cable grommet and tighten the side screw to lock it in place.
- ⑩ Install the G-9 bulb with a maximum power of 8W. Then screw the bulb clockwise until it is firmly in place. Repeat this procedure for all sockets.

PROVIDED SCREWS



Turn on the electrical power.
 The luminaire is ready for use.

ATTENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY
 CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
 Its recommended to read these instructions completely and carefully
 before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including
 electrical components and finishes, for a period of three years, under normal
 use, from the date of purchase. For warranty service, please contact your local
 dealer for further instructions. Proof of date of purchase will be required for
 validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the
 correct observation of the instructions contained in this manual.
 The manufacturer is not responsible for any damage to the product caused by
 accidents, alterations of any kind, improper usage or improper installation.
 See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.