



BRAND

Contrast Lighting

DESCRIPTION

IT5000CE 2.5 Inch Low Voltage Non-IC Shallow Remodel Housing is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 20 watt, 12 volt MR11 bipin bulb is required, but not included. Dimmable with a low voltage electronic dimmer. Suitable for damp locations. UL listed. 2.6 inch cut out. 9.5 inch length x 3.9 inch width x 3.4 inch height. A complete fixture includes a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	20W
DIMMER	Low Voltage Electronic
DIMENSIONS	9.5"L x 3.8"W x 3.4"H
BULB NOT INCLUDED	
LAMP	1 x MR11/Bipin/20W/12V Halogen

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	4"
APERTURE SIZE	2.500"

SPEC # CLT106653

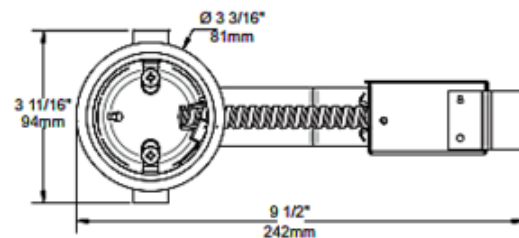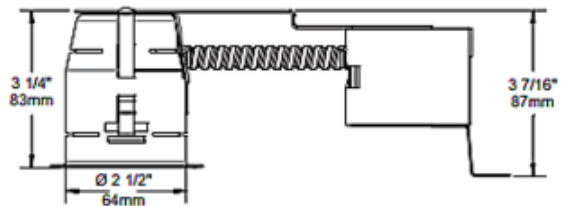

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE