



BRAND

Contrast Lighting

DESCRIPTION

3.5 inch beveled regressed shower trim with square pinhole opening in Matte White, Satin Nickel, Chrome, Architectural Bronze, Black, 24K Gold, Brushed Chrome, Antique Copper, Antique Brass, Antique Silver, Brushed Nickel, White, Satin Nickel or Almond. Comes standard with Frosted Lens and anodized aluminum reflector. Also available with Clear or Frosted with Clear center lens as well as painted White, Black or Matte White reflector, specular Black, Champagne or Clear reflector, or anodized Azur, Burnt Orange, Cobalt Blue, Inca Gold or Ruby reflector. For use with 20 watt 12 volt MR16 low voltage housings ISMR3000E20, ISMR3000M20. For use with 35 watt 12 volt MR16 low voltage housings ISMR3000E35, ISMR3000M, ISMR3000M35. For use with 37 watt 12 volt MR16 low voltage housings NW3000CE, NW3000CM. For use with 50 watt 12 volt MR16 low voltage housings IT3000LE, IT3000LM, NW3000LE, NW3000LM. For use with 50 watt 120 volt GU10 line voltage housings IT3000LT, NW3000LT. 4.4 inch diameter x 2.25 inches high. Suitable for wet location. UL listed. Lamp not included.





TRIM COLOR	Frosted
BODY FINISH	Matte White
WATTAGE	N/A
DIMMER	Dimmable
DIMENSIONS	4.4"W x 2.25"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

FUNCTION	Shower/Wet Location
CEILING TYPE	Drywall with Trim
APERTURE SHAPE	Pinhole
APERTURE SIZE	1.000"

SPEC # CLT106867

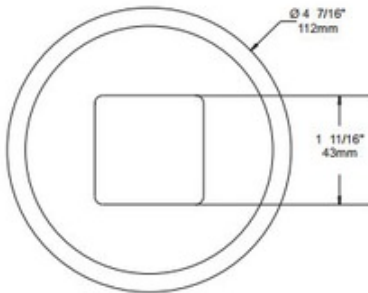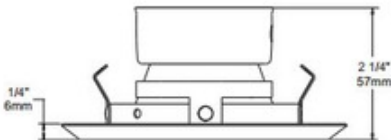

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE