

BERT FRANK

COLT PENDANT LIGHT

MAINTENANCE

- Lacquered brass should be wiped with a soft duster.
- Do not clean with any liquid, chemical or abrasive cleaners.
- All electrical work must be conducted by a qualified electrician.

TECHNICAL

Colt Single Pendant

- 1x LED module = 15.6W 24V 2700K
- 1x INTEGRATED driver = 20W 24V constant voltage

Colt Pendant

- 3x LED module = 15.6W 24V 2700K - 46.8W total
- 3x INTEGRATED driver = 20W 24V constant voltage

www.bertfrank.co.uk
+44 (0)207 164 6482

INSTRUCTION


1

- Consider position of the ceiling plates for Colt pendant or single pendant. Power will be connected to one ceiling plate.
- Mount ceiling plates using suitable fixings.
- Ceiling plates must be mounted accordingly:
- Single Colt Pendant = only one ceiling plate required
- Colt Pendant = 477mm apart (measuring from closest edge)




2

- Feed mains power through mounting plates.
- Secure mounting plates to ceiling using suitable fixings.
- If required, secure 2nd mounting plate, ensuring the distance between mounting plates is correct.

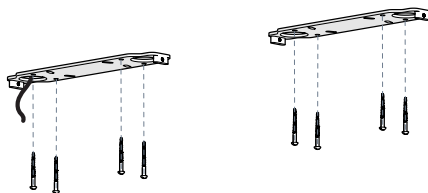


3

- Decide on desired drop height of fixture
- Take the end of the steel wire and feed down the barrel attached to the top of the shade. It will feed out the side hole. The barrel will grip the wire automatically. Repeat for both ends of fixture.
- To loosen, press down the barrel to release the grip on the wire.
- Repeat for opposite end of steel wire into barrels on ceiling plate.

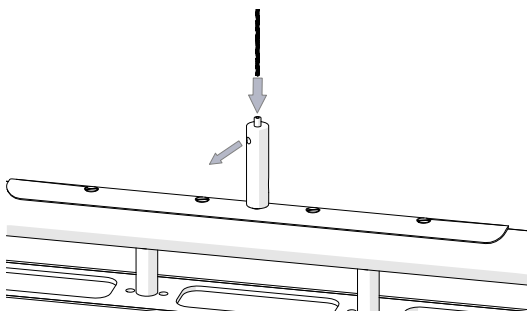

4


- Feed the electrical flex from the pendant up into side hole of the connection barrel and into the ceiling plate.
- Make electrical connection to mains power.
- Electrical work must be conducted by a qualified electrician.
- Connector block not supplied.

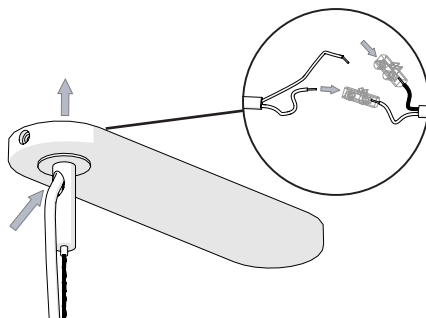

INSTRUCTION


5

- Supporting the light, fix the covering plates to the ceiling plates using the screws provided.

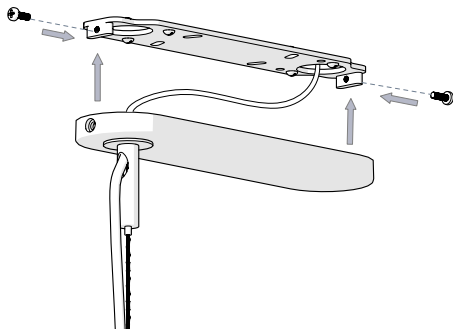

6


- Adjust steel wires to desired height, ensure pendant is straight and level, then cut excess wire.

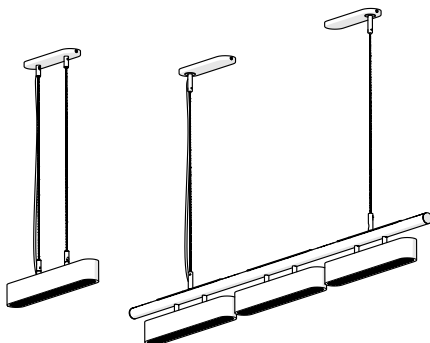

LED 'BULB' REPLACEMENT INSTRUCTION


1

- Remove 2x screws from each end of top of fixture.
- Carefully slide brass shade off assembly to expose LED module.

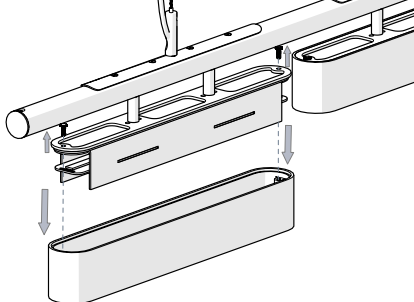


3

- Unwire mains power from driver and remove LED module.
- Connect replacement LED module by rewiring mains power into replacement driver and insert LED plate back into LED bracket.
- Ensure side with double LED strip is facing out.
- Electrical work must be conducted by a qualified electrician.

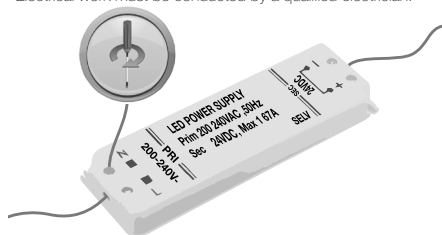


2

- Pull back both sides of LED bracket slightly to release LED plate.
- Remove LED plate from bracket

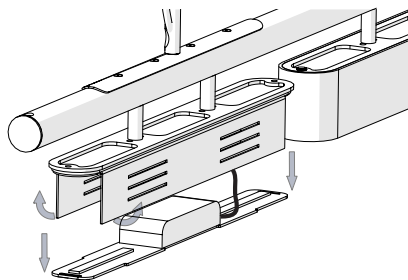

4

- Replace brass shade and secure using 2x screws.

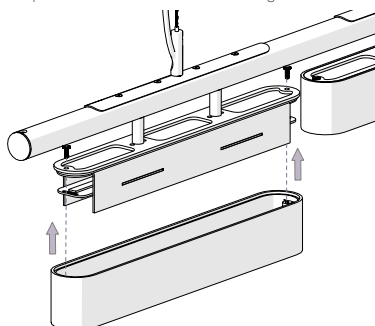

This product is only suitable for connection to the native power supply to which the unit was specifically manufactured. It is for indoor use only, and not suitable for a bathroom location.

If the Class II, double insulated symbol is on the lamp, it does not require an Earth, and Live or Neutral must not be connected to Earth. If there is no such symbol, then the lamp must be Earthed.

Under no circumstances must this lamp be covered with any material as this could pose a safety hazard. It must be used on a stable, flat surface.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting. If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

If you are in any doubt about your competence please consult a qualified electrician. If any modification is made it will invalidate the warranty and may render the product unsafe.