



BRAND

Juno Lighting

DESCRIPTION

6 Inch 900 Lumen 120 Volt Generation 4 LED IC Remodel Housing is a dedicated LED, Air-Loc remodel housing with integral light engine. Shallow housing allows for fit in 2 x 6 construction. IC remodel housing for remodel application where back side of ceiling is not accessible and can be completely covered with insulation. When used with supplied ALG kit, stops infiltration and exfiltration of air, reducing heating and air cooling costs. Replaceable light engine mounts directly to slider plate and incorporates the latest generation high lumen output LED array. Comparable light output to 75 watt PAR30 incandescent while consuming less than 16 watts. Available with 2700K, 3000K, 3500K, or 4100K color temperature, 90 minimum CRI. Wide flood distribution shipped as standard. Optional optic accessories available, sold separately. 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers (see attached manufacturer dimmer compatibility reference). Life rated for 50,000 hours at 70 percent lumen maintenance. Energy Star. Title 24 compliant with select trims. UL listed for damp locations. 5 year limited warranty. 14.5 inch length x 7.25 inch width x 5.1 inch height. A complete fixture includes a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	16W
DIMMER	Dimmable
DIMENSIONS	14.5"L x 7.25"W x 5.1"H
INTEGRATED LED MODULE	
LAMP	1 x LED/120V LED

Technical Information

LUMINOUS FLUX	900 lumens
LUMENS/WATT	56.25
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
LAMP LIFE	50000 hours
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel IC

SPEC #

JUN111099

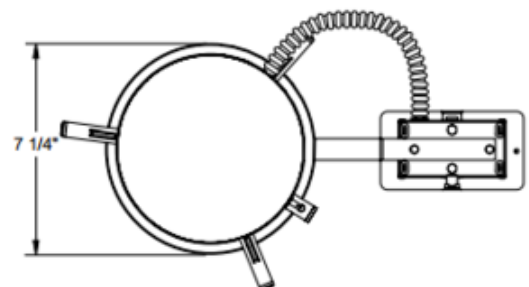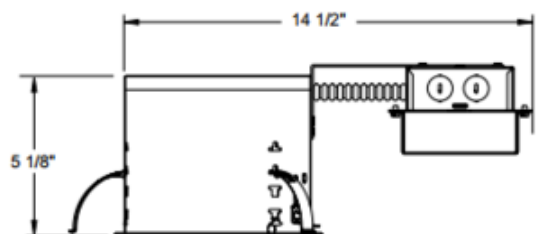

6 3/4" CEILING CUTOUT

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE