



Monorail Surface Mount Kit with 300W 12V electronic transformer includes everything you need for a complete system — just add fixtures. Kit includes surface mount electronic 300 watt 12 volt transformer, Monorail, appropriate quantities of 1" standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

Length:


4, 8, 12, 16, 20, 24, 28 or 32 feet
1.2, 2.4, 3.7, 4.9, 6.1, 7.3, 8.5 or 9.8 meters

Dimming:

With electronic dimmer

Standard Mounting:

Rail mounts 1" (2.5cm) from ceiling. For 6"- 96" (15.2cm-243.8cm) power and standoff lengths, see below.

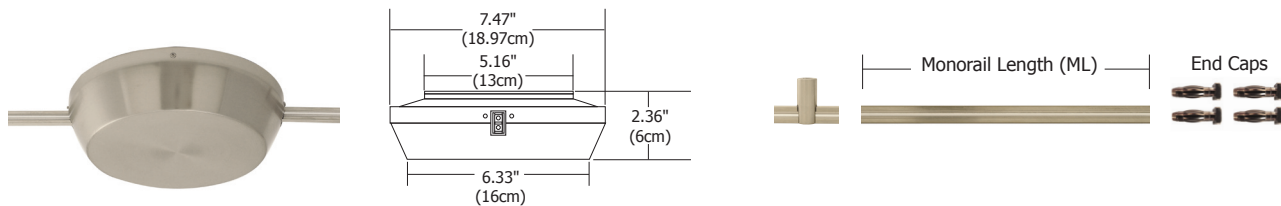

Transformer Type	Wattage	Voltage Output	Monorail Length (ML)	Finish	Voltage Input
MTE	300	12	K4	SN	Standard 120 Volt (leave blank)
<small>MTE Monorail Surface Mount Electronic Transformer</small>	<small>300 300 Watt</small>	<small>12 12 Volt Single Feed</small>	<small>K4 Kit with 4' (1.2m) Monorail</small> <small>K2x4 Kit with two 4' (2.4m) Monorail</small> <small>K8 Kit with 8' (2.4m) Monorail</small> <small>K12 Kit with 12' (3.7m) Monorail</small> <small>K16 Kit with 16' (4.9m) Monorail</small> <small>K20 Kit with 20' (6.1m) Monorail</small> <small>K24 Kit with 24' (7.3m) Monorail</small> <small>K28 Kit with 28' (8.5m) Monorail</small> <small>K32 Kit with 32' (9.8m) Monorail</small>	<small>SN Satin Nickel</small> <small>PN Polished Nickel</small> <small>BZ Antique Bronze</small>	<small>2 230 Volt</small>

PROJECT: _____ FIXTURE TYPE: _____ DATE: _____