



# PURE SMART™ Wi-Fi SWITCH

FOR TRADITIONAL NON-SMART BULBS & FIXTURES, CONNECTED BY WIZ PRO



REV 05.17.23



### DESCRIPTION:

The Pure Smart™ Wi-Fi Switch connects to the WiZ app and WiZ Pro Dashboard through your home Wi-Fi. Compatible with traditional non-smart bulbs and fixtures.

### OPERATION

Features an ON/OFF button. 1200W Maximum Load. 2.4GHz Wi-Fi only. No Hub Required.

### BODY

Durable polycarbonate body. Compatible with decorator style wall plate (Not Included).

### EASY INSTALLATION

The Pure Smart™ Wi-Fi Switch installs just like a regular in-wall switch. Can be used in Multi-Location applications (Reference Wiring Diagrams in Instruction Manual for 3-way). Compatible with standard gangable boxes. Requires neutral wire. No Hub Required.

### WIZ APP

The Pure Smart Wi-Fi Switch can be controlled via the WiZ app (works with iOS and Android) from anywhere. Voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, and scheduling can all be programmed with the WiZ app or WiZ Pro Dashboard.


### SECURITY

3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.



## SPECIFICATIONS

|                       |  |
|-----------------------|--|
| Approved Location     | Dry / Indoor                                 |
| Input Voltage         | 100-240VAC, 50/60Hz                          |
| Certification         | cULus, FCC                                   |
| Compatible Load(s)    | Any Non-Smart Bulb or Fixture                |
| Maximum Power         | 1200W Incandescent<br>600W CFL/LED Retrofit  |
| Output Current        | 10A/5A                                       |
| Operating Temperature | 23°F~113°F (-5°C~45°C)                       |
| Wireless Frequency    | 2.4GHz                                       |
| Radio Frequency       | Certified IEEE 802.11,<br>Wi-Fi 2.4Ghz radio |
| Wireless Standard     | IEEE 802.11                                  |
| Warranty              | 3-Year                                       |

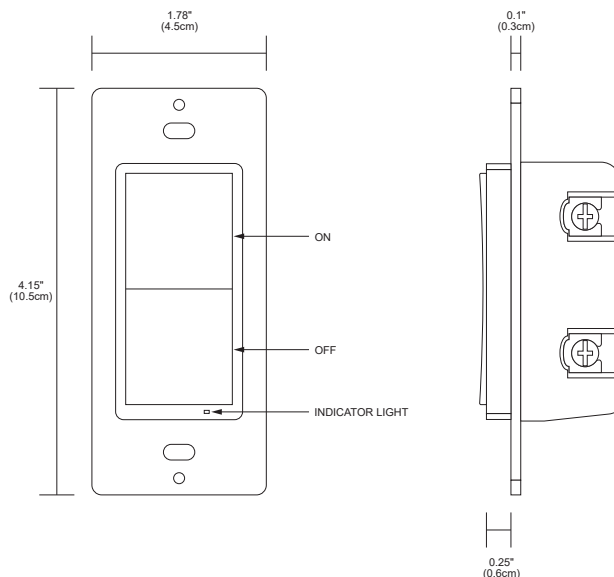

| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|
|---------|--------------|------|




# PURE SMART™ Wi-Fi SWITCH

FOR TRADITIONAL NON-SMART BULBS & FIXTURES, CONNECTED BY WIZ PRO




## NETWORK TOPOLOGY

### Traditional Non-Smart Bulbs & Fixtures

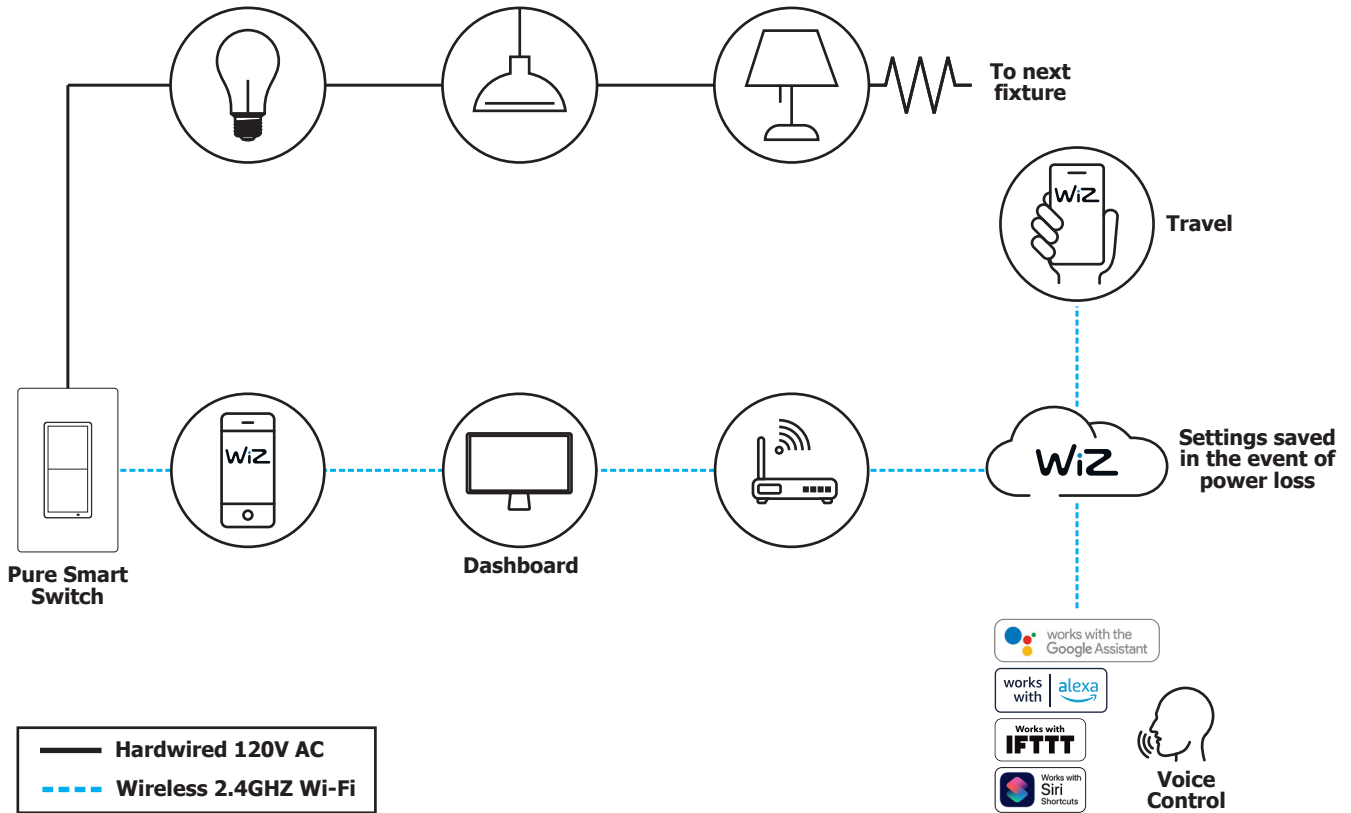


## WIRING DIAGRAMS

### Single-Pole Application using SWW-SWT-WH

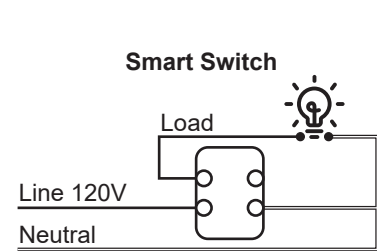

### 3-Way Application using SWW-SWT-WH

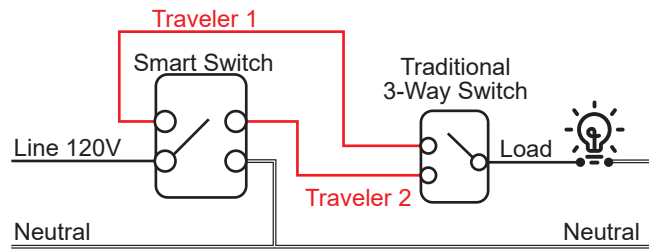

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|