

# IL116 Inground Uplight with Trim Ring 7W 36 Deg



**Description:**


IL116 7 Watt 36 Degree Flood LED Inground Uplight housing is fabricated from a single piece of compression molded fiberglass reinforced polyester composite pressure tested to ensure water will not wick or leak through. Bronze finish trim ring is a textured composite material. Natural Brass trim ring is a metal finish. Clear convex, tempered soda-lime glass for high impact resistance. 2200 pound live-load rated, standard walk-over lens. 7 watt lamp 2700K color temperature LED lamp with 36 degree beam spread included. Available in a 24 degree narrow flood and 36 degree flood version. 30,000 hour lamp life. Lamps have 15 degree articulation either side of vertical and 358 degree rotation without interruption of beam pattern. Pre-wired with 3 foot pigtail of 18-2 AWG wire. Includes low voltage quick connector LVC3 for easy hook up to the low voltage supply cable not included. 6.6 inch diameter x 8.4 inch height. ETL listed for wet locations. Required transformer, optional mounting and optical accessories sold separately.

Shown in: Bronze / Clear

List Price: \$251.38  
 Our Price: \$150.83

Shade Color: Clear  
 Body Finish: Bronze  
 Lamp: 1 x LED/7W/12V LED  
 Wattage: 7W  
 Dimmer: Dimmable  
 Dimensions: 8.4"H x 6.6"W

Technical Information  
 Lamp Color: 2700 K

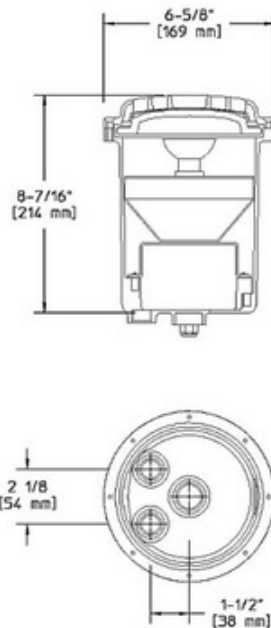

|                                    |  |               |                    |
|------------------------------------|--|---------------|--------------------|
| Product Number: <b>HAD 1 19543</b> |  |               |                    |
| Company:                           |  | Fixture Type: | Date: Feb 21, 2018 |
| Project:                           |  | Approved By:  |                    |

#0810LD-IL11FLW-007L1-CLBZ

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com