Lightology

IL116 Inground Uplight with Trim Ring 7W

HAD119543


BRAND


Hadco by Signify


DESCRIPTION

IL116 7 Watt 24 or 36 Degree Narrow Flood LED Inground Uplight housing is fabricated from a single piece of compression molded fiberglass reinforced polyester composite pressure tested to ensure water will not wick or leak through. Finish in Bronze or Natural Brass. Bronze finish trim ring is a textured composite material. Clear convex, tempered soda-lime glass for high impact resistance. 2200 pound live-load rated, standard walk-over lens. 7 watt lamp with 24 or 36 degree beam spread included. Bronze finish includes Warm White 2700K LED module. Natural Brass finish includes Cool White 4000K color temperature. 30,000 hour lamp life. Lamps have 15 degree articulation either side of vertical and 358 degree rotation without interruption of beam pattern. Pre-wired with 3 foot pigtail of 18-2 AWG wire. Includes low voltage quick connector LVC3 for easy hook up to the low voltage supply cable not included. 6.6 inch diameter x 8.4 inch height. ETL listed for wet locations. Required remote transformer, optional mounting and optical accessories sold separately.



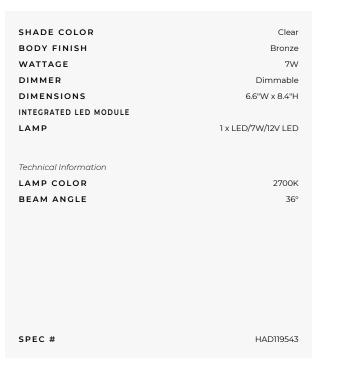





COMPANY PROJECT

FIXTURE TYPE

APPROVED BY

DATE