


Safety & Installation Instructions

v1.4-10.22

- ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS. SUITABLE FOR DRY LOCATIONS ONLY. THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.
- FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. POUR EMPLACEMENT SECS SEULEMENT. L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.
1. Prepare the fitting for installation- consulting the instructions and diagrams on the inside page.
 2. This fitting should be installed on a 4" junction box (not supplied). Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth (ground) terminals.
 3. Attach the wall bracket to your junction box using the two existing bolts.
 4. In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire to the ground terminal or green/yellow wire connected to the fitting.

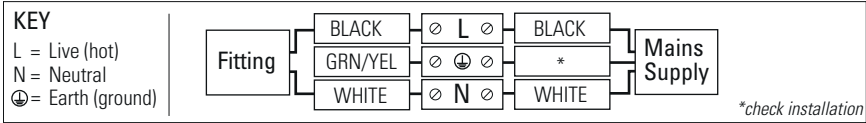

5. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
6. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If damaged contact the manufacturer or his service agent, or a similar qualified person, in order to avoid a hazard. For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

All brass components can be cleaned with a metal polish to remove tarnishing with the exception of the flexible arm. **Do not use polishes or abrasives on the flexible arm as this may compromise the fittings ability to maintain its shade position.** Bone china can be cleaned by hand, with a soft damp cloth with a diluted, mild detergent (nonabrasive) if necessary. The painted metalwork can be cleaned with a soft dry cloth. Switch off power to the fitting before cleaning.


Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxfordshire from high quality components, produced in the UK.

ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Alma Wall Light Instruction Manual

US-FW701 & US-FW702

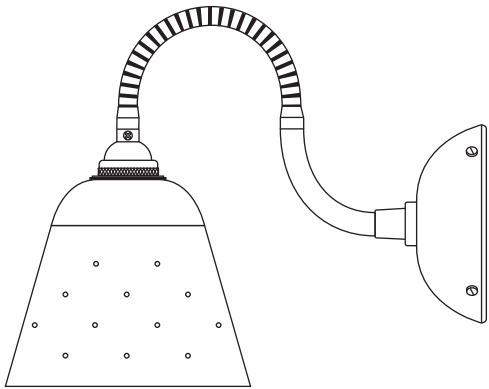

US-FW701

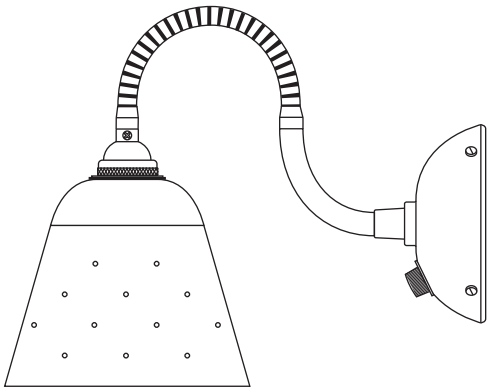

US-FW702



ORIGINAL BTC x BEATA HEUMAN




Alma Wall Light

| 120V AC 60Hz | DRY |

- US-FW701N Alma Wall Light, Natural
- US-FW701R Alma Wall Light, Coral
- US-FW701G Alma Wall Light, Seaweed
- US-FW702N Alma Wall Light, With Dimmer, Natural
- US-FW702R Alma Wall Light, With Dimmer, Coral
- US-FW702G Alma Wall Light, With Dimmer, Seaweed

LAMP GUIDANCE : NB lamp not included			
BASE	SHAPE	TYPE	WATTAGE*
 E26	 A	LED**	6W (recommended)
		Incandescent	40W Max
* Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used. 2700K (warm white) recommended. ** Dimming performance dependant upon lamp used.			

Contents

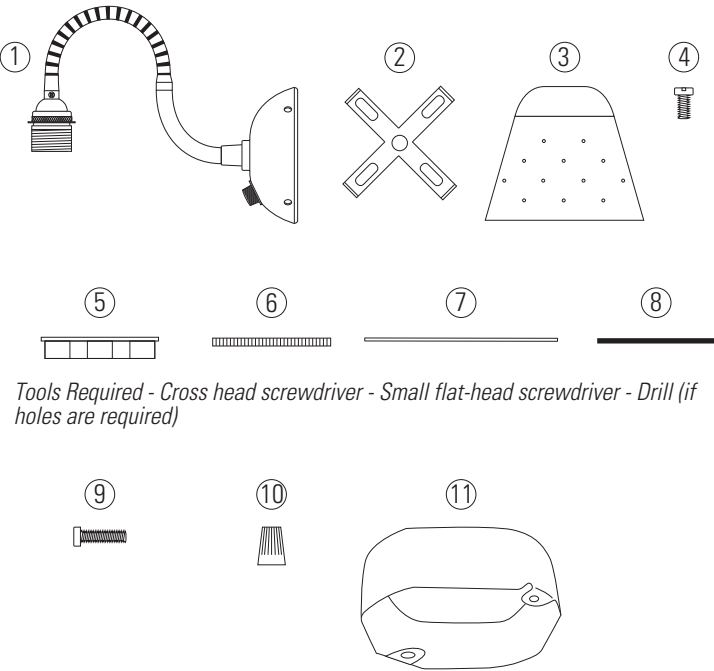

Tools Required - Cross head screwdriver - Small flat-head screwdriver - Drill (if holes are required)


Contents

- 1 Main body
- 2 Wall bracket
- 3 Shade
- 4 Brass screws (x4)
- 5 Plastic shade ring
- 6 Brass shade ring (x3)
- 7 Brass shade disc
- 8 Rubber gasket

Required for Installation

- 9 Junction box screws
- 10 Wire nuts
- 11 Junction box

Installation Diagram

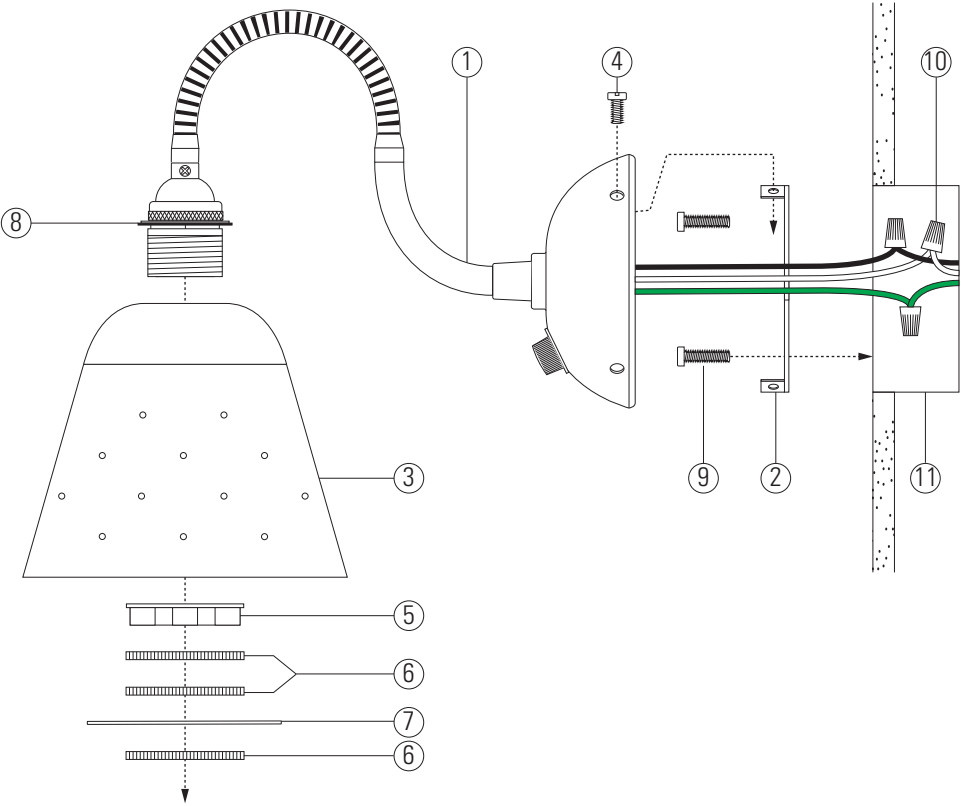

Installation Instructions

Refer to the diagram above and read the Safety & Installation instructions overleaf.

Take care when handling ceramic products during installation.

1. Screw the wall bracket (2) to the junction box (11) using suitable junction box screws (9) as necessary.
2. Make electrical connection (be sure to follow instructions overleaf), using suitable wire nuts (10).
3. Offer the main body (1) up to the bracket (2) and secure using the 4x brass screws (4).
4. Install the shade (3) using the plastic shade ring (5) as a spacer and secure using one of the brass shade rings (6). Ensure the rubber gasket (8) is in position as shown.
5. Install the shade disc (7) using the two remaining brass shade rings (6) to hold in place.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT