


Wireless Wall Switch




The Wireless Wall Switch provides the easiest way of dimming and full smooth dimming range. You have full control over your Mooodi lighting design with one touch! And best of all? There's no need to change your home's wiring, because it works with Bluetooth. The Wireless Wall Switch can be integrated with your existing wall switches, and it charges itself, so there's no need for electricity. Important! The Wireless Wall Switch is currently compatible with the NomNom Light, Starfall Light, Heracleum III family, Gravity Chandelier, Flock of Light 31, and Raimond II R43, R61, R89, Zafu, and Dome.

Detailing

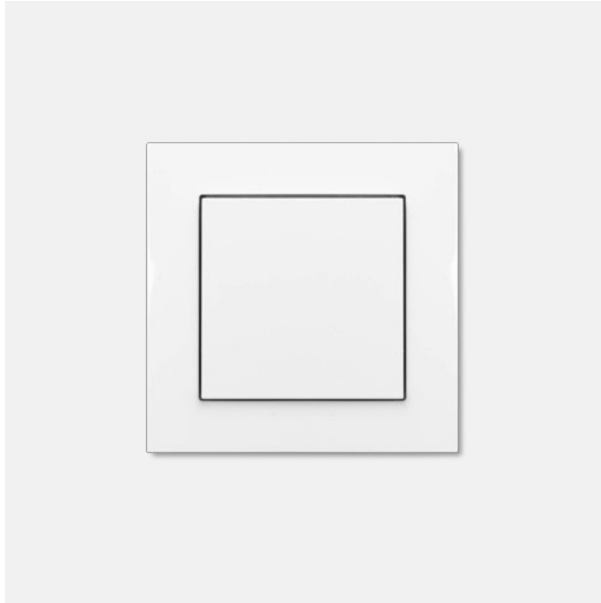

No need to change your home's wiring, because the switch works with Bluetooth. With one simple touch you can enjoy a full smooth dimming range.

Colours




Anthracite

White

Wireless Wall Switch

Dimensions

8,5cm | 3.3"



Product

WIDTH 8.5cm | 3.3"

HEIGHT 8.5cm | 3.3"

DEPTH 1.5cm | 0.6"

Packaging

WIDTH 14cm | 5.5"

HEIGHT 5cm | 2"

CUBAGE 0m³ | 0.04ft³

LENGTH 18cm | 7.1"

WEIGHT 0.2kg | 0.44lbs

SOLOdrive

SOLOdrive offers industry-best Natural Dimming to dark - LED dimming made beautiful! With any dimmer, in any application. Symbiosis on SOLOdrive stands for unity, for the SOLOdrive working seamlessly together with LED modules, controls and intelligent luminaire elements.

Product offering



SOLOdrive 561/S

Part number (P/N)	SL0561S5
Product description	SOLOdrive AC, 50W, 0-10V, 1 control channel, constant current, 2x 55V output, side feed, square metal

Features & benefits

Natural dimming	Dim to dark, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level
LightShape	Dim to Warm: decrease colour temperature when dimming
Symbiosis	Seamless interoperability with LED modules, controls and in-luminaire intelligent devices
LEDcode	Configurable design to work with most constant current LED modules and arrays, while providing a connection point to integrated peripheral controls
Programmable	Fine-tune your driver for any application
Performance	Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency
Camera compatibility	Hybrid HydraDrive technology is proven to work in TV studios and security camera environments

Project name:	Contact details:
Project number:	
LED driver order number:	

Electrical specifications

Driver type	constant current
Number of LED outputs	2 (UL Class 2)
Maximum LED output power	50W
Programmable LED output current range	150 - 1400mA
LED output type	Programmable in 1mA increments within specified current range
LED output voltage range	1.5 - 55V
Nominal input voltage range AC	120 - 250V (ENEC), 120 - 277V (UL)
Nominal input voltage range DC	120 - 250V
Control protocol	0-10V LEDcode
Control channels	1

Certifications




Warranty

Warranty period	General Terms and Conditions
-----------------	------------------------------

Dimensions, weight, packaging


Length (L)	typical: 130 mm / 5.1 in
Width (W)	typical: 76 mm / 2.99 in
Height (H)	typical: 30 mm / 1.18 in
Weight	350 g

Connector layout


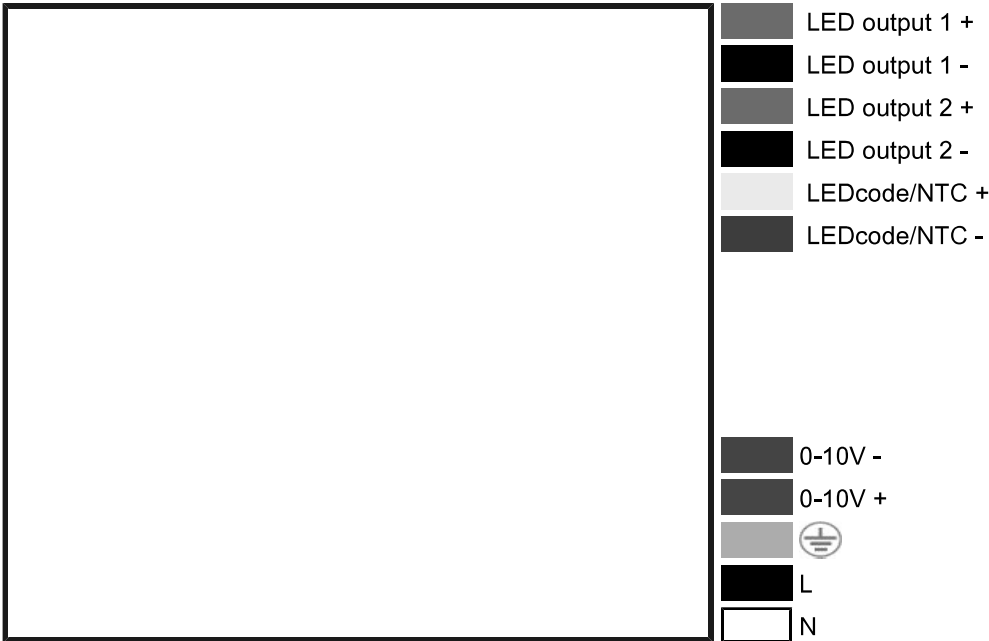


Order number configurator

Standard

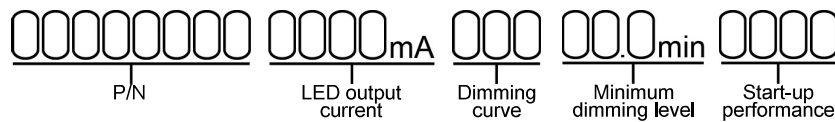

LightShape

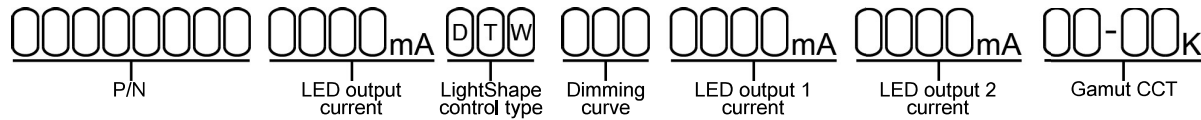

P/N

LED driver part number.

LED output current, Standard

Enter value in 1mA increments, e.g. "811" for 811mA

LED output current, LightShape	Output current identical for all outputs? Enter value in 1mA increments, e.g. "811" for 811mA and leave the fields "LED output 1" and "LED output 2" blank. Output current different per output? Enter "MCUR" in LED output current and specify the differing currents in LED output 1/2.
LightShape control type	"DTW" stands for Dim to Warm
Dimming curve	"LOG" for logarithmic (default) "LIN" for linear "SLN" for soft-linear "SQU" for square
Minimum dimming level	Leave blank for default minimum dimming level of 0.1%. Specify in 0.1% increments, e.g. "10.5" for 10.5%.
Start-up performance	Enter "CA24" for improved start-up performance to comply with ENERGY STAR Luminaires v2.0 and the latest CA Title 24 standard, effective January 2017.
Gamut CCT	LightShape-specific option. Enter the LEDs' CCT as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57 and 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2.
Gamut lumen output	Enter the lumen output range for LED output 1 and 2 as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available range per output: from "01" for 100lm to "99" for 9900lm. E.g. "10-12" for 1000lm on LED output 1 and 1200lm on LED output 2.
Path CCT	Leave blank if Path CCT requires the same values as Gamut CCT. Or specify the Path CCT values as "XXYY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57, 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2.

Europe, Rest of World

eldoLED B.V.
Science Park Eindhoven 5125
5692 ED Son
The Netherlands

E: info@eldoled.com
W: www.eldoled.com

North America

eldoLED America
One Lithonia Way
Conyers, GA 30012
USA

E: info@eldoled.com
W: www.eldoled.com