



BRAND

PureEdge Lighting

DESCRIPTION

Cirrus Ceiling Channel T1 Lens Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 480 inches, features a tubular lens with 176 degree beam, three wattage options, and a spectrum of color temperature options. Chrome finish available up to 84 inch length. Includes a 4.6 inch square canopy that mounts on a standard junction box. Mounting clips (CC-MCL) are included for use every 18 inches. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Note: Required power supply, dimmer control, and optional accessories sold separately.




Shown in: Satin Aluminum / White

SHADE COLOR	White
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 1.125"W x 1.4"H
INTEGRATED LED MODULE	
LAMP	1 x LED/5W/24V LED

Technical Information

LUMINOUS FLUX	335 lumens
LUMENS/WATT	67.00
LAMP COLOR	2700K
COLOR RENDERING	95 CRI
BEAM ANGLE	100°

SPEC # EDG129939

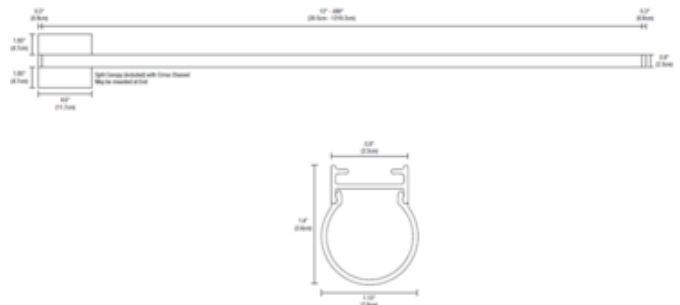

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE