


300W/12V ELECTRONIC REMOTE TRANSFORMER

TRANSFORMER 12V
300W
SINGLE FEED
ELECTRONIC

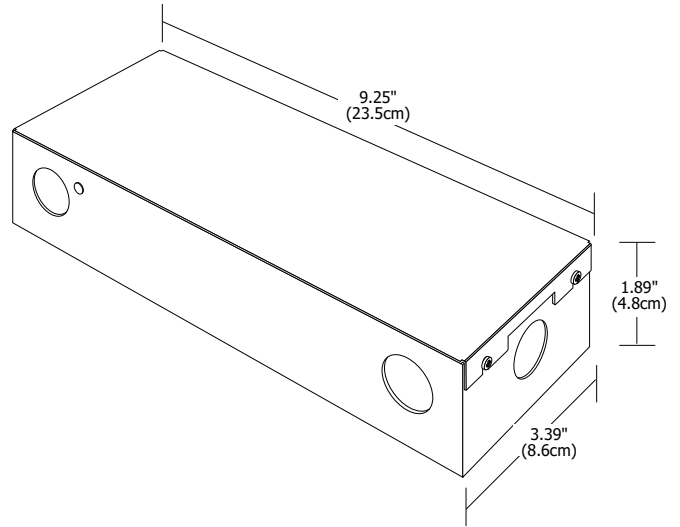

Remote Transformer 300W 12V Electronic

Remote single feed 300 watt electronic transformer converts standard 120 volt line voltage to 300 watt 12 volt output. To be mounted in an accessible location. Consult Low Voltage Wire Size Chart for proper gauge wire to be used between remote transformer and power feed. Power feed or power feed canopy required, sold separately.

Dimming:

With 600 watt low voltage electronic dimmer
*LEDs are not dimmable with this transformer

Mounting Requirements:

Must be in accessible location

Weight:

1.5 lb (.67 kg)

Ordering Code

TEB	-	300	-	12
TEB Transformer Electronic in Box		300 300 Watt		12 12 Volt

LOW VOLTAGE WIRE SIZE CHART

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

12 Volt	5 ft. (1.5m)	6-15 ft. (1.8-4.6m)	16-20 ft. (4.9-6.1m)	21-40 ft. (6.4-12.2m)
300 Watt	#10 GA	#6 GA	#4 GA	#1 GA

Compatible Power Feed Canopies

<input type="checkbox"/>		MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	1 1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	A A 12' (3.7m) Adjustable Cable	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	FE FE Feed End Wall	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	ME ME Adjustable Monorail Feed End	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	-	2SQ 2" Square Canopy J-Box Included	-	1 1 1" (2.5cm)	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP MP Monorail Power Feed	-	2SQ 2" Square Canopy J-Box Included	-	FE FE Feed End Wall	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze

PROJECT:

FIXTURE
TYPE:

DATE:

