



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Cirrus Channel Lensed Wet Location Wall Wash features 7 or 10 watts LED per foot with choice of 2200K, 3500K, 4000K or 5700K, 85+CRI, or 2700K or 3000K color temperature, 95+CRI. 37 lumens per watt/278 lumens per foot. 50,000 hour average lamp life. Available in Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White or Satin Black finish. Custom finishes available. May be ordered in 12 inch increments up to 120 inches. Available in 3, 5, 8 or 10 inch increments upon request. Fixture mounts 24 inches from wall, and includes a split canopy that mounts on a standard junction box. May be ordered with a Slim Profile Channel Junction Box (C-IRE-JBOX), sold separately. Mounting clips (C-MCL) are provided every 18 inches. Cirrus Wall Wash can be powered with a Class 2 power supply up to 40 feet away with a 0-10 volt or electronic low voltage remote power supply. 0-10 volt power supplies include a 24VDC 25, 96, 2X96, 3X96 or 4X96 watt option, dimmable with a 0-10 volt dimmer (tested and approved Philips Sunrise SRI200ZTUNV), sold separately. Electronic low voltage power supplies include a 24VDC 40, 60, 100, 2X100, 3X100 or 4X100 watt option, dimmable with a low voltage electronic dimmer (tested and approved Legrand Adorne ADTP703TU, Lutron DIVA DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600 and Lutron Radio Ra 2). ETL listed. Major components made and assembled in the USA. IP64 rated for covered areas in wet locations. Fixture includes a 5 year warranty. Required power supply, dimmer and optional mounting accessories, sold separately. Product is built to order.





SHADE COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	7W
DIMMER	Dimmable
DIMENSIONS	12"L x 0.9"W x 0.96"H
INTEGRATED LED MODULE	
LAMP	1 x LED/7W/24V LED

Technical Information

LUMINOUS FLUX	278 lumens
LUMENS/WATT	39.71
LAMP COLOR	2700K
COLOR RENDERING	95 CRI

SPEC # EDG134056

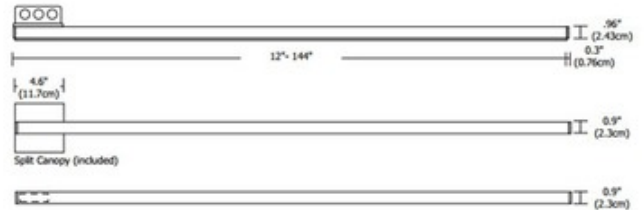

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE