



BRAND PureEdge Lighting


DESCRIPTION

The PSB-25W-010-24VDC Class 2 LED Power Supply accepts input voltage of 120 volts AC and outputs 24 volts DC power up to 25 watts. The power supply can be used as a dimmable or non-dim power supply. Features short circuit and overload protection. Power Input: 120VAC, 50/60Hz. Power Output: Class 2, 24VDC, 1A, 25 watts maximum. For indoor applications only. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location. The low voltage output dims down 7 percent when two additional wires are connected to a 0-10V dimmer. Dimmable with a 0-10V dimmer (tested and approved: Philips Sunrise SR1200ZTUNV), sold separately. ETL listed. 12.4 inch width x 3.12 inch depth x 2.18 inch height.



SHADE COLOR	N/A
BODY FINISH	Black
WATTAGE	25W
DIMMER	0-10V
DIMENSIONS	10"W x 3"H x 6"D
BULB NOT INCLUDED	
LAMP	LED/24V LED

SPEC # EDG160084

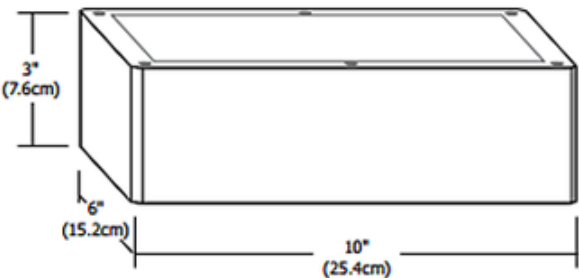

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE