



1126/1102P1
Standard Incandescent



1126/1100 DEEP IC Series
Incandescent Insulated Ceiling



1126/1103R
Lytefiring™ Non-IC
Remodeler Ring

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets								
	LED				Fluorescent				
	Frame-In Kit	Ceiling Type	Lamping	Height	Frame-In Kit	Installation Type	Lamping	Height	
1126 Fresnel Lenslite	1101LED	Non-IC	LED	6 5/8"	1104F13 Series	IC	(1) Triple 13W (GX24q-1)	7 1/2"	
	1100LEDREM	Non-IC Remodeler	LED	6 5/8"					
	L56LED	Non-IC Retrofit	LED	6 5/8"					
						1104F18† Series	IC	(1) Triple 18W (GX24q-2)	7 1/2"
						1100FTU Series	Non-IC	(1) Triple 26/32W (GX24q-3)	6 3/4"
						1100AICMFT	AirSeal® IC	(1) Triple 26/32W (GX24q-3)	6 3/4"
						1910XFH1	Conversion Kit	(1) Quad 13W (GX23-2)	6 3/4"
						1910XDH1	Conversion Kit	(2) Quad 13W (GX23-2)	6 3/4"
						† Use Upper Slot for 18W Triple Tube Lamp. ‡ Use Upper Slot for 26W Triple Tube Lamp			
		1104IC/N	Non-IC	60W A19	7 1/2"				
	1104ICR	Non-IC Remodeler		7 1/2"					

Features

- Reflector:** Hydroformed aluminum, .040 minimum thickness; Anobrite® (anodic-processed) semi-specular finish for permanent reflectivity; matte white trim flange.
- Lens:** Glass Fresnel Lens. Provides efficiency with brightness control. Regressed one inch (1") to minimize brightness at normal viewing angles.
- Lens Bezel:** Spun aluminum, .040" thick. Matte white finish.
- Frame-In Kit:** (1102P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

Retaining Clips: 1955 - For installing in existing ceiling.

Labels

U.L. (Suitable for Wet Locations - Covered Ceiling Only), I.B.E.W.
‡ For 1126: Use Upper Slot for 26W Triple Tube Lamp.

Job Information

Type:

Job Name:


Cat. No.:

Lamp(s):

Notes:


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2009 Philips Group • E0209

Fresnel Lenslite

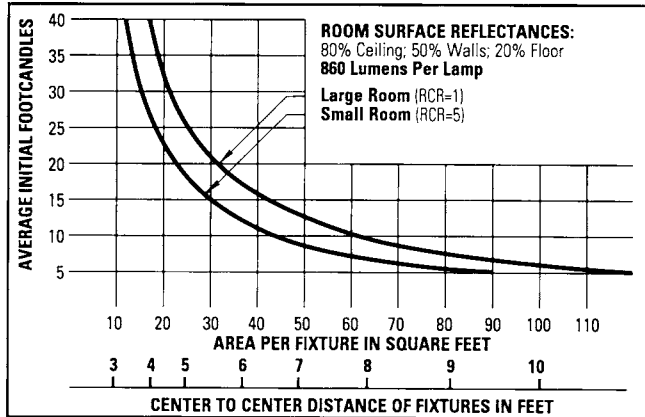


Use quick calculator chart to determine the spacing of 2 Lt. Watt Quad Tube units (1126) for a desired level of illumination. Conversion Factors: 1 Lt. 13W Quad Tube, F.C. x 0.7. 100W A19, F.C. x 1.4.

SPACING RATIO = 1.6

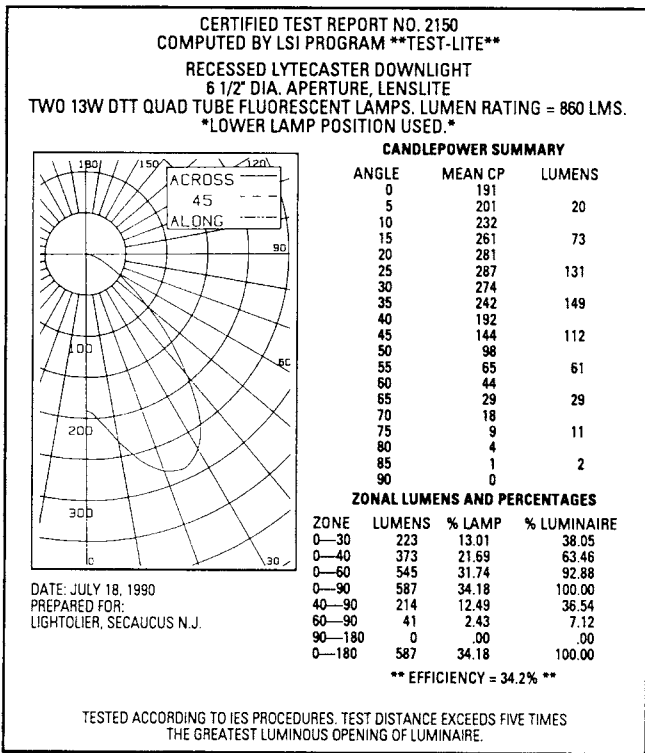


White Diffuser

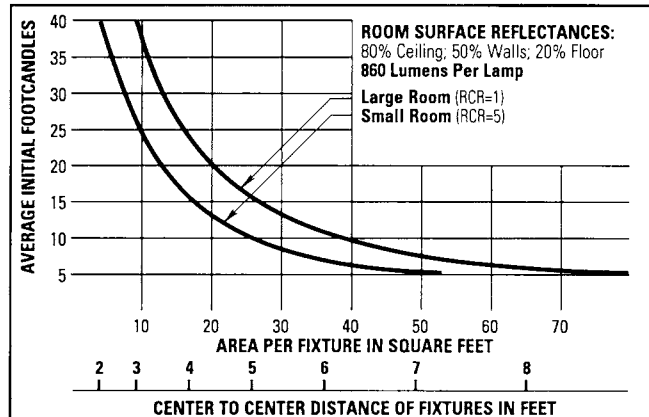

Use quick calculator chart to determine the spacing of 2 Lt. 13Watt Quad Tube units (1128) for a desired level of illumination. Conversion Factors: 1 Lt. 13W Quad Tube, F.C. x 0.8. 100W A19, F.C. x 1.95.

SPACING RATIO = 1.2

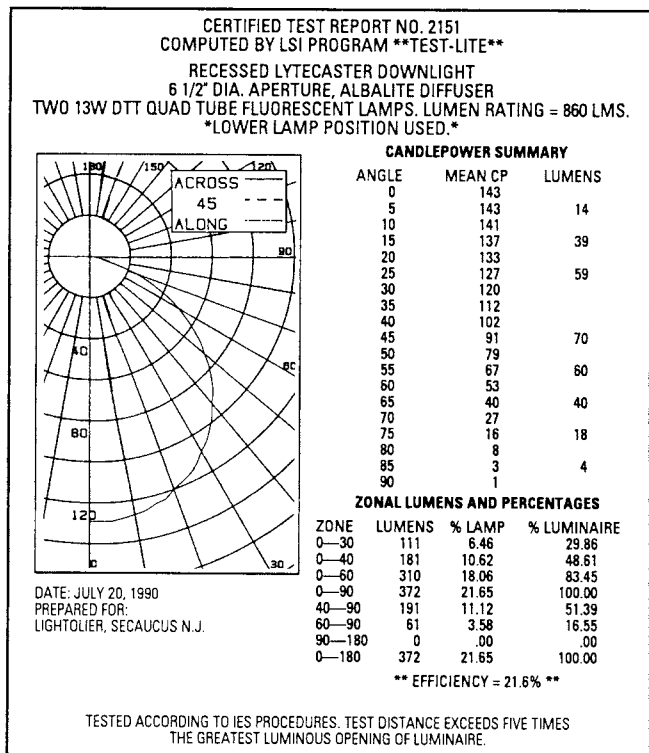

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2009 Philips Group • E0209