



**BRAND**



Contrast Lighting

**DESCRIPTION**

Eco Series LED 3.5 Inch Non-IC Remodel Housing with electronic driver is made of .051 inch thickness galvanized steel construction and features below ceiling accessibility for maintenance. Perfect fit to ceiling with no light leakage. Housing should be at least 3 inches minimum away from insulation. Includes 120 volt power supply driver. Available in 6 watt and 10 watt in 2700K or 3000K color temperature with narrow flood or wide flood beam (to be selected with the trim option). Dimmable at 120 volts with compatible electronic low voltage dimmers that use reverse phase technology (recommended Lutron DIVA DVW-603PH, Lutron Maestro MAELV-600, Lutron Maestro MAW-600H, or Lutron Skylark S-603PR). Installation cutout 3 5/8 inch. Installs in ceilings up to 7/8 inch thick. cUL listed. Compatible trims include ECOL3A Round Adjustable, ECOL3B Square Adjustable, ECOL3C Shower, and ECOL3D Round Regressed. Mounting bars extend from 10 to 24.5 inches. 13.5 inch length x 4.6 inch width x 5.5 inch height. Includes 5 year warranty on LED module and driver.



<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	N/A
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	13.5"L x 4.6"W x 5.5"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	LED/120V LED

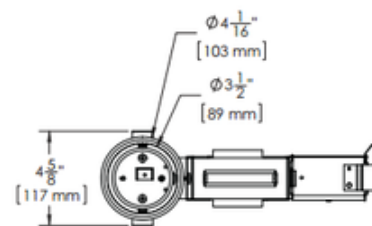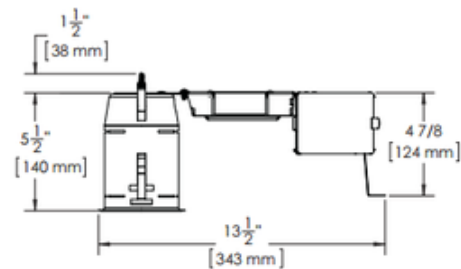

**SPEC #** CLT168112

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE