

# Lightology

lightology.com  
866-954-4489  
06-25-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **BEA188686**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## disco Line Voltage 3IN New Construction Non-IC Housing By Beach Lighting



### Description



R3-G19AT 3 Inch Series Non-IC Airtight New Construction Housing is designed for use in 120 volt line voltage applications. Non-IC rated housing must be kept 3 inch minimum away from insulation. Features steel construction with a low 4.5 inch profile for shallow ceilings. Adjusts up to 1.75 inch ceiling thickness. Accommodates up to a 50 watt, 120 volt GU10 MR16 halogen or 10 watt, 120 volt GU10 MR16 LED bulb, sold separately. Halogen dimmable with a standard incandescent dimmer. See LED bulb manufacturer spec for dimmer compatibility. Ceiling cutout 3.25 inch. A complete fixture consists of a housing and trim, sold separately.

### Specifications

REFLECTOR/BAFFLE COLOR . . . . . N/A  
BODY FINISH . . . . . Galvanized Steel  
WATTAGE . . . . . 50W  
DIMMER . . . . . Dimmable  
DIMENSIONS . . . . . 8"L x 5.5"W x 4.5"H  
BULB NOT INCLUDED . . . . . 1 x MR16/GU10/50W/120V Halogen  
OTHER BULB OPTIONS . . . . . 1 x MR16/GU10/10W/120V LED

### Technical Information

APERTURE SIZE . . . . . 3.000"  
HOUSING HEIGHT . . . . . 5"  
HOUSING TYPE . . . . . New Construction NON IC  
CEILING TYPE . . . . . Drywall with Trim

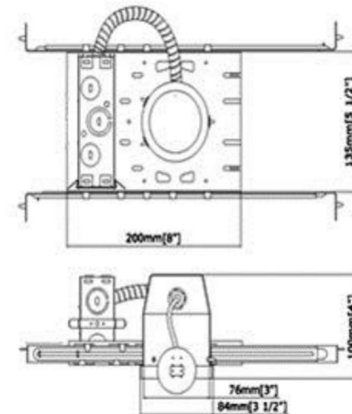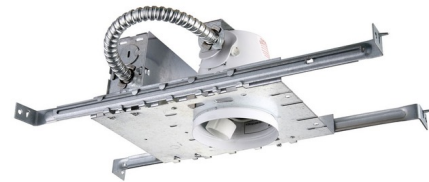

Notes: