

Lightology

lightology.com
866-954-4489
05-24-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **BEA188686**

Approved On: _____ Approved By: _____

disco Line Voltage 3IN New Construction Non-IC Housing By Beach Lighting



Description




R3-G19AT 3 Inch Series Non-IC Airtight New Construction Housing is designed for use in 120 volt line voltage applications. Non-IC rated housing must be kept 3 inch minimum away from insulation. Features steel construction with a low 4.5 inch profile for shallow ceilings. Adjusts up to 1.75 inch ceiling thickness. Accommodates up to a 50 watt, 120 volt GU10 MR16 halogen or 10 watt, 120 volt GU10 MR16 LED bulb, sold separately. Halogen dimmable with a standard incandescent dimmer. See LED bulb manufacturer spec for dimmer compatibility. Ceiling cutout 3.25 inch. A complete fixture consists of a housing and trim, sold separately.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Dimmable
DIMENSIONS	8"L x 5.5"W x 4.5"H
BULB NOT INCLUDED	1 x MR16/GU10/50W/120V Halogen
OTHER BULB OPTIONS	1 x MR16/GU10/10W/120V LED

Technical Information

APERTURE SIZE	3.000"
HOUSING HEIGHT	5"
HOUSING TYPE	New Construction NON IC
CEILING TYPE	Drywall with Trim

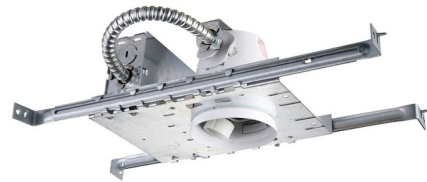

Notes: