



1071/1002P1 Series
Standard Incandescent

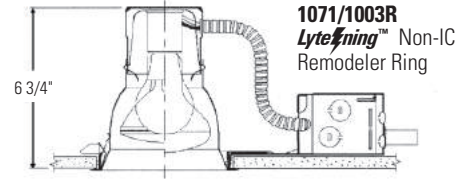

1071/1003R
Lytefining™ Non-IC
Remodeler Ring

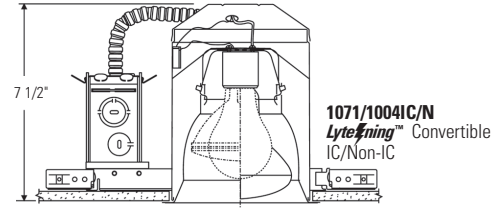

1071/1004IC/N
Lytefining™ Convertible
IC/Non-IC

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets							
	LED				Fluorescent			
1071 Perma White	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Ceiling Type	Lamping	Height
	1001LED	Non-IC	LED	6 3/4"	1001F13U Series	UniFrame™ Non-IC	(1) Triple 13W (GX24q-1)	5 7/8"
	1000LEDREM	Non-IC Remodeler	LED	6 3/4"				
	L56LED	Non-IC Retrofit	LED	6 3/4"				
	Incandescent				1001F18U Series	UniFrame™ Non-IC	(1) Triple 18W (GX24q-2)	5 7/8"
	1000P1	Non-IC	75W A19, PAR30* 65W BR30	6 3/4"	1004F13 Series	IC	(1) Quad/Triple 13W (GX24q-1)	7 1/2"
	1002P1	Non-IC	75W A19, PAR30* 65W BR30	6 3/4"	1004F18** Series	IC	(1) Quad/Triple 18W (GX24q-2)	7 1/2"
	1000P1	Non-IC	75W A19, PAR30* 65W BR30	6 3/4"	1004F26** Series	IC	(1) Quad/Triple 26W (GX24q-2)	7 1/2"
	1002P1	Non-IC	75W A19, PAR30* 65W BR30	6 3/4"	1001F13ICU/N	Performance IC	(1) Triple 13W (GX24q-1)	7 1/4"
	1003R	Non-IC Remodeler	75W A19, PAR30* 85W BR30	6 3/4"	1001F18ICU/N	Performance IC	(1) Triple 18W (GX24q-2)	7 1/4"
	1000IC	IC	40W A19 65W BR30, 75W PAR 30	7 5/16" 7 5/16"	1910XFH1	Conversion Kit	(1) Quad 13W (GX23-2)	6 3/4"
	1000AICM	AirSeal® IC	40W A19 65W BR30, 75W PAR 30	7 5/16" 7 5/16"	**Lightolier recommends the use of triple tube lamps *(Use Socket Extender Accessory With Short Neck)			
	1004ICX/N	AirSeal® IC	52W A19 65W BR30 75W PAR 30	7 1/4"				
	1004IC/N	AirSeal® IC	50W PAR30 65W BR30	7 1/2" 7 1/2" 5 1/2" 5 1/2"				
	1004ICR	IC Remodeler	50W PAR30 65W BR30	7 1/2" 7 1/2" 5 1/2" 5 1/2"				
	1004SIC/N	AirSeal® IC	50W PAR30 65W BR30	7 1/2" 7 1/2" 5 1/2" 5 1/2"				
	1004SICR	IC Remodeler	50W PAR30 65W BR30	7 1/2" 7 1/2" 5 1/2" 5 1/2"				
	1004IC/N	Non-IC	52W A19 75W PAR30 85W BR30	7 1/2" 7 1/2"				
	1004ICR	Non-IC Remodeler	52W A19 75W PAR30 85W BR30	7 1/2" 7 1/2"				
	1004SIC/N	Non-IC	75W PAR30 85W BR30	5 1/2" 5 1/2"				
	1004SICR	Non-IC Remodeler	75W PAR30 85W BR30	5 1/2" 5 1/2"				

Features

- Reflector:** Hydroformed aluminum, .040" thick, (18 ga.); non-yellowing, scratch resistant Perma White Finish, 88% reflectance; white trim flange.
- Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

Medium-Base PAR30 1968 - For use w/short neck PAR30 lamps

Socket Extender:

Spread Lens: L56WWLENS - Proprietary spread lens for use with combination of wall washer optics and LED Frame-In Kits.

Labels

UL (Suitable for Damp Locations); I.B.E.W.

Job Information

Type:


Job Name:

Cat. No.:

Lamp(s):


Notes:

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2011 Genlyte Group LLC • K1111

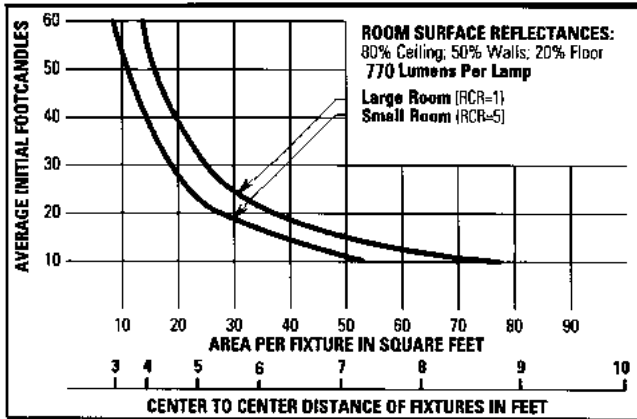

Use quick calculator chart to determine the spacing of 100 Watt BR30 FL units for a desired level of illumination. Conversion Factor: 75W A19, F.C. x 0.85. 1 Lt 13W Quad Tube, F.C. x 0.6.

Spacing Ratio = 0.9

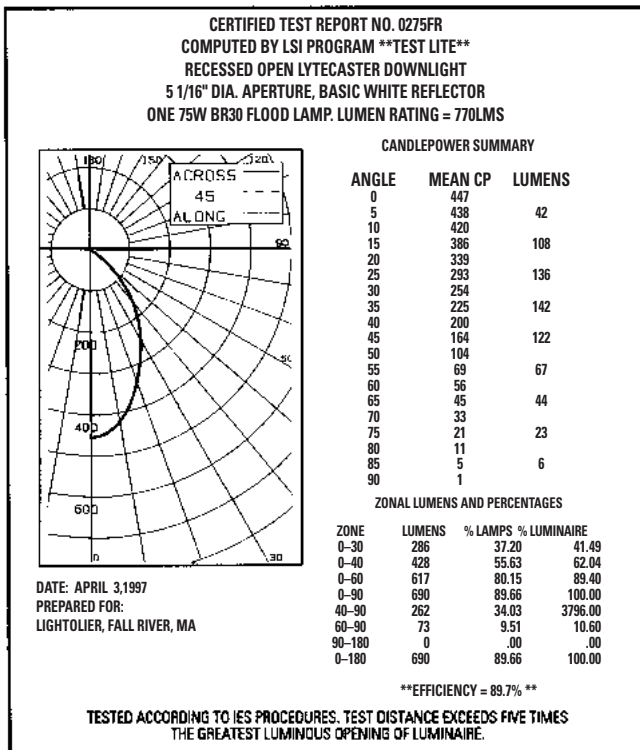

Coefficients of Utilization

ROOM CAVITY RATIO	% WALL REFLECTANCE															
	80			70			50			30			10			
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
1	.97	.94	.92	.95	.93	.90	.91	.89	.88	.88	.89	.85	.85	.84	.82	.81
2	.88	.84	.80	.87	.83	.79	.84	.80	.77	.81	.78	.76	.79	.76	.74	.73
3	.80	.75	.71	.79	.74	.70	.77	.72	.69	.74	.71	.68	.72	.69	.67	.65
4	.74	.68	.63	.73	.67	.63	.71	.66	.62	.69	.65	.61	.67	.63	.61	.59
5	.68	.61	.56	.67	.61	.56	.65	.60	.56	.63	.59	.55	.62	.58	.55	.53
6	.62	.56	.51	.61	.55	.51	.60	.54	.50	.58	.54	.50	.57	.53	.50	.48
7	.57	.50	.46	.56	.50	.46	.55	.49	.45	.54	.49	.45	.53	.48	.45	.43
8	.52	.46	.42	.52	.46	.41	.51	.45	.41	.50	.45	.41	.49	.44	.41	.39
9	.48	.41	.37	.48	.42	.37	.47	.41	.37	.46	.41	.37	.44	.40	.37	.35
10	.45	.38	.34	.44	.38	.34	.43	.38	.34	.43	.37	.34	.42	.37	.34	.32

20% FLOOR CAVITY REFLECTANCE

Conversion Factor: 75W A19, C.U. x 0.5. 1 Lt. 13W Quad Tube, C.U. x 0.5.

To convert lighting data for a lower wattage incandescent lamp of the same type, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

Job Information Type:

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2011 Genlyte Group LLC • K1111