

# LOW-VOLTAGE PENDANTS

## Fab Pendant

### DESCRIPTION

Cylinder shaped shade, constructed of Indian silk with hand-rolled edges. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAA® module and six feet of field-cutttable suspension cable. Works with SORAA.

### INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T-TRAK, order FreeJack version and T-TRAK FreeJack Connector (sold separately).

### ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

### WEIGHT

0.45lb / 0.2kg ±

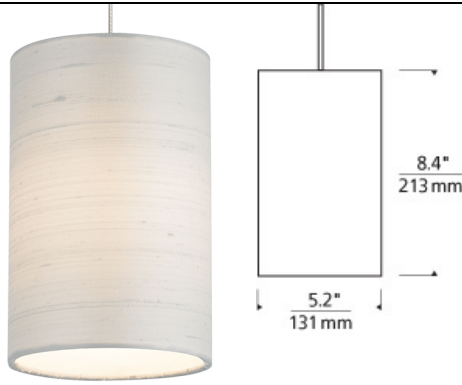

almond



almond



white

### ORDERING INFORMATION

700	SYSTEM	FAB	COLOR	FINISH	LAMP
FJ	FREEJACK		A ALMOND	Z ANTIQUE BRONZE	12 VOLT HALOGEN
KL	KABLE LITE		W WHITE	C CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MP	MONOPOINT			S SATIN NICKEL	-24 24 VOLT HALOGEN
MO	MONORAIL				
MO2	TWO-CIRCUIT MONORAIL				

Note: Note: MP includes 4" Round Flush Canopy.

Antique Bronze is not available for Kable Lite.

When installing LED option on MO2 only magnetic transformers may be used.



**TECH LIGHTING®**  
 7400 Linder Avenue      T 847.410.4400  
 Skokie, Illinois 60077      F 847.410.4500

**Tech Lighting, L.L.C.**

700 \_\_\_\_ FAB \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_