

Lightology

lightology.com
866-954-4489
07-29-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **LTL19058**
Approved On: _____ Approved By: _____


Lytecaster 1100FTUES EM 6.75 In Non-IC Frame-In Kit 120V

By Lightolier by Signify



Description

Lytecaster 1100FTUESEM 6.75 Inch Compact Fluorescent Frame-In Kit with Emergency Ballast is made of galvanized steel. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from fixture sides and wiring compartment and must not be placed above fixture in a manner which will entrap heat. Accommodates all ceilings up to 1 inch thick. Breakout section and anchor nails for existing ceilings. Push-in/twist-out rotoclips hold reflector flush to ceiling. UL listed for maximum of eight No. 12 gauge 75 degree C through branch circuit conductors. Mounting bars extend 13 to 27 inch, rotatable and lockable, with integral T-bar clips. Attaches to wood joist or T-bar ceilings without need of accessories. 120 volt electronic ballast. Includes 90 minute battery backup, complete with an LED charging indicator light and integrated test switch. UL listed. Energy Star. Suitable for damp locations. Dimensions: 15.2 inch width x 11.75 inch depth. Overall height of fixture dependent on reflector kit. Requires compact fluorescent 26/32 watt triple tube lamp per attached manufacturer spec. A complete fixture consists of a frame-in kit and trim kit, sold separately.

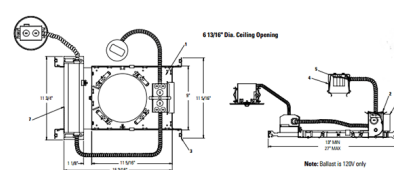

Specifications

REFLECTOR/BAFFLE COLOR N/A
BODY FINISH Galvanized Steel
WATTAGE 32W
DIMMER Not Dimmable
DIMENSIONS 15.2"W x 11.75"D
BULB NOT INCLUDED 1 x T4/GX24q-3/32W/120V Compact Fluorescent

Technical Information

HOUSING HEIGHT 4"
HOUSING TYPE New Construction NON IC
CEILING TYPE Drywall with Trim

Notes: