



BRAND

Lightolier by Signify

DESCRIPTION


Lytecaster 1102T13U 2 X 13 Watt 6.75 Inch 120/277 Volt Compact Fluorescent Non-Insulated Ceiling New Construction Frame-In Kit is made of galvanized steel. Accommodates ceilings up to 1 inch thick. Includes single 2-lamp HPF univerval voltage electronic non-dimmable ballast for use with two 13 watt quad tube compact fluorescent lamps. Input wattage: 33 watts. Input Current: .28/12A. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from fixture sides and wiring compartment and must not be placed above fixture as to entrap heat. Push-in/twist-out rotoclips hold reflector flush to ceiling. Quick release L shaped cover for access to wiring. Includes 13 to 27 inch mounting bars permitting off-center mounting. Bars rotate 90 degrees and lock in both directions. UL listed. Suitable for damp locations. Compact fluorescent lamping type and wattage dependent on trim and frame-in kit combination per attached manufacturer spec. A complete fixture consists of a frame-in kit and trim kit, sold separately.



TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	26W
DIMMER	Not Dimmable
DIMENSIONS	15.7"W x 3.9"H x 9"D
BULB NOT INCLUDED	
LAMP	2 x T4/G24q-1/13W/120V Compact Fluorescent

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	4"

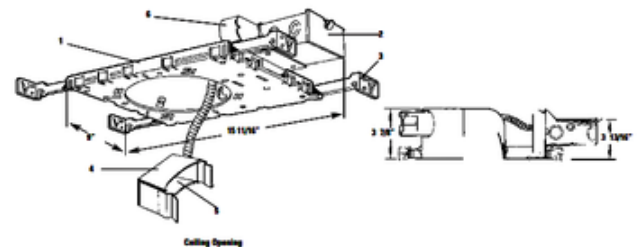

SPEC # LTL19064

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE