



BRAND

Lightolier by Signify

DESCRIPTION

Lytecaster 1102TH1 6.75 Inch 120 Volt Compact Fluorescent Non-Insulated Ceiling Frame-In Kit is made of galvanized steel. Accommodates ceiling up to 1 inch thick. Includes single 2-lamp HPF magnetic non-dimmable ballast for use with two 13 watt compact fluorescent lamps. Input wattage: 32 watts. Input Current: .280A. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from fixture sides and wiring compartment and must not be placed above fixture as to entrap heat. Push-in/twist-out rotoclips hold reflector flush to ceiling. UL listed for maximum of eight No. 12 gauge 90 degree C through branch circuit wires, 75 degree C for end of run. Quick release L shaped cover for access to wiring. Mounting bars extend 13 to 27 inches, permitting off-center mounting. Bars rotate 90 degrees and lock in both directions. Features integral nailer for wood joists and locking tabs for T-bar runners. UL listed. Suitable for damp locations. Dimensions: 15.7 inch width x 9 inch depth x 3.9 inch height. Compact fluorescent lamping type and wattage dependent on trim and frame-in kit combination per attached manufacturer spec. A complete fixture consists of a frame-in kit and trim kit, sold separately. Available in 277 Volt version upon request.




TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	26W
DIMMER	Not Dimmable
DIMENSIONS	15.7"W x 3.9"H x 9"D
BULB NOT INCLUDED	
LAMP	2 x T4/GX23/13W/120V Compact Fluorescent

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	4"

SPEC #	LTL19067
--------	----------

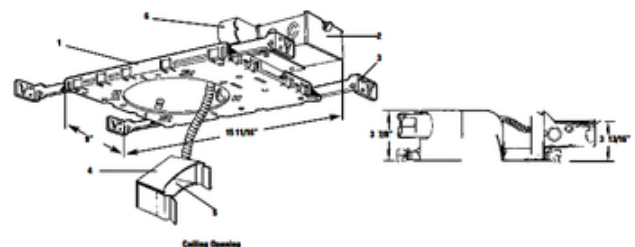

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE