



BRAND Lightolier by Signify

DESCRIPTION

Lytecaster Lightening 6 3/4 inch EnergyStar 1 Lt 18W Quad/Triple Tube Compact Fluorescent IC Frame-In Kit in grey steel features integral self-tapping phillips screws or nails for secure attachment to wood or metal construction and is UL listed for direct contact with thermal insulation. Allows installation in ceilings up to 2 inch thick. Can be removed for access to junction box, ballast and ceiling plenum. AirSeal housing minimizes air leakage to less than 2 CFM. Mounting frame lock into position along length of mounting bars with locking spring and bendable slot. (3) slots 90 apart simplify alignment. Mounting bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16 inch to 24 inch O.C. joist spacing. Attaches to T-bar ceilings without the need of accessories. Electronic ballast, 120V, end of life protected. For use with 4 Pin, GX24q-1 lamps. Lamp not included. 13W x 10.75




TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	18W
DIMMER	Not Dimmable
DIMENSIONS	10.75"W x 7.5"H x 7.5"D
BULB NOT INCLUDED	
LAMP	1 x T4/GX24q-2/18W/120V Compact Fluorescent

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC
HOUSING HEIGHT	8"

SPEC # LTL19080

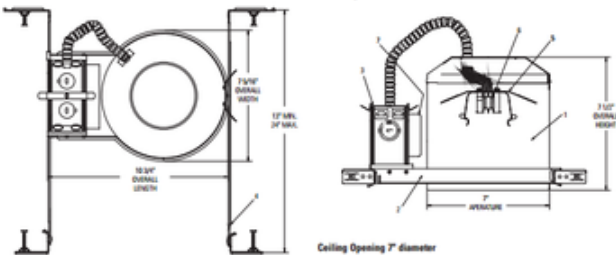

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE