



BRAND Lightolier by Signify

DESCRIPTION

Lytecaster Lightening 6 3/4 inch AirSeal Convertible (IC/Non-IC) inch Incandescent Frame-In Kit in matte white with aluminum with nails is for use in insulated or non-insulated ceilings. AirSeal for restricted air leakage, complies with the MEC and WSEC energy codes. Mounting frame Locks into position along length of mounting bars with locking spring and bendable slot. (3) slots 90 apart simplify alignment. 2X 4 X 3 1/2 junction box is UL listed for maximum of 8 (#12 ga.) through branch circuit conductors. Integral cable clamps permit attachment of non-metallic (#12 or #14 ga.) romex cable without tools or additional connectors. Mounting bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16 to 24 O.C. joist spacing. Medium base socket. Lamp not included. 7.3125W X 13L




TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	150W
DIMMER	Standard 120V
DIMENSIONS	13.1"L x 6.9"W x 7.5"H
BULB NOT INCLUDED	
LAMP	1 x PAR38/Medium (E26)/150W/120V Halogen 1 x PAR38/Medium (E26)/120V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	8"

SPEC # LTL19089

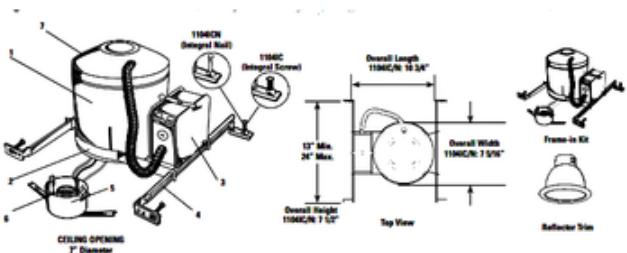

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE