




BRAND Lightolier by Signify

DESCRIPTION

Calculite 6 Commercial compact fluorescent frame-in kit with dimming option features a die-cast aluminum cup to dissipates heat and position lamp holder. Electronic 120V - 277V ballast UL listed for through branch circuit wiring with max of 8, 12 AWG, 90c supply conductors. Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools. Dimming ballast is Advance Mark VII 1, 120-277, quad / triple tube 4-Pin, 100 -5% dimming. Trim sold separately, required for a complete fixture. For use with 24q-3, 26W or 32W lamps, not included. 12.75W x 9.875H x 12.125L.

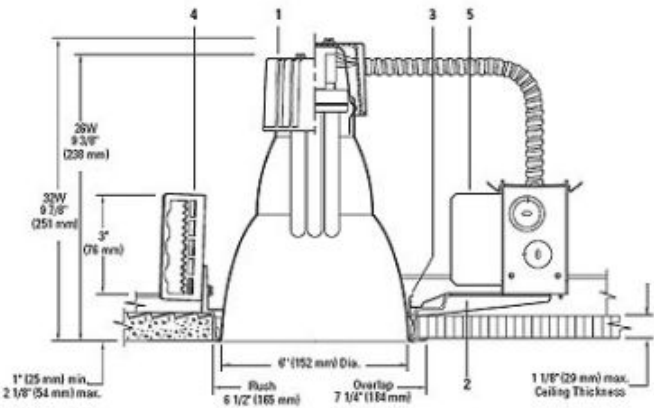

TRIM COLOR	Grey
BODY FINISH	Galvanized Steel
WATTAGE	26W
DIMMER	Fluorescent
DIMENSIONS	12.125"L x 12.75"W x 9.875"H
BULB NOT INCLUDED	
LAMP	1 x T4/GX24q-3/26W/120V Compact Fluorescent
Technical Information	
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
APERTURE SHAPE	Round
SPEC #	LTL19361

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE