




BRAND PureEdge Lighting

DESCRIPTION

Recessed In Wall 600 watt Dual Feed Transformer converts 120 volt input to two 300 watt, 12 volt outputs and must be used with a dual power feed canopy, sold separately. Can be recessed in the wall or surface mounted. To prevent voltage drop it is best to keep the transformer within 20 feet of the power canopy/junction box. 12 volt lamp must be used. A 1000 watt low voltage magnetic dimmer must be used when dimming is desired, sold separately, and is powered by the 120 volt side of the dimmer. Requires a dual feed power canopy, sold separately.



SHADE COLOR	N/A
BODY FINISH	White
WATTAGE	600W
DIMMER	Low Voltage Magnetic
DIMENSIONS	16"W x 10"H
BULB NOT INCLUDED	
LAMP	600W Halogen
SPEC #	EDG101390

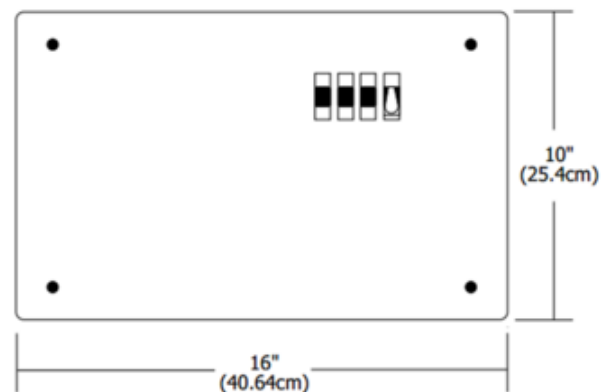

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE