




BRAND Lightolier by Signify

DESCRIPTION

The Radius 1-Circuit Plain Track is a one circuit electrical distribution system designed to support and supply all Lytespan lighting units. Available in Matte White, Matte Black or Raw Aluminum finish. The track is available in 2, 4, 6 and 8 foot lengths. The track lengths may be combined with various electrical fittings to create straight runs or patterns. The track may be field cut at any location. The track may be surface mounted to a ceiling or wall, stem mounted, or mounted to a grid ceiling with flat or regressed panels. The track is not intended to be cable mounted. Toggle bolts and nylon insulators are furnished with the track (2 per 2 foot, 4 foot and 6 foot, 3 per 8 foot). Dead end cap included with each length of track and saddle canopy. Capacity is 20 amps at 120 volt 60Hz per branch circuit (2400 watts max per branch circuit). UL listed.



SHADE COLOR	N/A
BODY FINISH	Matte White
WATTAGE	N/A
DIMMER	N/A
DIMENSIONS	96"L x 1.4"W x 0.5"H
LAMP	N/A
SPEC #	LTL20008

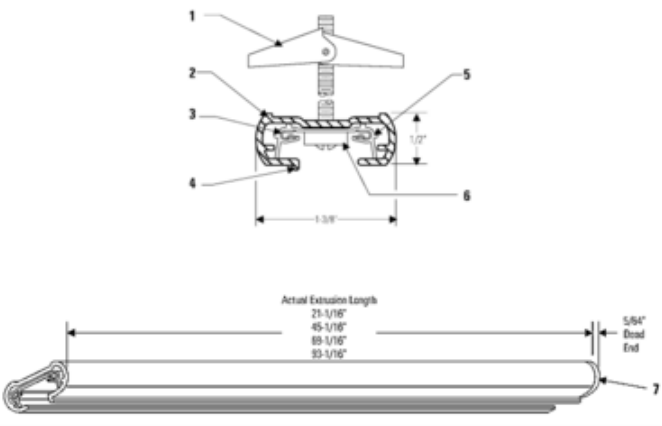

1. Toggle Bolts and Screws: furnished with track units.
2. Radius Track: .062" wall thickness. Aluminum extrusion.
3. Conductors: 20 amp. capacity. "U" shape provides reliable contact with connectors.
4. Polarity Bead: identifies the neutral conductor.
5. Insulated liner: .032" wall high temperature extruded thermoplastic.
6. Insulated Washer: (Furnished with Track) Insulates mounting screw from conductors.
7. Dead End Cap: molded thermoplastic.

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE