


ASSEMBLY & INSTALLATION INSTRUCTIONS

A986

Veneto 5 Light Linear 401319

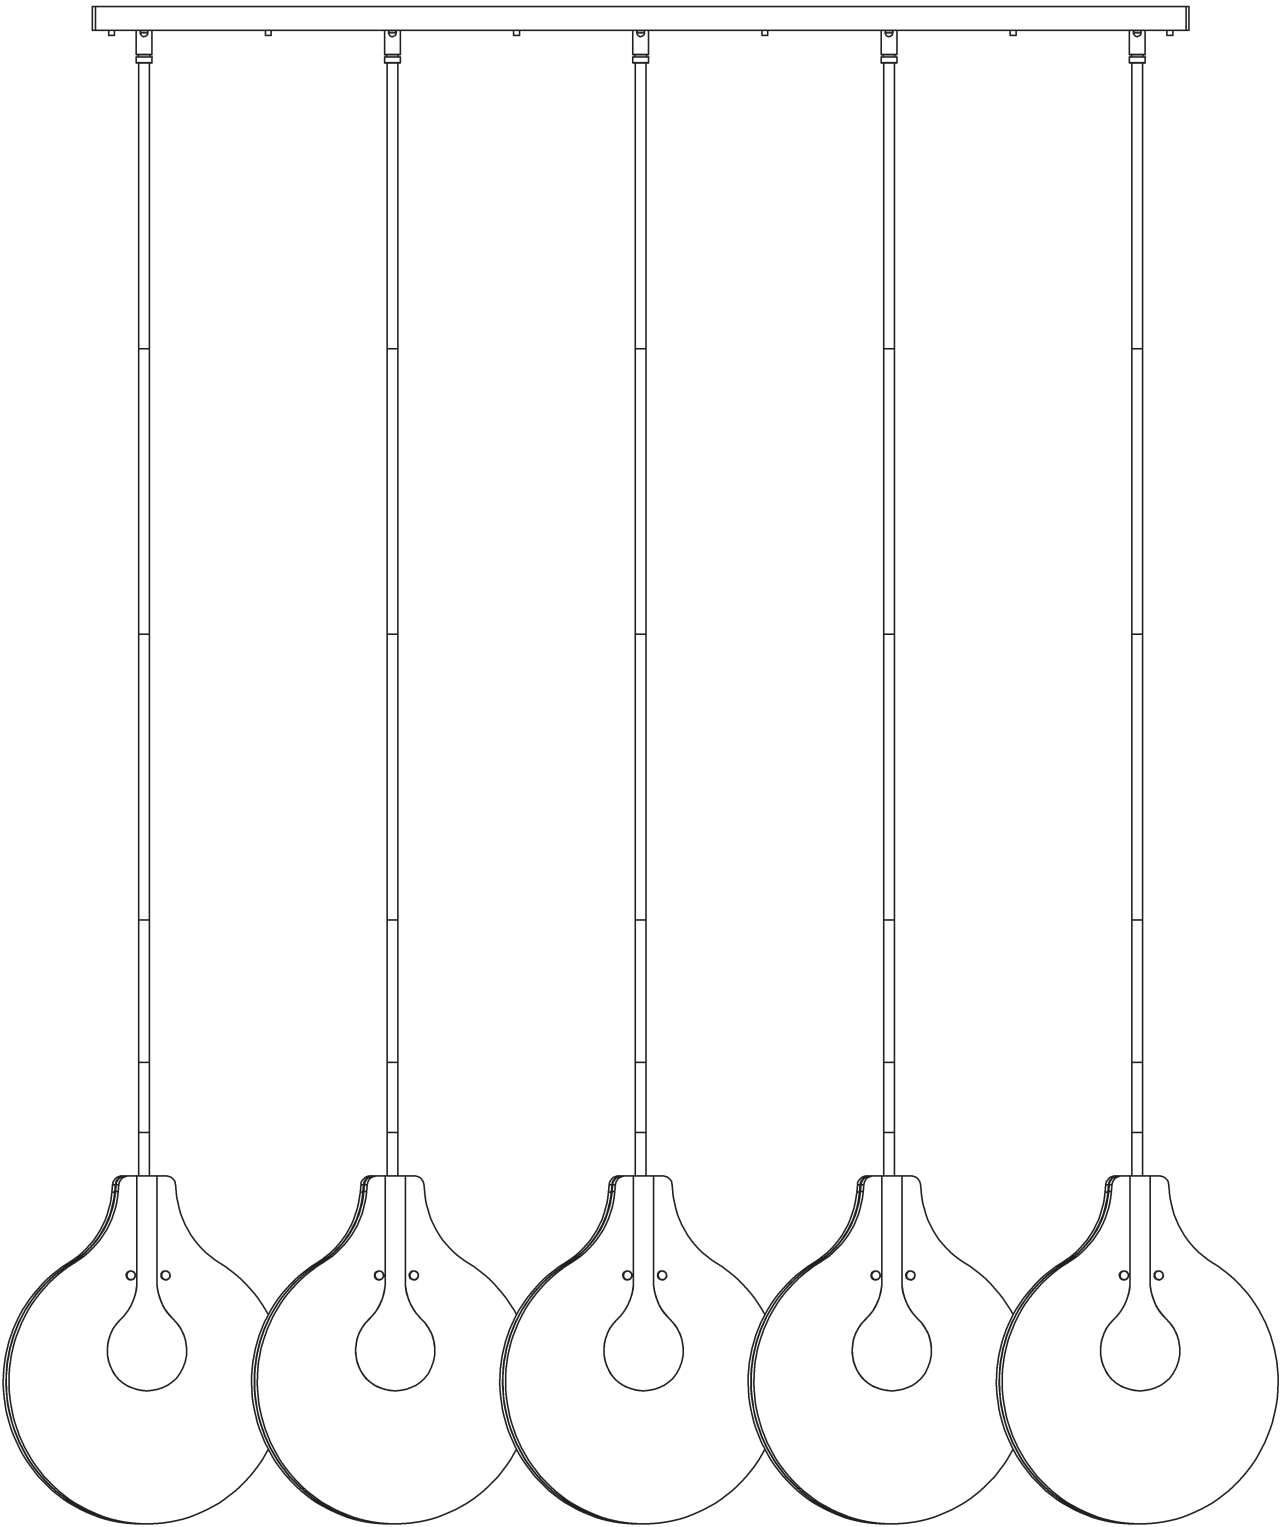

Component Parts

- A Fixture (5)**
- B Canopy**
- C Standoffs (6)**
- D Hex Nuts (7)**
- E Canopy Plate**
- F Swivel (5)**
- G Canopy Studs (6)**
- H 3" Fixture Pipe (5)**
- I 6" Fixture Pipe (5)**
- J 12" Fixture Pipe (15)**
- K Stem Couplings (30)**
- L Knobs (6)**
- M Glass (10)**
- N Lock Washer (5)**
- O Knurled Ball (20)**
- P Bulb, not included (5)**
- Q Socket (5)**
- R Glass Studs (10)**
- S Safety Cable**



ASSEMBLY & INSTALLATION INSTRUCTIONS

A986

Veneto 5 Light Linear 401319

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

To Install Canopy (Figure 1) on following page

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack fixtures (A) from the carton.
2. Remove knobs (L) from canopy studs (G) to allow for removal of canopy plate (E). Retain parts for later use.
3. Center canopy (B) over the electrical box. Be sure to line up oval slots in bracket with mounting holes in electrical box.

CAUTION: Due to weight of fixture, be sure at least two machine screws attach canopy (B) to a structural member in the ceiling. Be aware that different materials and/or construction methods may require different fasteners. If in doubt, contact a qualified electrician.


Caution: Fixture must be attached to a structural member in the ceiling.

4. Thread the wires in the electrical box through the hole in canopy (B) while moving canopy (B) into position. Using two machine screws (not provided) fasten canopy (B) to the electric box.
5. Using suitable wire connectors (not provided) connect transformer wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green) together.

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

6. Follow instructions on following page to install fixture.

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

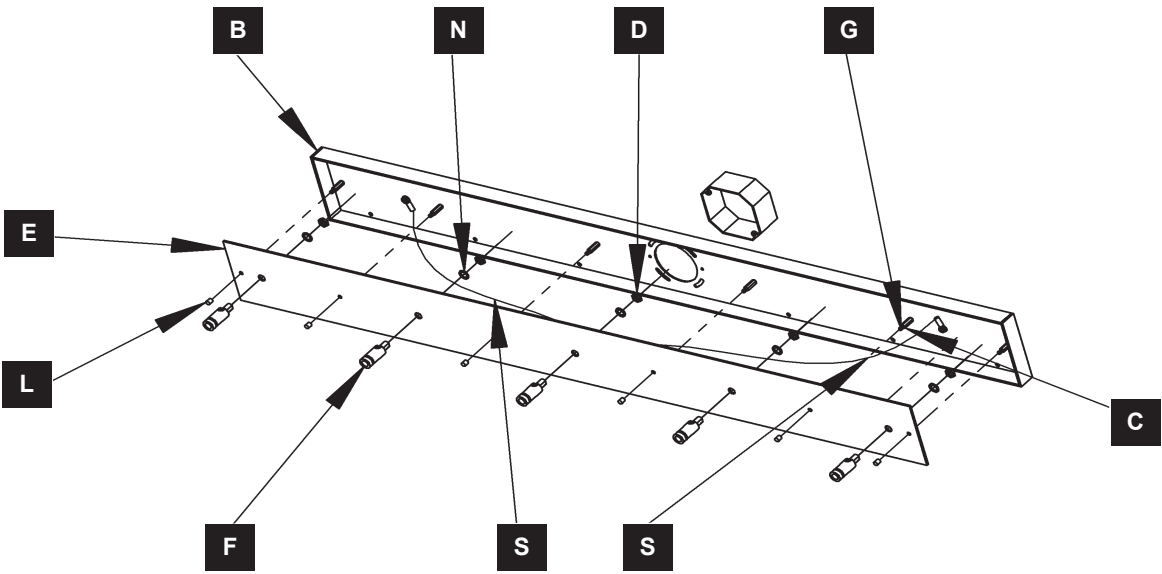

(Figure 1)

To Install Fixture (Figure 2) on following page

- 1. Carefully unpack fixture from the carton.
- 2. Locate fixture pipes (H,I,J), fixture (A), stem coupling (K). Stem couplings (K) can be found in the kit bag.
- 3. Provided are multiple fixture pipes in three different lengths. Choose the combination that will achieve the overall height desired. Refer to the table below to determine the pipes required to reach the desired overall height. Once you have determined the components necessary, feed the wires that exit fixture (A) through the individual components and thread pipes and couplings together. Wires will slip easier through loose components than through pipes and couplings that are pre-assembled. Once wires are run, apply thread locking compound to all the connection points and assemble the pipes and nipples.

		Overall Height of Fixture														
		21.8	24.8	27.8	30.8	33.8	36.8	39.8	42.8	45.8	48.8	51.8	54.8	57.8	60.8	63.8
# of Pipes Required	3" Pipe (H)	1		1		1		1		1		1		1		1
	6" Pipe (I)		1	1			1	1			1	1			1	1
	12" Pipe (J)				1	1	1	1	2	2	2	2	3	3	3	3

NOTE: APPLICATION OF THE THREAD LOCKING COMPOUND IS NECESSARY TO PREVENT THE PIPE FROM LOOSENING DURING REGULAR MAINTENANCE AND CLEANING OF THE FIXTURE. BE CERTAIN TO APPLY THE COMPOUND.

- 4. Slip wires from fixture (A) through assembled swivel (F) and thread swivel into fixture pipe.
- 5. Repeat repeat steps 3 & 4 for each fixture (A) and ensure that slots on swivels (F) are aligned as shown in figure 2.
- 6. Follow instructions on following page to continue install.
- 7. Carefully place canopy plate (E) over swivels (F) and secure with washers (N) and hex nuts (D) as shown. Washer (N) and hex nut (D) can be found in the kit bag.

ASSEMBLY & INSTALLATION INSTRUCTIONS

A986

Veneto 5 Light Linear 401319

8. Raise canopy plate (E). Connect safety cable (S) from canopy (B) to canopy plate (E) using hex nuts threaded onto canopy plate (E).


Note: Safety cable (S) is used to temporarily suspend canopy (B) while wiring connections are made.

9. Using suitable wire connectors (not provided) connect fixture wires to supply (white/ribbed to white and black/smooth to black). Connect all ground wires (bare copper or green to bare copper or green).
10. Thread knobs (L) onto canopy studs (G) to secure canopy plate (E) to canopy (B).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

11. Refer to instructions on next page to Install Glass.

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN CANOPY (H) AND THE CEILING.

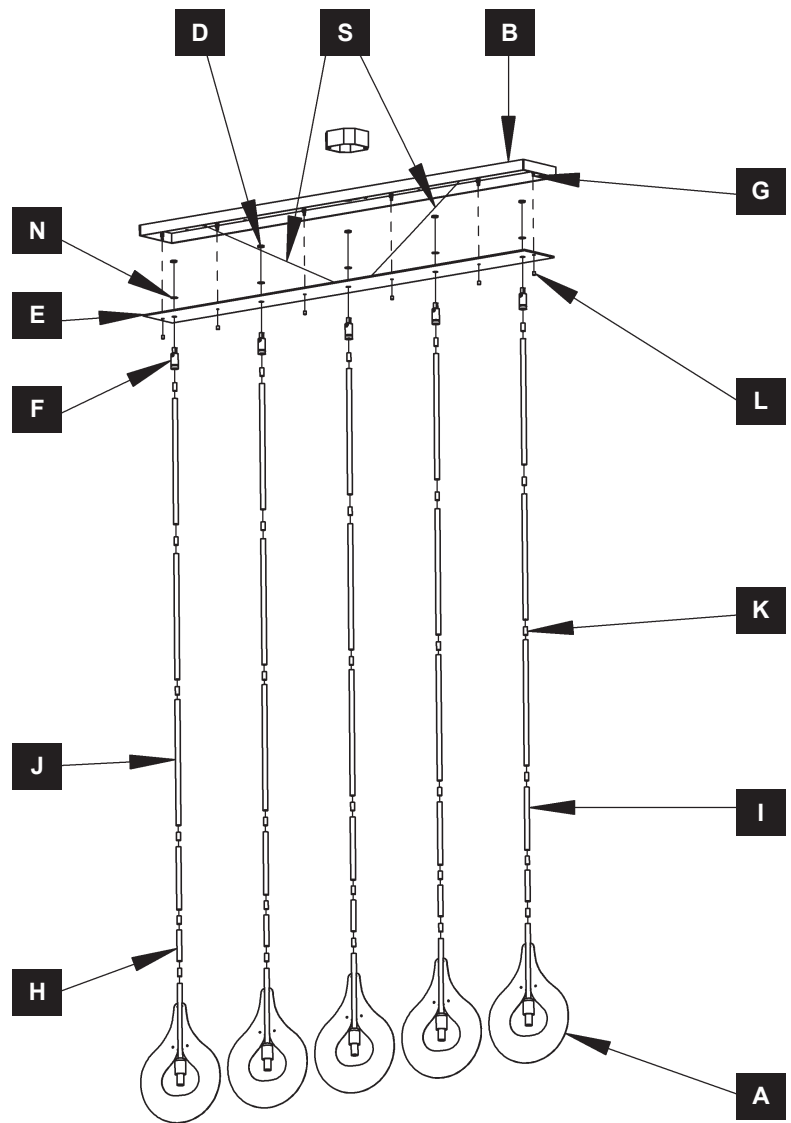

(Figure 2)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

55876


5 OF 6

To Install Glass (Figure 3)

1. Install bulb (P), not included, into socket (Q).
2. Thread two glass studs (R) into fixture (A).

Note: The thickness of the glass can vary. 2 different lengths of glass studs (R) are provided. Clear cushioning washers are also provided to help with securing glass (M). Clear washers should be placed between glass and knurled balls.

3. Locate and slide glass (M) onto studs (R). Secure with knurled balls (O) by threading them onto studs (R).
4. Repeat for remaining fixtures (A).
5. Restore electricity at main breaker.

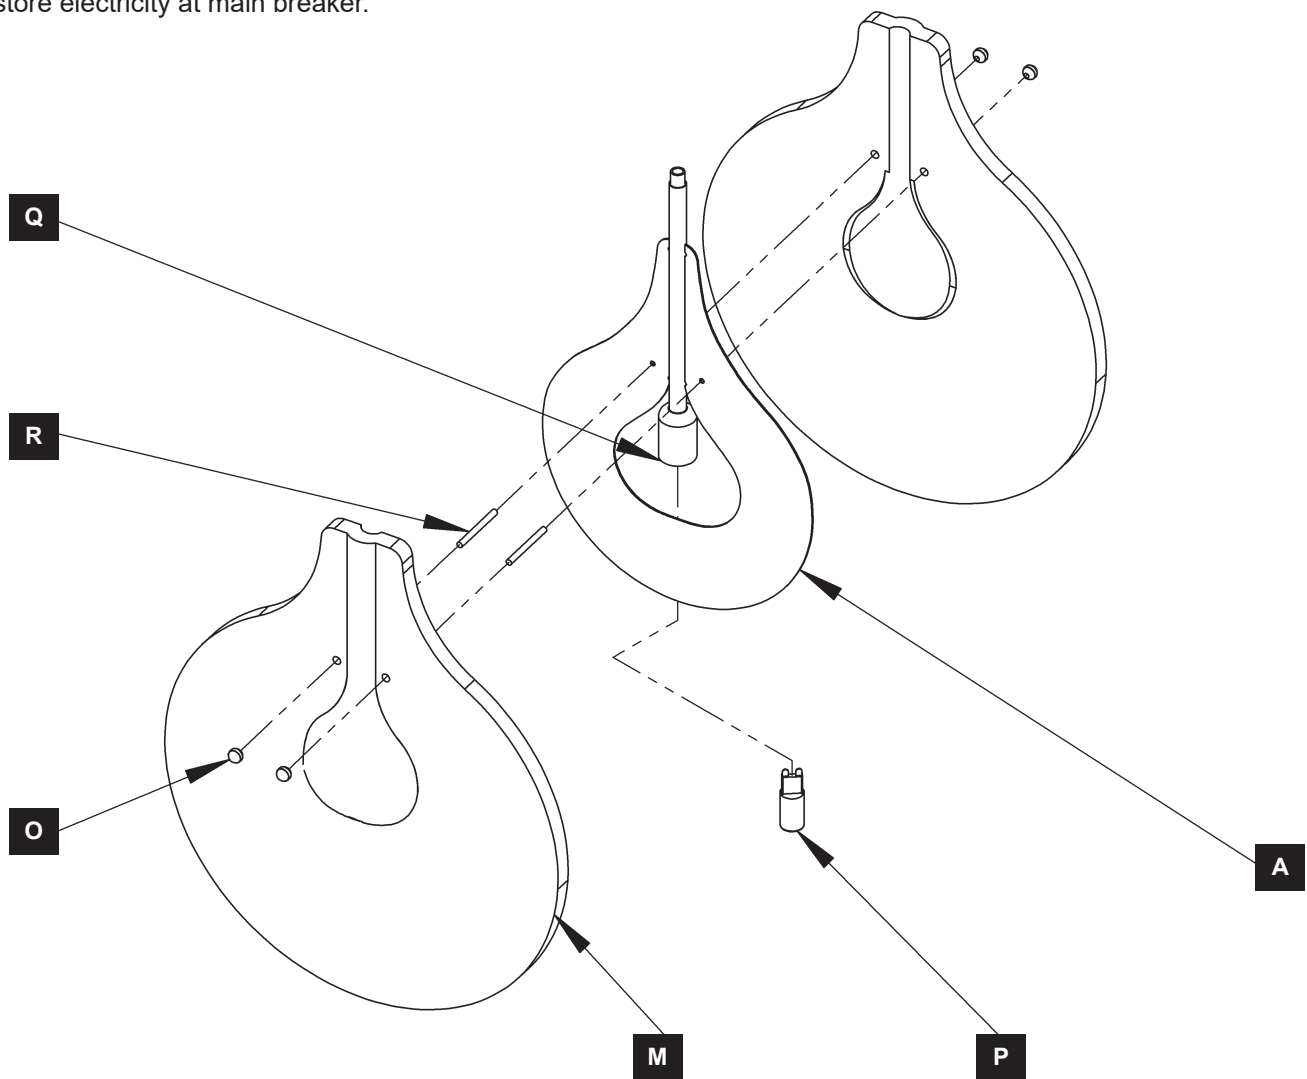

(Figure 3)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.*