

CIELO MEDIUM, LARGE & EXTRA-LARGE CHANDELIERS


CC1791; CC1801; CC1811

General Product Information



ETL
LISTED
Intertek

SAVE THESE INSTRUCTIONS!




TWO-PERSON
INSTALLATION
RECOMMENDED



INDOOR



DAMP LOCATION
SAFE



NEC COMPLIANT
JUNCTION BOX



INTEGRATED LED
NO BULBS REQUIRED



DIMMABLE
(LED, ELV, TRIAC & 10V)



PLEASE SEE
visualcomfort.com
FOR PRODUCT
SPECS




CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



MEASURING TAPE



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.





Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

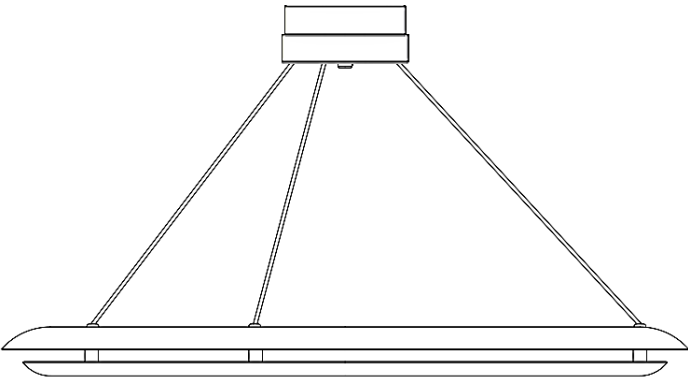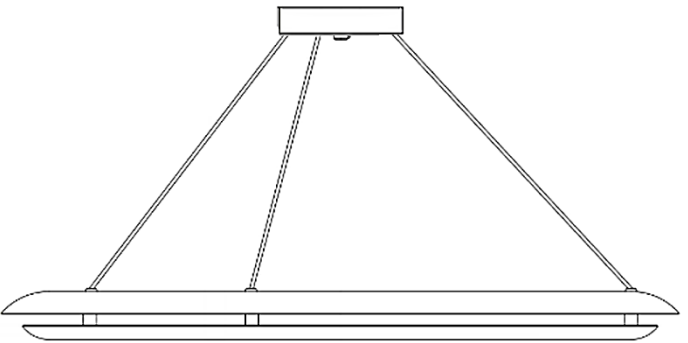

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate (Illustration 1 Only)
- E. Mounting Bracket (Illustration 2 Only)
- F. Mounting Screws
- G. Set Screws
- H. Cable Grip
- I. Driver Cover (Illustration 2 Only)
- J. Canopy
- K. Cap Nut
- L. Fixture Cables
- M. Fixture

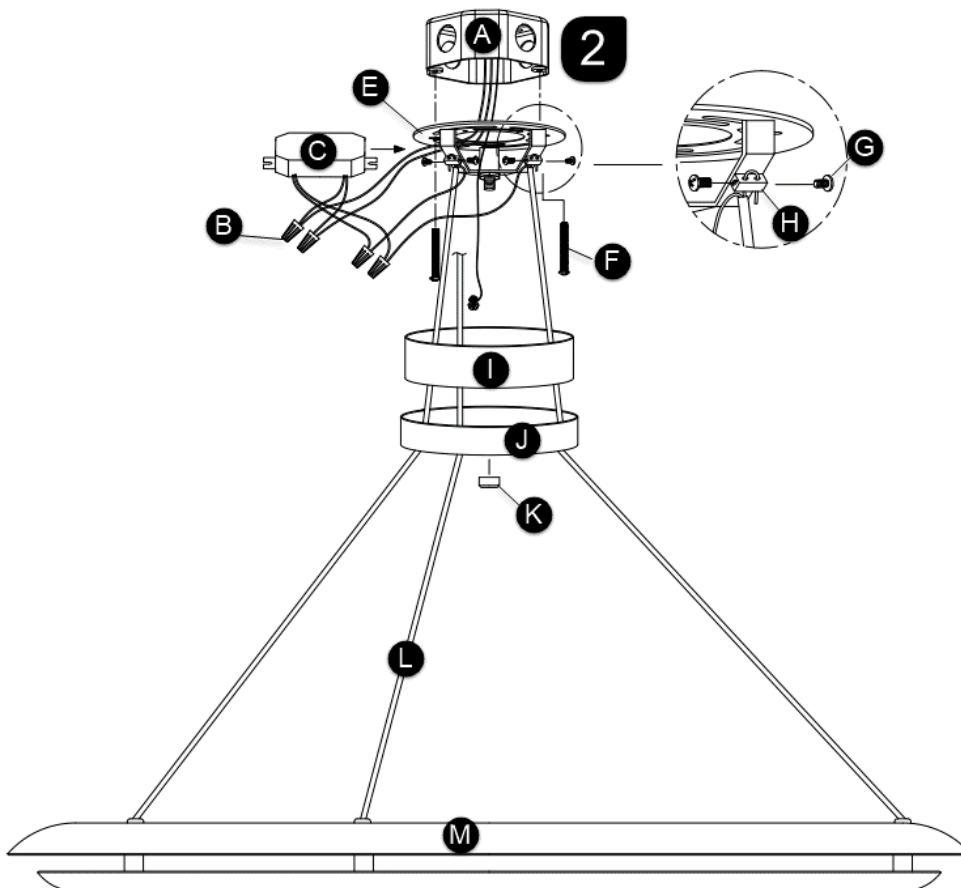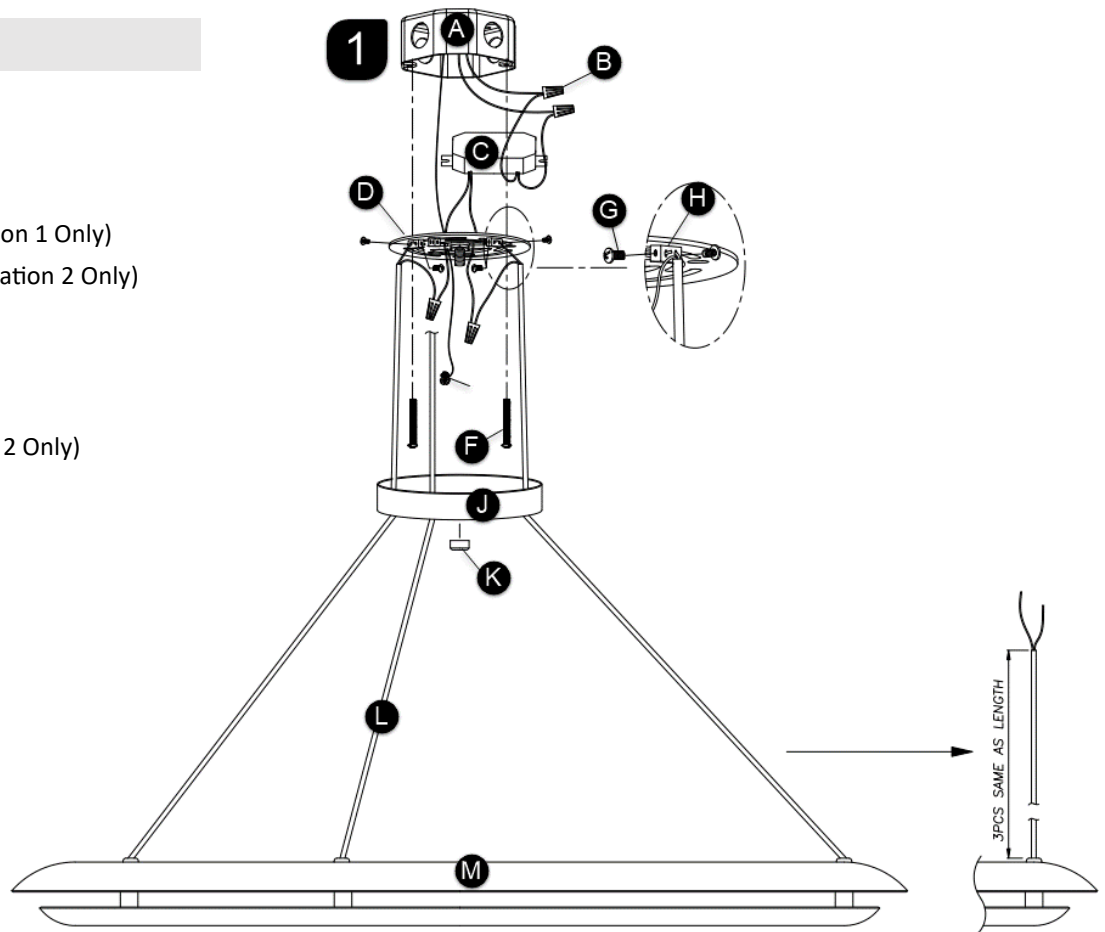

Please Note: It is best to have a second person assist with both installation options described in this install guide.

INSTRUCTIONS (Option 1: Installation with Driver in Junction Box/Illustration 1)

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire to neutral power line wire
 - b) Hot driver wire to hot power line wire
3. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
4. Place the driver in the junction box, ensuring the output driver wires are accessible.
5. Install the mounting plate to the junction box using the provided mounting screws.

III. Preparing the Fixture Cables

1. Determine the desired height of the fixture and adjust each cable as follows:
 - a) Measure and mark the length of the cables equally and pull them through the canopy.
 - b) Pull the cables through the mounting plate to raise the fixture to the determined height.
 - c) Feed the cables through the cable grips on the mounting plate.
 - d) Tighten the set screws on the cable grip to secure them.

IV. Continue Wiring & Installing the Fixture

1. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
2. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative fixture wire to negative output driver wire
 - b) Positive fixture wire to positive output driver wire
3. Carefully tuck all the wires behind the mounting plate and into the junction box.
4. Place the canopy onto the mounting plate. Then secure it in place by screwing the cap nut tightly onto it.

INSTRUCTIONS (Option 2: Installation with Driver in Mounting Bracket/Illustration 2)

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.

II. Preparing the Fixture Cables

1. Determine the desired height of the fixture and adjust each cable as follows:
 - a) Measure and mark the length of the cables equally and pull them through the canopy and the driver cover.
 - b) Pull the cables through the mounting bracket to raise the fixture to the determined height.
 - c) Feed the cables through the cable grips on the mounting bracket.
 - d) Tighten the set screws on the cable grip to secure them.
2. Install the mounting bracket to the junction box using the provided mounting screws.

III. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire to neutral power line wire
 - b) Hot driver wire to hot power line wire
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
5. Place the driver in the mounting bracket, ensuring the output driver wires are accessible.
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative fixture wire to negative output driver wire
 - b) Positive fixture wire to positive output driver wire
7. Place the canopy onto the mounting bracket. Then secure it in place by screwing the cap nut tightly onto it.