

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.: DWC42 NAME: CHANCE OUTDOOR SCONCE

MATERIAL TYPE: METAL FINISH: AGED IRON


SOCKET TYPE: LED SOCKET QTY: 1

BULB WATTAGE: 8W / 2700K / 90+CRI

VOLTAGE: 110V-120V ITEM NET WEIGHT: 6LBS



PLEASE IGNORE THIS DEVICE IN THE BASE

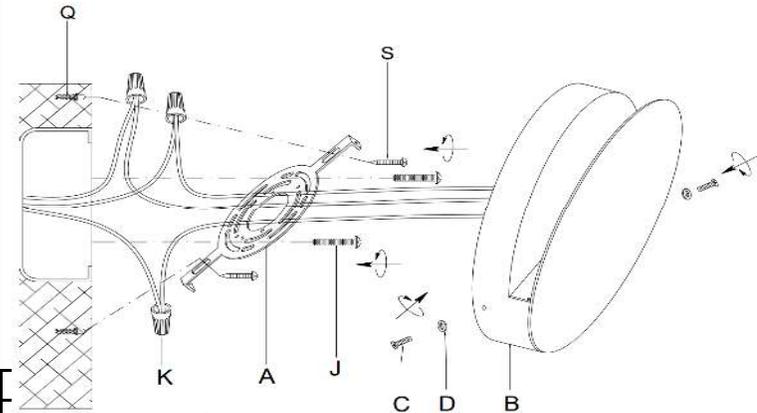

PARTS INCLUDED:

Mounting Plate (A) Qty: 1Pc Back Plate Screw (C) Qty: 2Pcs

Back Plate (B) Qty: 1Pc Rubber Washer (D) Qty: 2Pcs

HARDWARE INCLUDED:

Mounting Screws (J) Qty: 2Pcs

Plastic Wire Cap (K) Qty: 3Pcs

Plastic Anchor (Q) Qty: 2Pcs

Strengthen Screw (S) Qty: 2Pcs

TOOLS NEEDED (Not Included):

1 Screwdriver



These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Drill 2 holes in wall in line with 2 holes of mounting pakte (A) ,Insert plastic anchors(Q) into drilled holes. Attach mounting plate(A) to wall or junction box using mounting screws (J).Then fasten mounting plate(A) to wall by screwing the 2 strengthen screws(S) provided in the plastic anchors(Q) Please pay special attention that you do not need to connect the terminal block(M) in the base.It is used for the wire connection for EURO-market.
4. Connect ground wire from wall to ground wire from lamp by using wire caps (K).
5. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K) DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
6. Attach Back Plate (B) to Mounting Plate (A) by using the enclosed Back Plate Screw(C) and Rubber Washer(D) .Tighten screws with screwdriver.Please be sure the rubber washer(D) is on top threading of the plate screws(C).
7. Use the outdoor silicone caulking compound to caulk completely along the rim of back plate(B) where it meets the wall surface,but leaving a space without the caulking compound at the bottom of back plate to allow the water to seep out if water entered into the J-Box by accident.See more details on extra page .
8. Restore power to junction box and test fixture.

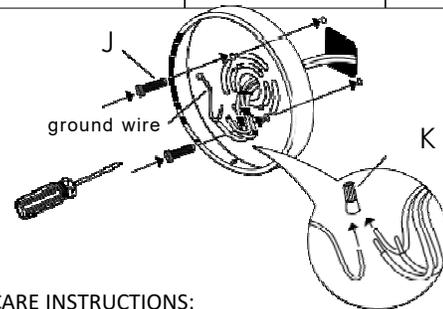


CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS

CAULKING INSTRUCTIONS

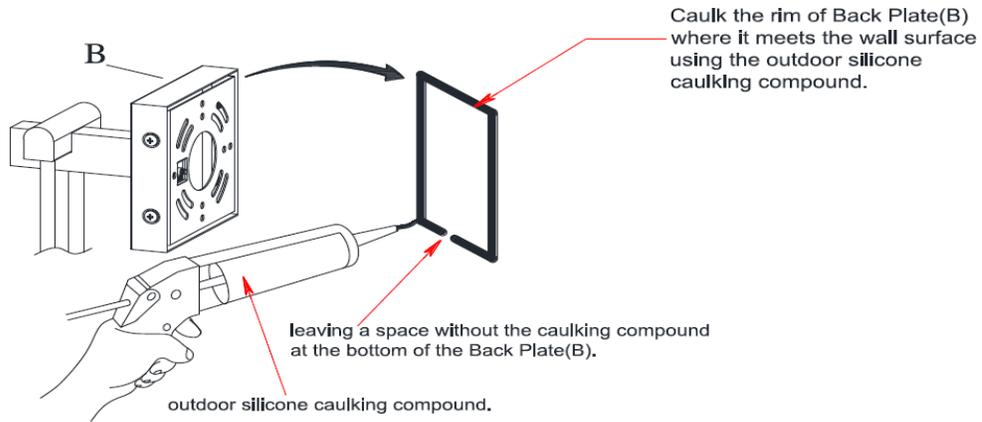

To prevent the water from entering the J-box and causing a short circuit, use the outdoor silicone caulking compound to caulk completely along the rim of Back Plate (B) where it meets the wall surface, but leaving a space without the caulking compound at the bottom of Back Plate (B).

NOTE: Mounting surface should be clean, dry, flat, and a 1/4 inch larger than the Back Plate (B) on all sides.
