

AUDLEY SMALL & MEDIUM LED LANTERNS

GLO1281CDL; GLO1281DL; GLO1291CDL; GLO1291DL

General Product Information




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



OUTDOOR



WET LOCATION SAFE




NEC COMPLIANT JUNCTION BOX




INTEGRATED LED NO BULBS REQUIRED




DIMMABLE
(LED, ELV, TRIAC & 10V)



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Tools Required



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




CAULK GUN

Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

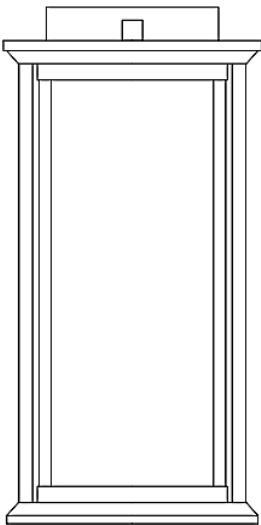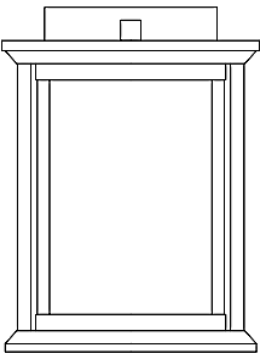

FIXTURE PARTS

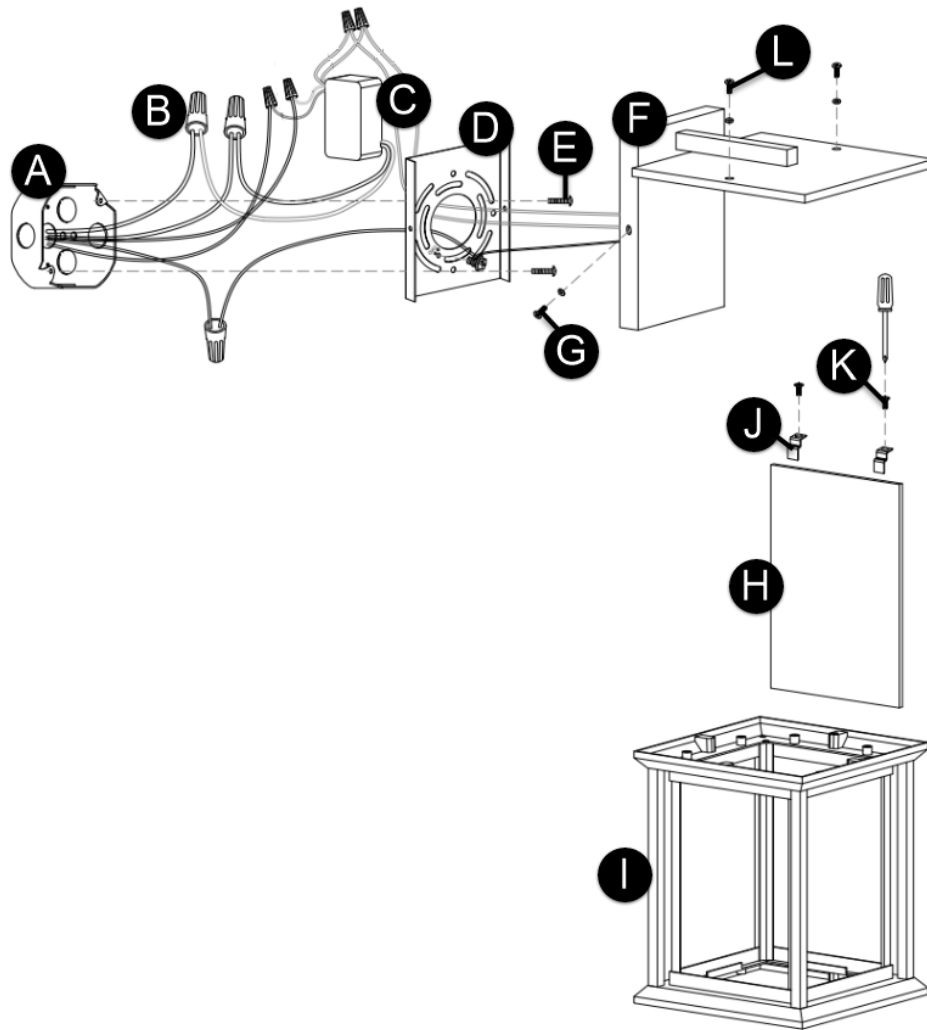

- A. Junction Box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Base
- G. Fixture Screws
- H. Glass Panels
- I. Fixture Frame
- J. Glass Clips
- K. Clip Screws
- L. Frame Screws

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the fixture base.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the supply power wires.
 - a) Connect the hot driver wire (black) to the hot power line wire with a wire nut.
 - b) Connect the neutral driver wire (white) to the neutral power line wire with a wire nut.
3. Place the driver in the junction box, Install the mounting plate on the junction box. Ensure that the driver output wires are accessible.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to negative (-) driver output wire
 - b) Positive (+) fixture wire to positive (+) driver output wire
5. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
6. Carefully place all the wires and wire nut connections onto the mounting plate.

II. Installing the Fixture

1. Mount the fixture base onto the mounting plate and secure it in place by installing the fixture screws.
2. Secure the glass panels to the fixture frame with the glass clips and the clip screws.
3. Use the frame screws to secure the fixture frame to the fixture base and complete the installation.
4. For wet locations, caulk around the base of the fixture with waterproof construction sealant.