




BRAND

Beach Lighting

DESCRIPTION

R3-499AT 3 inch Non-IC Airtight New Construction Housing is made of aluminum and adjusts up to 1.75 inch ceiling thickness. Non IC designation requires that a minimum 3 inch clearance away from insulation should exist on all sides of housing. Airtight feature prevents airflow between attic and living areas. Meets restricted airflow requirements. One 50 watt 12 volt GU5.3 MR16 halogen lamp or LED equivalent is required, but not included. Supplied with a low voltage magnetic transformer. Halogen dimmable with a low voltage magnetic dimmer. LED dimmable per lamp manufacturer recommendation. Must be dimmed using a low voltage magnetic dimmer. ETL listed. 3.25 inch opening x 4 inch housing height. For use with R3 3 Inch GU5.3 MR16 compatible trims, sold separately.

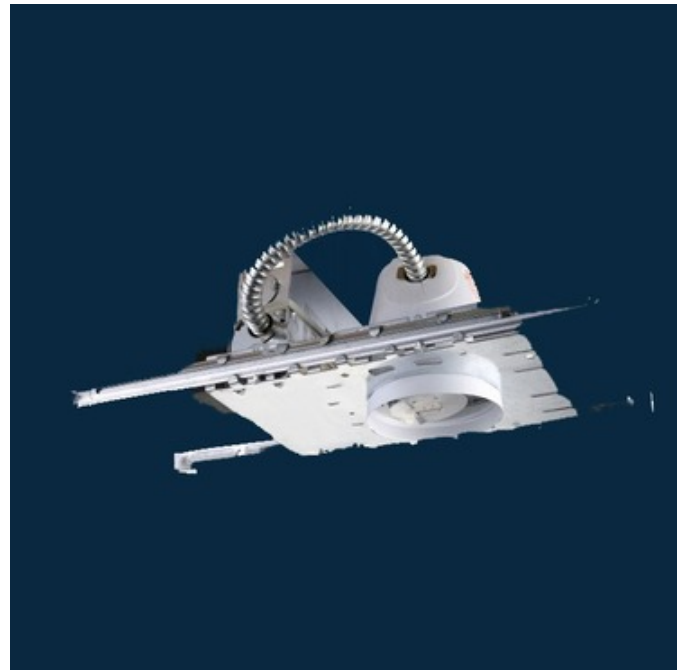

TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Dimmable
DIMENSIONS	3.25"W x 4"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU10/50W/120V Halogen MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction NON IC Airtight
HOUSING HEIGHT	4"

SPEC # BEA36923

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE