


# ASSEMBLY INSTRUCTIONS FOR YOUR CLARE 3-LIGHT ARTICULATING PENDANT

## IMPORTANT SAFETY INSTRUCTIONS:

- \*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.
- \*Turn off power at switch before replacing bulbs.
- \*If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electrical contractor.
- \*We strongly recommend installation by a licensed electrician.
- \*This fixture is UL rated for damp locations.

## ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY AT THE FUSE BOX/CIRCUIT BREAKER.
2. Remove all parts from the carton. Do not throw away any parts.
3. Remove cross bar (A), threaded tube (C), and hang straight (F) from canopy (D). Unthread collar (E) from the hang straight (F) and set aside. Unthread hang straight (F) from the threaded tube (C).
4. Measure the desired drop for the fixture to hang and add/remove extension tubes (H) to reach the desired position. Guide wiring through extension tubes before threading tubes together. Make sure wiring is pulled tight when threading extension tubes (H) together to prevent damage to the wire.
5. Pull the cord taut from above and thread the bottom extension (H) onto the threaded tube exiting housing (J). Thread the remaining extension tubes (H) together until hand-tight.
6. Carefully slide collar (E) and canopy (D) down extensions (H) and let rest on housing (J).
7. Guide wiring through hang straight (F) and thread hang straight (F) to the top threaded tube of extension rod (H).
8. Guide wiring through threaded tube (C) and thread tube (C) into hang straight (F). Pull wire taut to prevent damage to the wiring while threading the parts together.
9. Lift fixture to ceiling outlet box and affix cross bar (A) to outlet box using screws (B) provided.
10. Cut the cord to the desired length to make the proper electrical connections. NOTE: at least 8 inches of wire will be needed for the proper connections.
11. A LICENSED ELECTRICIAN IS RECOMMENDED. Follow steps 12-14 as described to make the proper electrical connections.
12. Attach ground wire from fixture (green or silver in color) to the ground wire from the outlet box. Fasten wires together with wire nut (M) and tightly wrap connection with electrical tape.
13. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (M) and tightly wrap connection with electrical tape.
14. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (M) and tightly wrap connection with electrical tape.
15. Carefully push wire connections back into the ceiling outlet box.
16. Slide canopy (D) up extensions (H) and hold flush against the ceiling. Slide collar (E) up extensions (H) and thread onto exposed threading of hang straight (F) until threaded collar secures canopy (D) against the ceiling.
17. Install three 60-watt max, Type A, medium base bulbs into the sockets located inside shades (L).
18. Move shade (L) into desired position by rotating at joint (K). Repeat for remaining shades.
19. Twist the counterweight balls (N) onto the arms.
20. Reconnect the main electrical supply at the fuse box/circuit breaker and test the fixture.

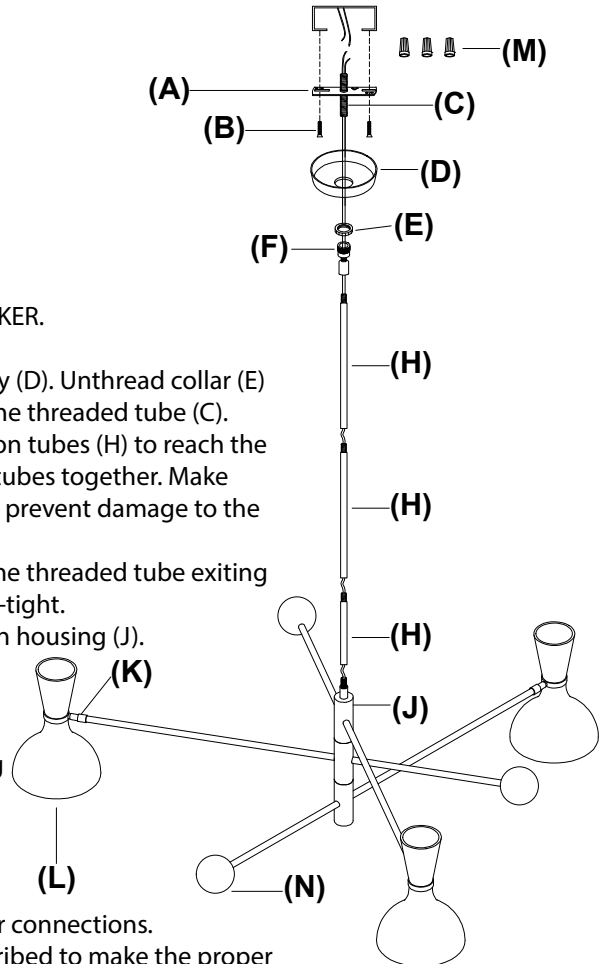

**\*\*To clean, use soft cloth only. Do not use any chemical or abrasive cleaners.\*\***

**BB10BB**