



BRAND

Contrast Lighting

DESCRIPTION

IT4000E 3 Inch Low Voltage Non-IC Remodel Housing is equipped with thermal protection and is designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt electronic transformer included. One 20-35 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage electronic dimmer. See attached manufacturer dimmer compatibility reference when using LED bulb option. Suitable for damp locations. UL listed. 3.25 inch ceiling cut out. 12 inch length x 4.25 inch width x 6 inch height. A complete fixture includes a housing and trim, sold separately.




TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	20W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.1"L x 4.18"W x 6"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU5.3 (bipin)/20W/12V Halogen 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	6"
APERTURE SIZE	3.000"

SPEC # CLT3806

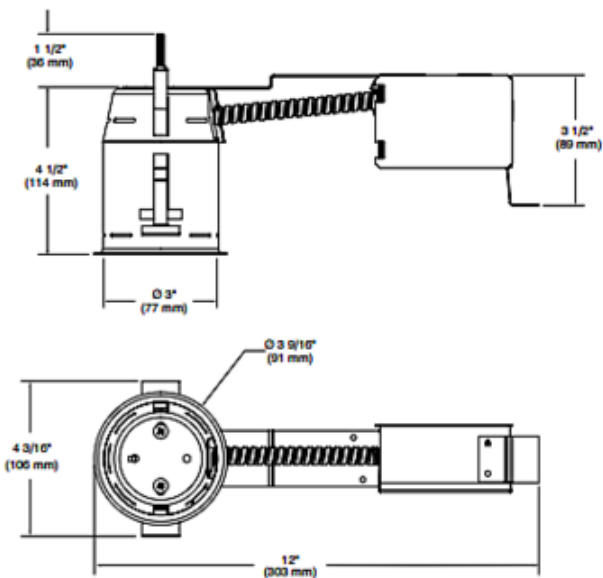

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE