

Lightology

lightology.com
866-954-4489
07-30-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **CLT3808**

Approved On: _____ Approved By: _____

2.5IN Remodel MLV Non-IC Housing - Discontinued Model

By Contrast Lighting



Description




IT5000CM 2.5 Inch Low Voltage Non-IC Remodel Shallow Housing is equipped with thermal protection and is designed for remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer is included. One 20 watt, 12 volt GU4 MR11 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Suitable for damp locations. UL listed. 2 5/8 inch ceiling cut out. 11.75 inch length x 3.7 inch width x 3.25 inch height. A complete fixture includes a housing and trim, sold separately.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	20W
DIMMER	Low Voltage Magnetic
DIMENSIONS	11.75"L x 3.7"W x 3.25"H
BULB NOT INCLUDED	MR11/Bipin/20W/12V Halogen

Technical Information

PRODUCT DIMENSIONS	Cutout: 2 5/8"
APERTURE SIZE	2.500"
HOUSING HEIGHT	4"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall with Trim

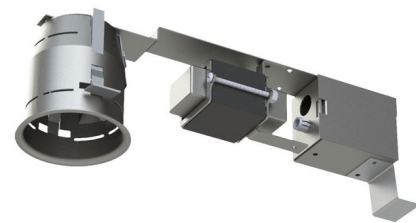

Notes: