

WATSON FLUSHMOUNT 292379

PROFESSIONAL INSTALLATION REQUIRED

CAUTION: BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

Important Safety Instructions:

- These instructions are provided for your safety. It is important that they are read carefully before use to ensure safe operation of the product.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- This fixture has been rated for (04) **40 watt maximum Type A bulbs** (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage. Consider LED bulbs if brighter light output is desired.
- DRY LOCATIONS ONLY.
- **Save these instructions.**


WARNING:

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **Check the cable properly for any loose or damaged connections.**
- **If the unit is no longer functioning, do not attempt to fix it by yourself. Only a qualified technician is allowed to disassemble and repair.**
- **If the external flexible cable cord of this luminaire is damaged it shall be exclusively replaced by a qualified electrician in order to avoid hazard.**

TOOLS REQUIRED : Ladder, Flat Head Screw Driver, Phillips Head Screw Driver, Wire Cutter/Stripper, & Electrical Tape.

- 1). Place the Mounting plate (A) over the Junction box and attach the Mounting Plate using the 2x mounting screws (B)


Installation Instructions :

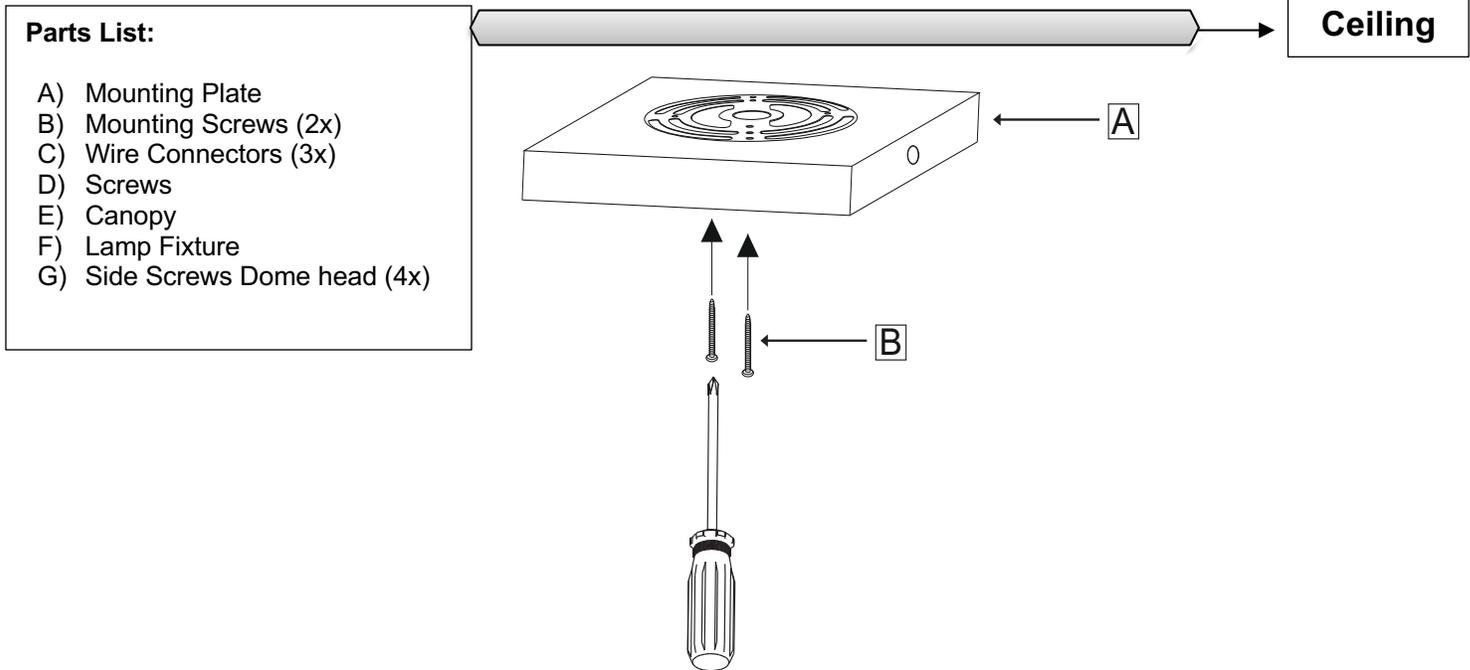

2). Establish electrical connections:

- a) Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white or ribbed insulation). Fasten each together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
- b) Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black or smooth insulation). Fasten each together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NETURAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- c) Connect the GROUND WIRE of the fixture to the GROUND Junction BOX WIRE (usually green or bare) with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If there is no ground wire in the Junction box, use a screwdriver to secure the end of the fixture ground wire to the GREEN screw located on the Mounting Plate (A).


3). Hold canopy (E) up to the mounting plate (A). use Dome Head Side Screws (G) to attach the Canopy (E) to mounting Plate (A).

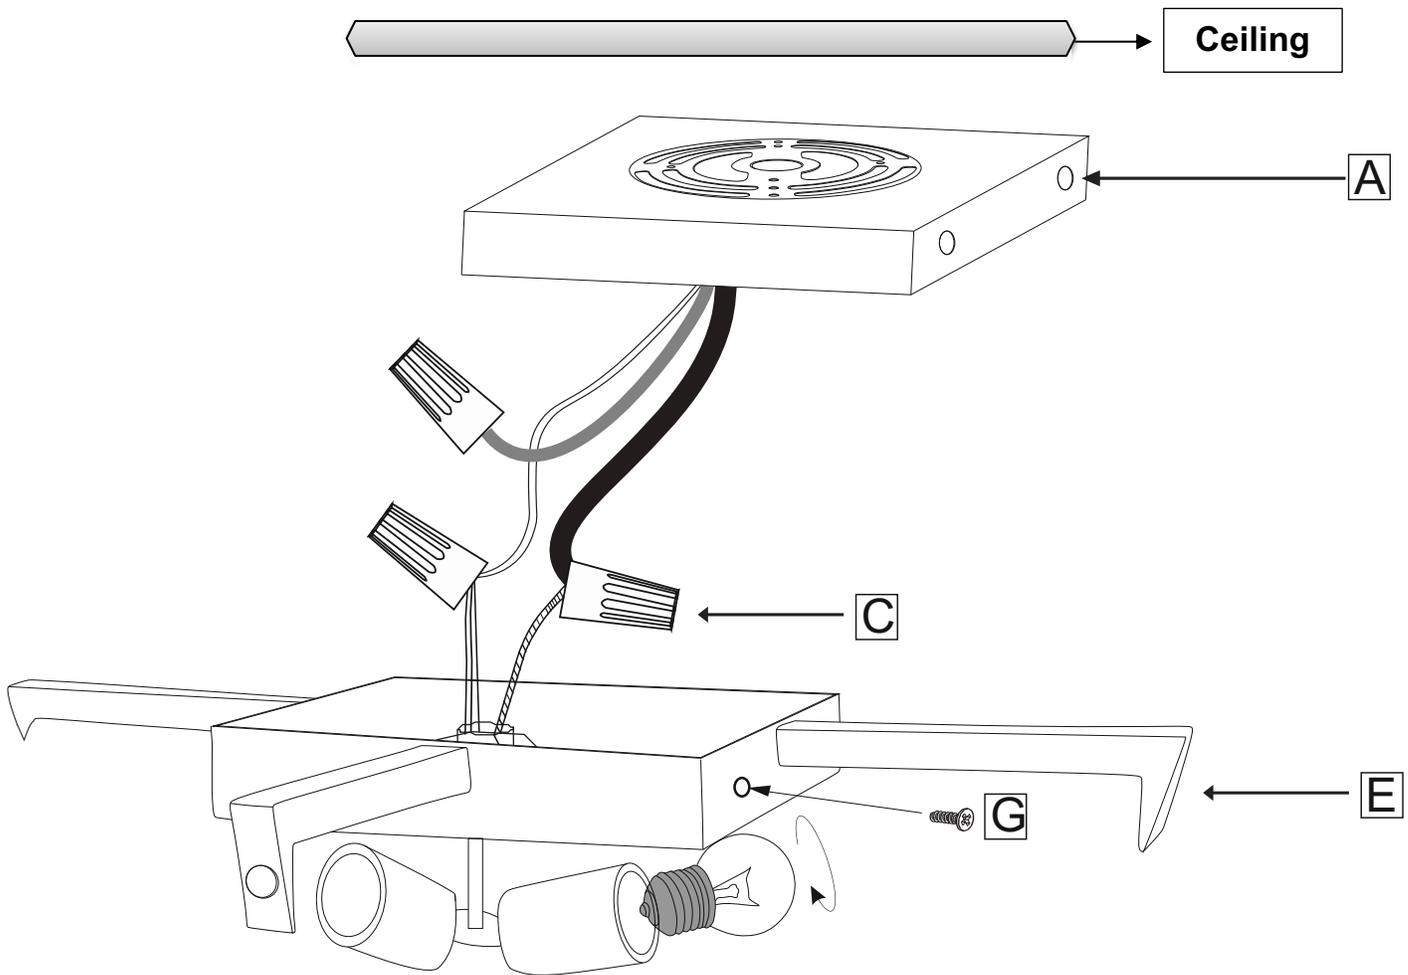

4). Insert the Bulb 40 Watt max Type A into socket as shown in picture. Repeat for all 4 bulbs

DO NOT EXCEED THE RECOMMENDED WATTAGE. Consider LED bulbs if brighter light output is desired.

5). Lift the Lamp Fixture (F) into the Canopy (E) use 4x Lamp Fixture Screw (D) to attach the canopy (E) to Lamp Fixture (F). **(DO NOT OVERTIGHTEN THE SCREWS)**

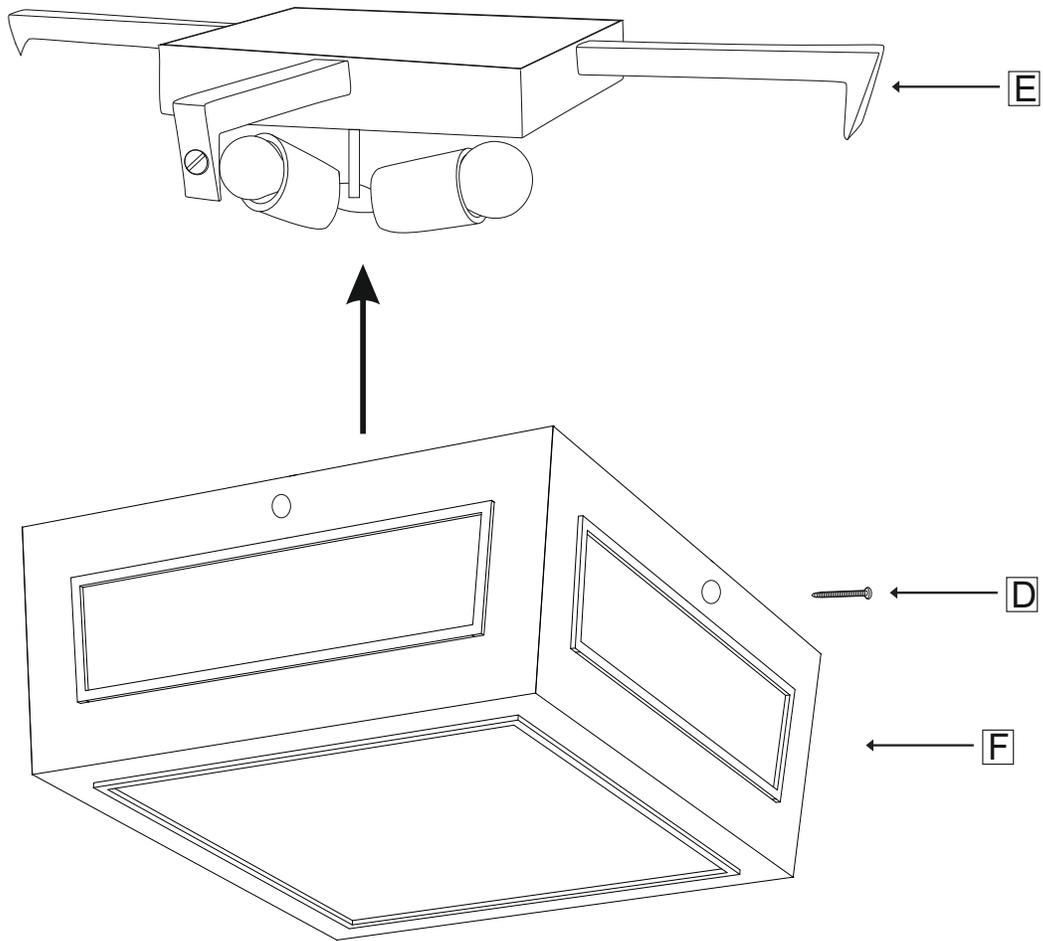

6). Restore power to ceiling outlet junction box and test fixture.

7). Installation is complete.

Care Instructions:

- Do not use abrasive cleaning solution as it may cause damage to the fixture's finish.
- Wipe clean with a soft, dry cloth or static duster.