

PALECEK®

601 PARR BOULEVARD | RICHMOND | CA 94801

PENDANT INSTALLATION INSTRUCTIONS

VERALDI SINGLE PENDANT

221479

PROFESSIONAL INSTALLATION REQUIRED

CAUTION: BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.




Important Safety Instructions:

- These instructions are provided for your safety. It is important that they are read carefully before use to ensure safe operation of the product.
- Installation by a licensed professional electrician required.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- This fixture has been rated for **(1) X 25 watt maximum Type B bulb** (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage. Consider LED bulbs if brighter light output is desired.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- **Save these instructions.**

WARNING:


- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **Check the cable properly for any loose or damaged connections.**
- **If the unit is no longer functioning, do not attempt to fix it by yourself. Only a qualified technician is allowed to disassemble and repair.**
- **If the external flexible cable cord of this luminaire is damaged it shall be exclusively replaced by a qualified electrician in order to avoid hazard.**

TOOLS REQUIRED (not included): Ladder, Phillips Head Screwdriver and Wire Cutter/Stripper & Electrical Tape, Measure Tape.


Parts List:			
CODE	IMAG E	DESCRIPTION	QTY.
A		MOUNTING PLATE	1 Pc.
B		MOUNTING SCREWS	2 Pcs.
C		WIRE CONNECTOR	3 Pcs.
D		CORD GRIP	1 Pc.
E		CANOPY	1 Pc.
F		CANOPY SCREWS	2 Pcs.
G		ALLEN KEY	1 Pc.
H		GLASS CONE	1 Pc.
I		HOLDER PLATE	1 Pc.
J		HOLDER COVER	1Pc.

Step 1). Lay the product out on the floor. If there is no carpet, cover the floor with a soft cloth so as not to scratch the finish of the light or the floor. Then gently remove the Glass Cone (H) By removing the Holder cover (J) and Holder Plate (I). As shown in illustration.

Step 2). Gently loosen the cord grip (D) with the allen key (G) in order to adjust the height, then pull the slack cable through the Cord Grip (D) to Determine the desired height, use a tape measer to help tighten the cord grip once desired drop has been reached.

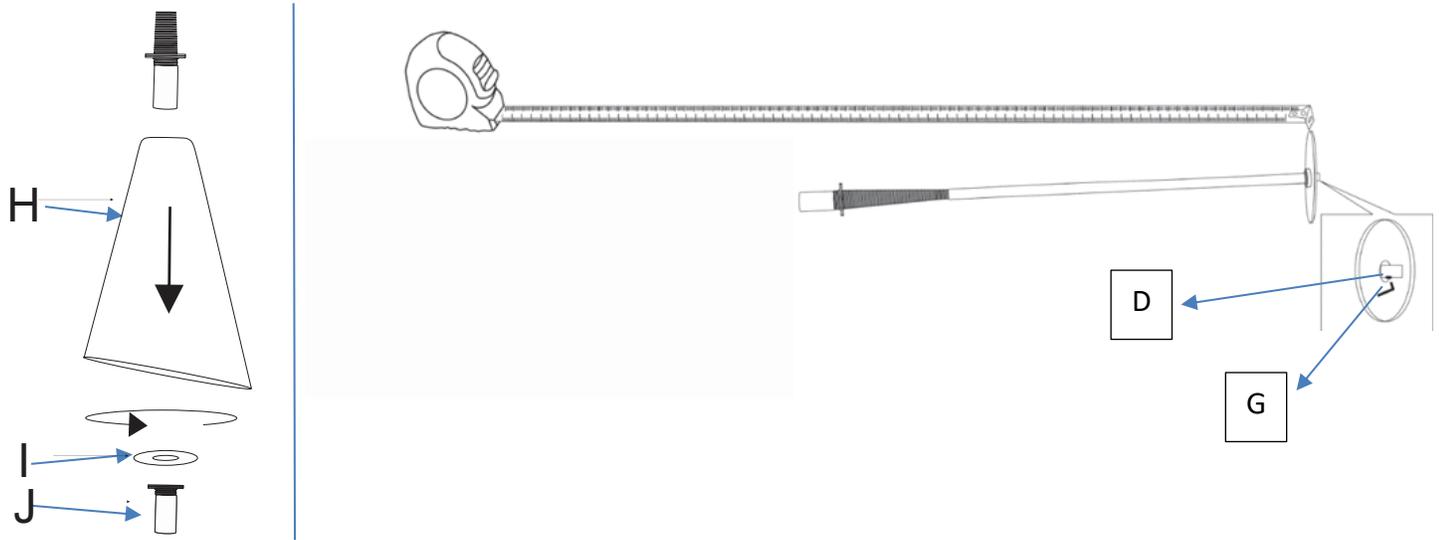

Step 3). Place the Mounting plate (A) over the Junction box and attach the Mounting Plate using the 2x mounting screws (B)

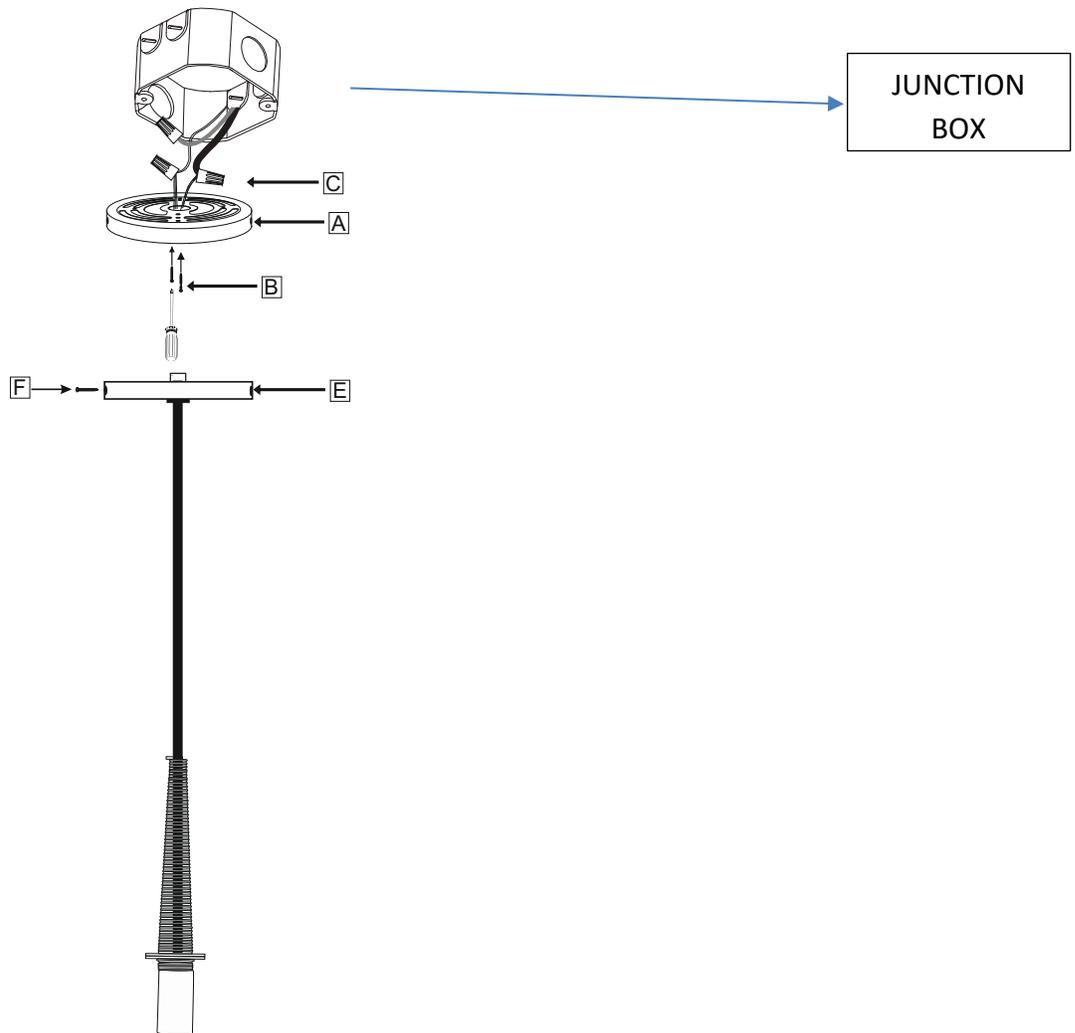


Step 4). Establish electrical connections:

- a) Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white or ribbed insulation). Fasten each together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
- b) Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black or smooth insulation). Fasten


each together with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NETURAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**

- c) Connect the GROUND WIRE of the fixture to the GROUND Junction BOX WIRE (usually green or bare) with a wire connector (C) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If there is no ground wire in the Junction box, use a screwdriver to secure the end of the fixture ground wire to the GREEN screw located on the Mounting Plate (A).

Step 5). Hold canopy (E) up to the mounting plate (A). use Phillips Head Side Screws (F) to attach the Canopy (E) to mounting Plate (A).

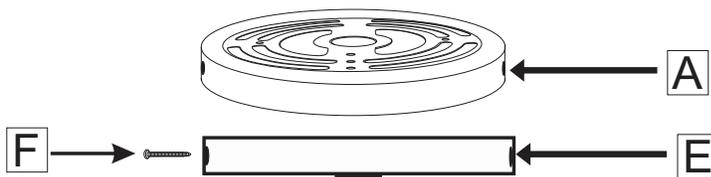

Step 6). Insert the Glass Cone (H) in Lamp Fixture and put the Holder Plate (I) through bulb socket then tighten the holder cover (J) securely. Do not over-tighten the holder cover (J).

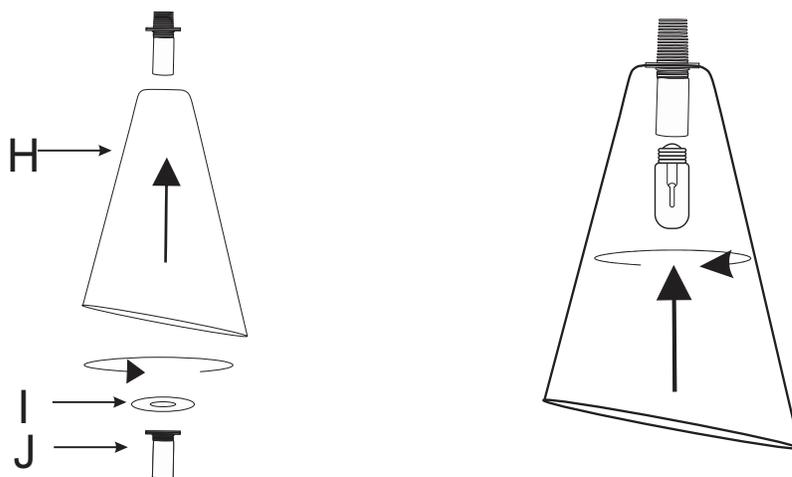

Step 7). Insert the Bulb (1) X 25 Watt max Type B into socket as shown in picture.

DO NOT EXCEED THE RECOMMENDED WATTAGE. Consider LED bulbs if brighter light output is desired.

Step 8). Restore power to ceiling outlet junction box and test fixture.

Step 9). Installation is complete.

Care Instructions:

- Do not use abrasive cleaning solution as it may cause damage to the fixture's finish.
- Wipe clean with a soft, dry cloth or static duster.