



BRAND


Iris

DESCRIPTION

PN5 5 inch Non-IC Air-Tight new construction housing is a speceification grade residential housing that accepts fluorescent, low voltage halogen and line voltage incandescent lamp moduels and elements (trims). For use with narrow joist spacing. Air-Tight to prevent energy loss, room drafts, dust marks on ceiling, and reduce sound transmission. Insulation must be kept 3 inches away from side an top of the housing6. A complete fixture requires a platform (housing), lamp module, and 5 inch optical element (trim), sold separately. UL listed. Damp location listed. IBEW union made. Lamp ratings based on trim selected, sold separately.



TRIM COLOR	N/A
BODY FINISH	Raw Aluminum
WATTAGE	N/A
DIMMER	N/A
DIMENSIONS	16.5"L x 8.5"W x 8.5"H
LAMP	N/A
Technical Information	
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction NON IC Airtight
HOUSING HEIGHT	9"
PRODUCT DIMENSIONS	Ceiling Cutout: 6.25 In
SPEC #	IRI41463

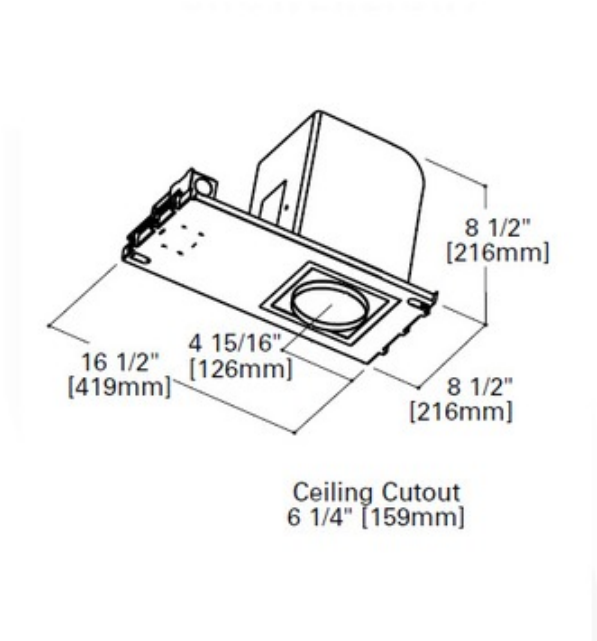

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE