

# oxygen

Model: 3-8-1000-0

## HANDHELD TRANSMITTER

**NOTE:** This unit is equipped with an automatically learned type remote control. There are no frequency switches on the receiver and transmitter; the receiver unit will automatically scan the frequency from the handheld remote if any changes are made. This unit has 65,000 different code combinations.

### Remote pairing process:

Install batteries included with the transmitter. (Fig. 1)

**NOTE:** To prevent damage to the transmitter, remove these batteries if not used for long periods of time (months).

With the fan's power off, restore power to the fan. Press and hold "■" button for about 5 seconds and release. If optional light kit is installed, the light kit will flash twice and the signal light on the handheld remote will come on when the button is pressed. The fan has completed the pairing process with the handheld remote and is ready for use.

## OPERATING INSTRUCTIONS

A. **H, M and L** buttons: (Fig. 2)

These three buttons are used to set the fan speed as follows:

- H= high speed
- M= medium speed
- L= low speed

B. ■ button:

This button turns the fan off.

C. The "☀️" button:

The "☀️" button turns the light ON or OFF and also controls the brightness setting. Press and hold the button to dim and brighten the light. Press and hold the button and release the button at desired brightness. The light key has an auto-resume, it will stay at the same brightness as the last time it was turned off.

D. The "↺️" button is used to set the fan forward or reverse, press the button forward (for warm weather) or reverse (for cool weather).

**NOTE:** To operate the reverse function on this fan, press the reverse button while the fan is running.

Fig. 1


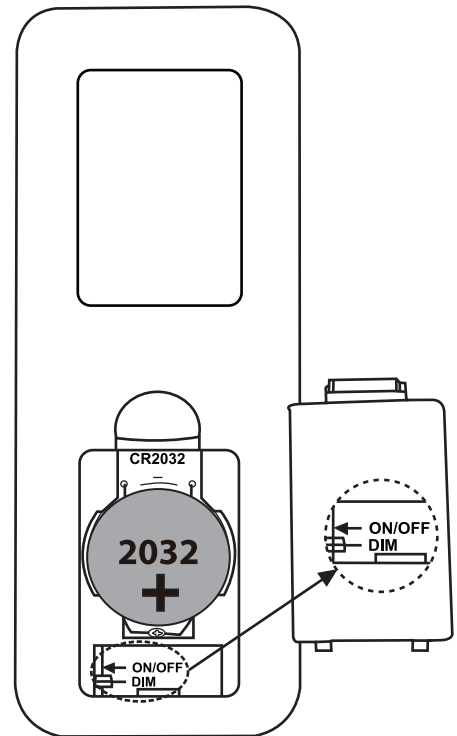


Fig. 2

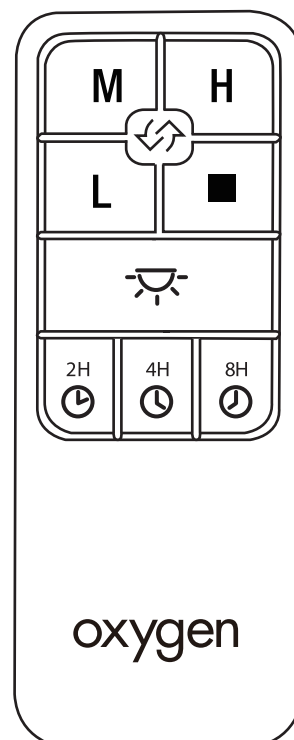

E. "2<sup>H</sup>", "4<sup>H</sup>" and "8<sup>H</sup>" buttons:

Pressing the timer buttons will automatically turn fan off after 2, 4, or 8 hours.

Please note that the timer buttons is active **only** when the fan speeds turn **on**. the light is **not** included.

You can cancel the timer by pressing ■ button and re-start the fan speed.

F. "DIM" and "ON/OFF" dip switch: (Fig. 2)

The "DIM" selection is the light dimmable selection and is to be used with all bulbs except for CFL bulbs. The "ON/OFF" selection is the light on only (no dimmable function) and is to be used with CFL and LED bulbs as CFL bulbs cannot be dimmed properly.

**NOTE:** The distance between the transmitter and receiver should not be greater than 30 feet. For best performance, make sure the Black Antenna on the end of the receiver unit remains extended and not tangled with any of the electrical wires.