



BRAND

Juno Lighting

DESCRIPTION

IC25R 5 Inch Shallow Universal IC Remodel Housing is an energy efficient sealed housing. IC remodel housing for remodel application where back side of ceiling is not accessible. Installs through an opening in the ceiling from below. Secured in place by factory installed remodel springs. Can be completely covered with insulation. Accommodates ceilings up to 1 1/8 inch thick. When used with Air-Loc gasket (ALG5R), stops infiltration and ex-filtration of air, reducing heating and cooling costs. Trims shown with Air-Loc symbol do not require a gasket. One 120 volt, A19, BR30, PAR30, PAR20, R20 or PAR30L medium base halogen/incandescent lamp or LED equivalent is required, but not included. Lamp type and wattage dependent upon housing/trim combination (see attached Juno manufacturer specification). Incandescent/halogen dimmable with a standard incandescent dimmer. Consult lamp manufacturer for dimmer compatibility when using an LED equivalent lamp. UL listed for through-branch wiring, damp locations and IP. Product thermally protected against improper use of lamps. Trim 212N is wet location approved for covered ceiling applications. 12.5 inch length x 5.9 inch width x 5.75 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Aluminum

TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	N/A
DIMMER	Dimmable
DIMENSIONS	12.5"L x 5.875"W x 5.75"H
BULB NOT INCLUDED	
LAMP	PAR30L/Medium (E26)/120V Halogen 1 x PAR30L/Medium (E26)/120V LED 1 x PAR20/Medium (E26)/120V Halogen 1 x PAR20/Medium (E26)/120V LED 1 x PAR30S/Medium (E26)/120V Halogen

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel IC
HOUSING HEIGHT	6"
PRODUCT DIMENSIONS	Ceiling Cutout: 5.50 in

SPEC #	JUN52455
--------	----------

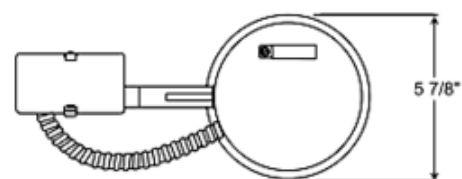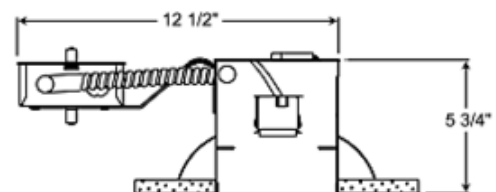

5 1/2" CEILING CUTOUT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE