


**FOR YOUR SAFETY WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.**

**GENERAL** You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling which contains a radiant type heating system. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician.

**NOTE:** Proper wiring is essential for the safe operation of this fixture.

## ASSEMBLY INSTRUCTIONS

5014S-XX-LED

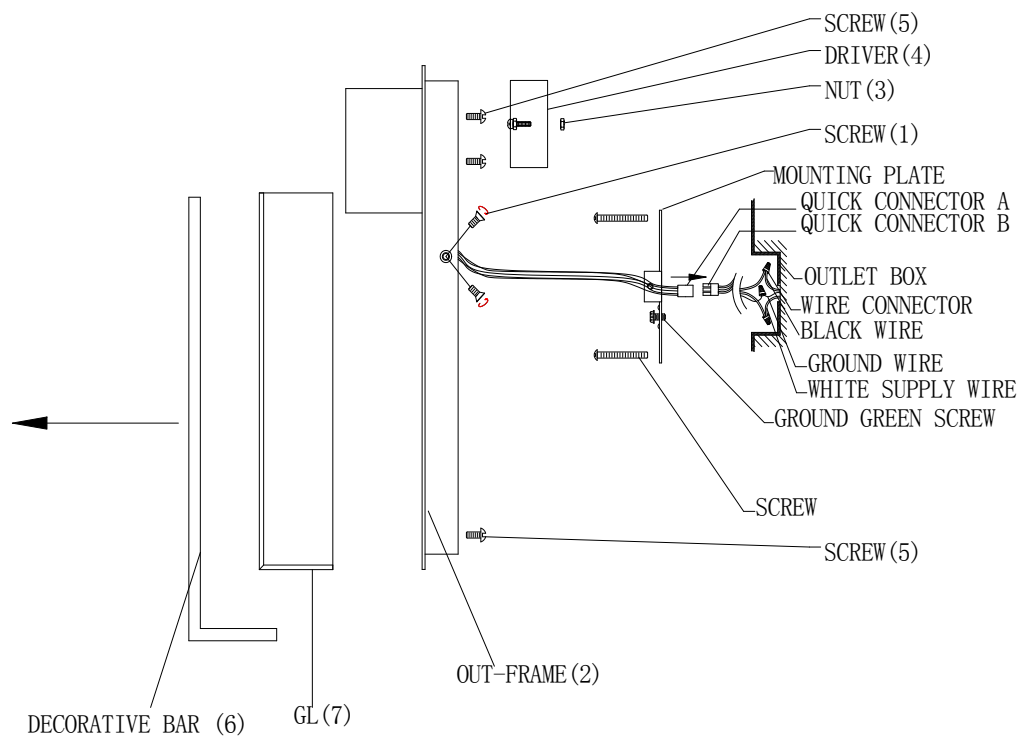

### READ & SAVE

### INSTALLATION & OPERATION INSTRUCTIONS

#### TOOLS & MATERIALS REQUIRED

|                   |                 |
|-------------------|-----------------|
| Screwdriver       | Wire Cutters    |
| Adjustable Wrench | Wiring Supplies |

### CAUTION

Prior to assembly, refer to ELECTRICAL CONNECTIONS section. If you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

### GENERAL

1. Be sure to read these instructions and review the diagrams thoroughly before beginning.
2. Electrical connections must be in accordance with local codes, ordinances, or the National Electric Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.

3. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing appropriate fuse at fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.

## **PREPARE THE FIXTURE**

### **NOTE: First turn off electricity**

Detach the circular strap from the backplate and mount the circular strap to the outlet box in your wall using the two screws provided.

## **ELECTRICAL CONNECTIONS 120V~, 60Hz**


Connect white wire from Quick connector B(in the hardware package) to white neutral wire from supply circuit,Connect black wire from Quick connector B to black hot wire from supply circuit.Connect green wire to green or bare wire or grounding screw on mounting bracket from Quick connector. In all cases grounding conductor to earth must be used. Use UL/CSA Listed wire connects suitable for the size, type, and number of conductors. No loose strands or loose wires should be present. Secure wire connectors with UL/CSA Listed electrical tape.Connect the Quick connector A and B.

1. Spread electrical splices so black wires are on one side of outlet box and white wires on the other.
2. Attach the fixture to the outlet box in your wall with side screws . Be careful not to pinch any of the wires between the fixture and the mounting plate or outlet box.
3. Once the fixture is mounted on the wall, caulk the space between the wall and the upper area of the back plate to prevent water seeping into the outlet box. Leave the bottom area un-caulked for drainage of any water which might leak into the enclosure.
4. Installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.
- 5.Glass replacement:unscrew the screws(1) on the backplate,take down the fixture,unscrew the nut(3)to take away the driver(4),then unscrew the screws(5)to take away the decorative bar(6),finally replace new glass by slip out and in,then secure all the screws and nut.

### **Note:**

- 1.The quick connectors have been included on the fixture to allow for ease of installation when replacing your fixture in future. Simply disconnect your fixture by separating A+B and replace with new fixture connecting A+B.
- 2.Select your CCT color before installing: 2700K,3000K,3500K,4000K,5000K

**CAUTION: LED fixtures can operate at high temperatures please use caution when touching during operation or after operation.**



## Recommended Dimmer list

| No. | Brand   | Item No.                        | Feature                                                                       | Grade      | Dimming Range |
|-----|---------|---------------------------------|-------------------------------------------------------------------------------|------------|---------------|
| 1   | Lutron  | DVCL-153P-WH                    | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 10% to 100%   |
| 2   | Lutron  | DVSCCL-153P-ES                  | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 10% to 100%   |
| 3   | Lutron  | DVCL-253P-WH                    | 250W 2.0A Dimmable LED, CFL, 600W Incandescent /Halogen                       | Compatible | 10% to 100%   |
| 4   | Lutron  | DVELV-300P-WH                   | 300W Single-Pole Preset dimmer                                                | Compatible | 10% to 100%   |
| 5   | Lutron  | PD-6WCL, Caseta Wireless dimmer | 100W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen, WIFI                | Compatible | 10% to 100%   |
| 6   | Lutron  | CTCL-153P-IV                    | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 10% to 100%   |
| 7   | Lutron  | S-600P-WH                       | 600W Halogen/Incandescent Dimmer                                              | Compatible | 10% to 100%   |
| 8   | Lutron  | SELV-300P-IV                    | 300W Preset dimmer                                                            | Compatible | 10% to 100%   |
| 9   | Lutron  | AYCL-253P-WH                    | 250W 2.0A Dimmable LED, CFL, 600W Incandescent /Halogen                       | Compatible | 10% to 100%   |
| 10  | Lutron  | MACL-153M-WH                    | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 10% to 100%   |
| 11  | Lutron  | DVWCL-153PH-WH                  | 150W, 1.25A White, Compact Fluorescent Light/LED Or 600W Incandescent/Halogen | Compatible | 10% to 100%   |
| 12  | Copper  | SAL06P                          | 300W 2.5A Dimmable LED, CFL, 600W Incandescent /Halogen                       | Compatible | 10% to 100%   |
| 13  | Leviton | DSL06-1LZ                       | 300W 2.5A Dimmable LED, CFL, 600W Incandescent /Halogen, WIFI                 | Compatible | 10% to 100%   |
| 14  | Leviton | DW6HD                           | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 20% to 100%   |
| 15  | Leviton | 6672                            | 150W 1.25A Dimmable LED, CFL,                                                 | Compatible | 10% to 100%   |
| 16  | Leviton | IPL06-10Z                       | 150W 1.25A Dimmable LED, CFL,                                                 | Compatible | 20% to 100%   |
| 17  | Leviton | DSM10-1LZ                       | 450W 3.75A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 20% to 100%   |
| 18  | Leviton | 6674                            | 150W 1.25A Dimmable LED, CFL,                                                 | Compatible | 20% to 100%   |
| 19  | Leviton | 6633                            | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 10% to 100%   |
| 20  | Leviton | TSL06-1LW                       | 300W 2.5A Dimmable LED, CFL, 600W Incandescent /Halogen, WIFI                 | Compatible | 35% to 100%   |
| 21  | Leviton | 6615-POW                        | 300W 2.5A Dimmable LED, CFL,                                                  | Compatible | 20% to 100%   |
| 22  | Legrand | RHCL453PW                       | 450W 3.75A Dimmable LED, CFL,                                                 | Compatible | 10% to 100%   |
| 23  | Legrand | ADPD453LM2                      | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 20% to 100%   |
| 24  | EATON   | TAL06P2-C2                      | 300W 2.5A Dimmable LED, CFL, 600W Incandescent /Halogen, WIFI                 | Compatible | 10% to 100%   |
| 25  | FEIT    | 72309                           | 150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen                      | Compatible | 10% to 100%   |

**Minimal buzzing noise may occur with some dimmers.**