

INSTALLATION AND SAFETY INSTRUCTIONS

FOR YOUR SAFETY WARNING

BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

GENERAL

You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling, which contains a radiant type heating system. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician.

NOTE: Proper wiring is essential for the safe operation of this fixture.

FIXTURE ASSEMBLY

Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this fixture.

INSTALLATION

IMPORTANT: Do not attach fixture directly to outlet box.

STEP 1

A. Prepare to make wire connections. (Connectors are not included with fixture.)

Strip and prepare wire ends according to instructions supplied with connectors.

STEP 2 Make Wire Connections -

B. Use standard wire connectors to make all wire


B. Connect White Supply Wire from the Post to White Wire from fixture.

C. Connect Black (or Red) Supply Wire from the Post to Black Wire from fixture.

D. Connect Ground Wire from the Post to Ground Wire from fixture.


E. Twist connectors until wires are tightly joined together.

F. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Post.

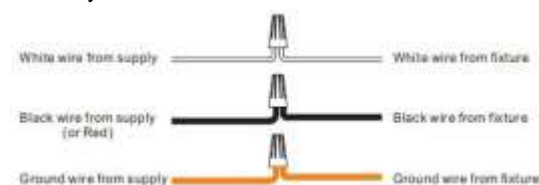

STEP 3 - Attach Fixture Body to Post

A. Secure the Fixture to Post with (3) Mounting Screws.

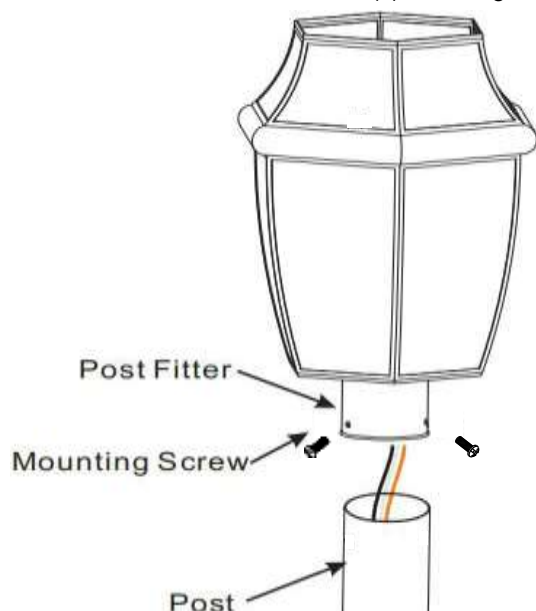

STEP 5 - Install Bulb

A. This fixture uses standard bulb with a candelabra screw base. Maximum 60 watts.

B. Insert bulb and screw snugly into place.

STEP 6 Attach Fixture Hood to Fixture Body -

a. Place the Fixture Hood Assembly (D) over the top end of the Center Stem (E), attach to the top edge of the Cage. Pass the Waterproof Washer (C) over the Center Stem (E) and secure with the Finial (B). Hand tighten until snug. Your fixture is now assembled and ready to use.

CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.



Line art shown may not exactly match the fixture enclosed. However, the installations do apply to this fixture.

ITEM NO: 580PHM / 580PHB

Warning: Risk of fire


Before you do the installation, thoroughly read the instruction sheet. If you do not have sufficient electrical wiring experience, please consult a qualified licensed electrician.

All electrical connections must be in accordance with Local and National electrical code (N.E.C) standard

WIRING INSTRUCTION

WARNING: DISCONNECT POWER AT THE MAIN ELECTRICAL PANEL BEFORE INSTALLATION

1. Expose the supply wires from the post for wiring connections
2. Connect the ground wire from the post head to the post ground wire using the wire connector
3. Connect the white wire/Ribbed wire from the post head to the supply white wire from the post using the wire connector.
4. Connect the Black wire/smooth wire from the post head to the supply black wire from the post using the wire connector.
5. After all connections are secured, carefully, tuck wires into the post no loose strands, then, slide down the post head over on the post top secured with Allen screws
6. remove the top cap, assemble the 10" extension on the center hub top, tighten the mounting screws to hold the 10" extension securely in place.
6. The post head installation is completed, then, do the installation of light fixture properly on the arm of post head

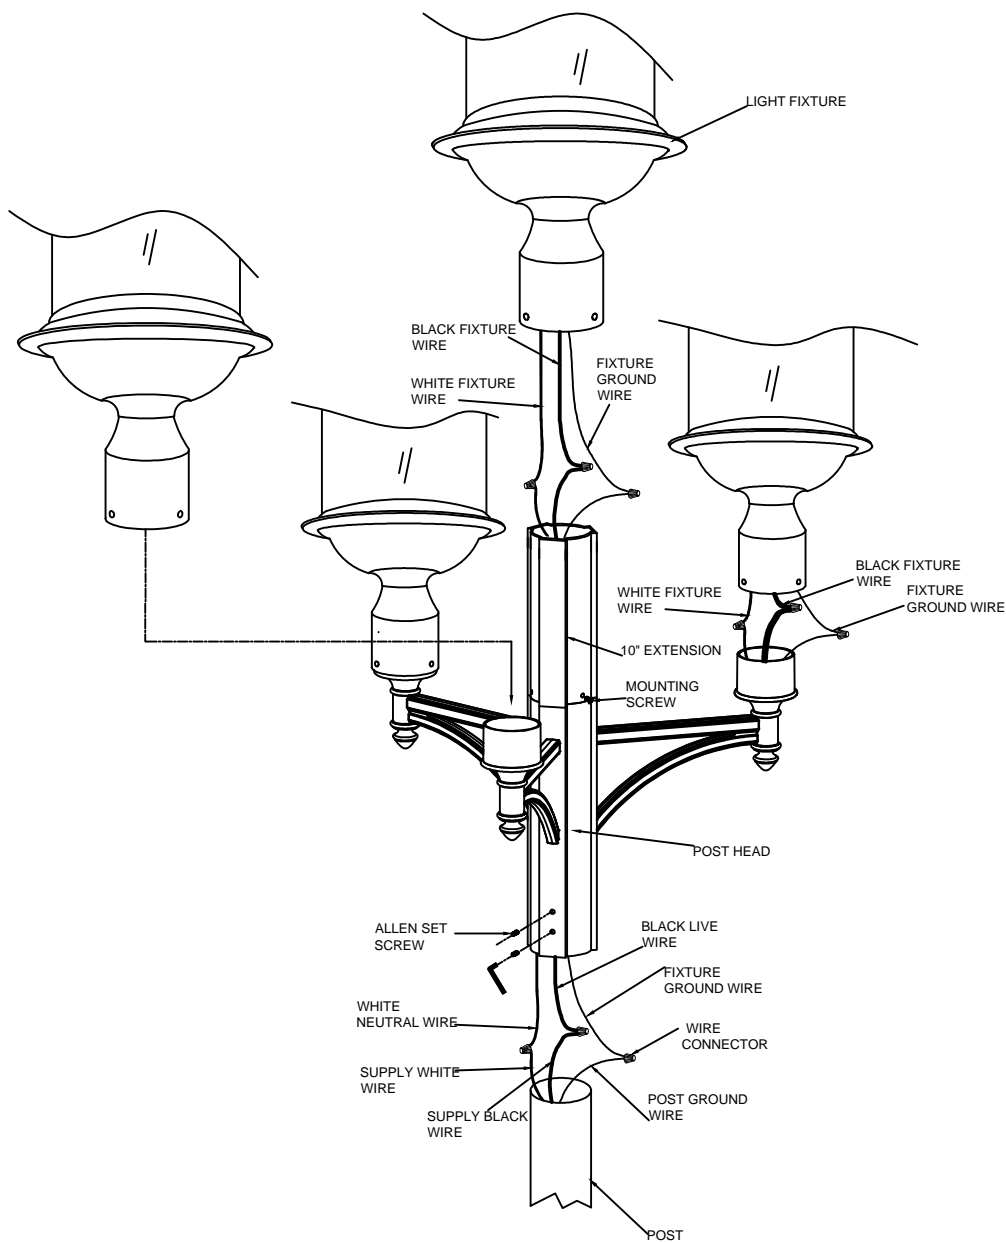

501-4 BK

INSTALLATION INSTRUCTIONS

Model 5010P-BK

FOR YOUR SAFETY WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

SAFETY ALERT!

FIND THE LOCATION OF ANY UNDERGROUND PLUMBING, POWER LINES, AND OTHER LINES BEFORE DIGGING.

1. Dig a to the required depth
(Approx. 48"-51" deep). Allow extra depth for gravel.
2. After consulting the local codes, dig a trench to the required depth from the post hole to the power source.
3. Shovel several inches of gravel in the bottom of the hole for drainage Purposes.
4. Insert the underground electrical cable as required from the power source into the inlet hole near the base of the post and continue to feed the cable to the top of the post, allowing sufficient wire leads for splicing purposes.
5. Twist 24" pole (A) with 40" pole(B1) by one pcs of connector (Fig 1)
6. It is recommended that clear silicone sealant be spread evenly on the threads of the bottom pole prior to securing into the coupler.
7. Place the Pole with 48" into the hole at the desired location and stabilize to vertical level position (Fig 2.)
8. Secure another 40" Pole (B2) with B1 by connector (Fig 3.)
9. Put Base (D) from top of Pole (B2), then secure by mounting screws(E) (Fig 4)
10. Let 5" Tube (F) from top of Pole (B2) to Base(D), secure mounting screws(G) by wrench (H) (Fig 5)
11. Twist 40" Pole (C) with B2 by connector (Fig 6)
12. Making sure that the bottom of the pole is imbedded in the gravel, pour concrete to just below the wire access hole.

Fig.1

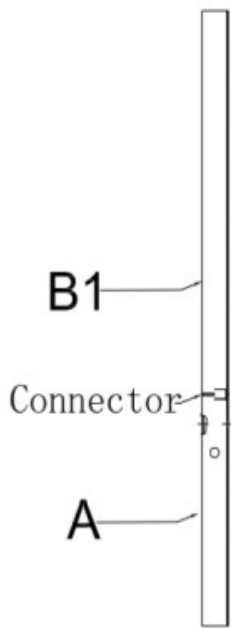


Fig.2

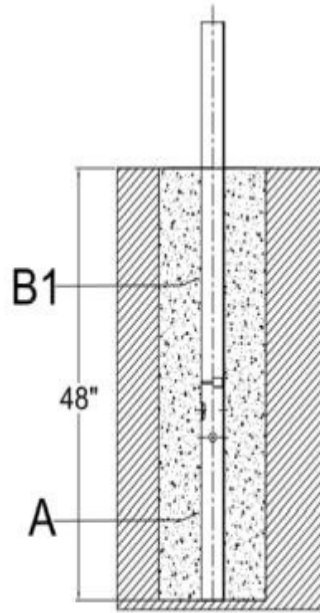


Fig.3

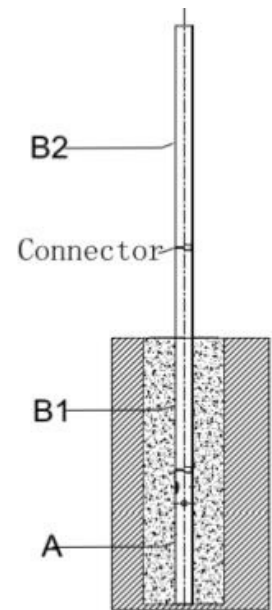


Fig.4

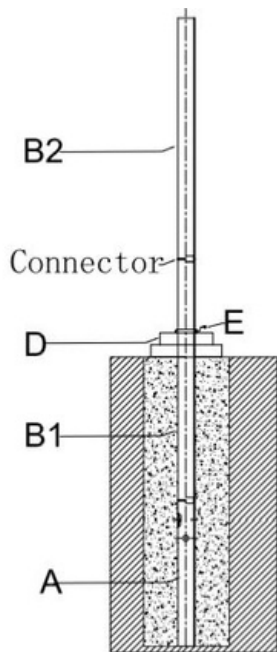


Fig.5

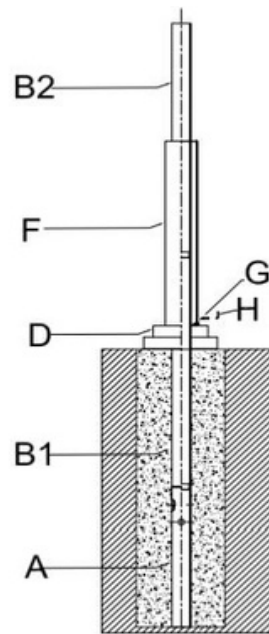


Fig.6

