


Installation Instructions for 4 x 4

IMPORTANT SAFETY INSTRUCTIONS

To reduce the risk of fire, electrical shock, exposure to excessive UV radiation, or injury to persons:

- Do not look directly at the lamp while the fixture is on.
- **RISK OF FIRE:** Use only the type of lamp and maximum wattage indicated in this instruction manual.
- Never cover the halogen lamp with anything other than a lamp shield provided by Edge Lighting and never place flammable material close to the fixture.
- Never turn the fixture on and off by connecting and disconnecting the halogen lamp.
- Do not touch the fixture head, shade or lamp shield while the fixture is on. These surfaces may be **VERY HOT**.
- Do not touch lamp at anytime. Use a soft cloth instead as oil from skin may damage lamp.
- It is normal for a new halogen lamp to produce minor smoke when first turned on.
- Do not operate the luminaire with a missing or damaged shield.
- Turn power off and allow to cool before replacing lamp.




IMPORTANT INFORMATION

- This product is ETL listed for indoor and outdoor locations.
- **RISK OF FIRE:** This product must be installed 4 ft above the ground for wet locations.
- This product can be wall or ceiling mounted.
- This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.
- This product can be dimmed with a low voltage electronic dimmer.


SAVE THESE INSTRUCTIONS!


Install the Fixture

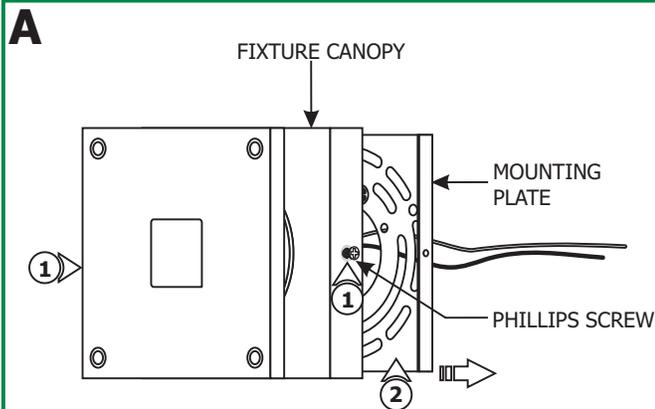

- 1:** Remove the two Phillips screws on the sides of the fixture canopy.
- 2:** Pull the mounting plate off of the fixture canopy.



- 3:** Connect the white transformer wire to the neutral power wire with a wire nut.
- 4:** Connect the black transformer wire to the hot power wire with a wire nut.
- 5:** Place the transformer and transformer wires inside the electrical box.

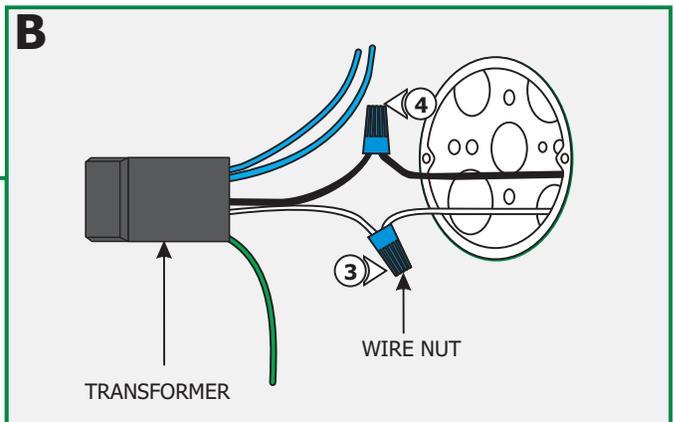

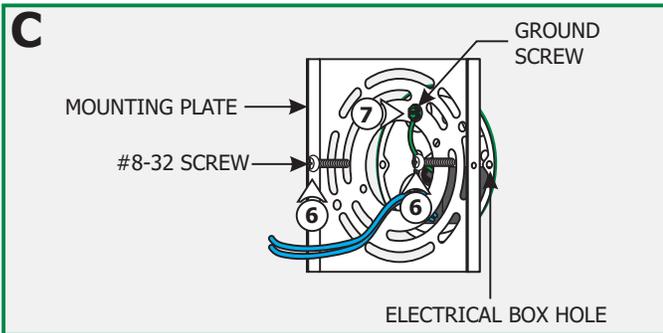

- 6:** Line up the mounting plate with the electrical box holes, and secure it in place by tightening the two #8-32 screws provided.
- 7:** Connect the transformer green wire to the mounting plate ground screw. Make sure that the mounting plate is grounded in accordance with local electrical codes.



- 8:** Connect each transformer low voltage (blue wire) to one fixture wire with a wire nut
- 9:** Place all wires and wire connections inside the electrical box.

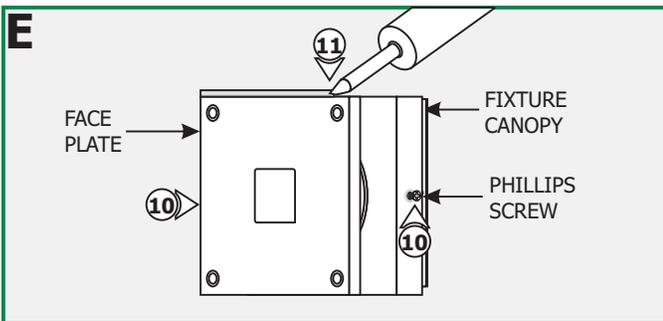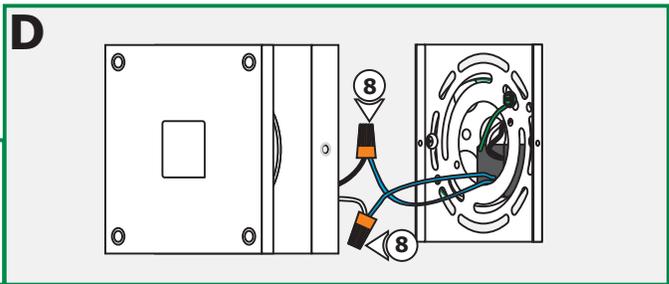

- 10:** Place the fixture canopy onto the mounting plate, make sure the gasket is in place and secure it by tightening the two Phillips screws.
- 11:** For installation in **wet location**, caulk around the fixture fixture canopy with waterproof construction sealant.

Install the Lamp

- 1:** While holding the fixture face plate, loosen the two M3 set screws on the support posts (**Do Not Remove**) with the provided 1.5mm Allen wrench.
- 2:** While holding the glass ring in place, carefully remove the face plate.

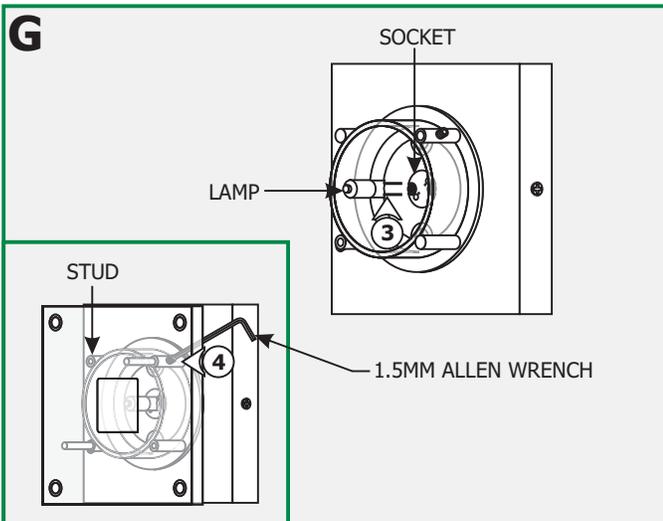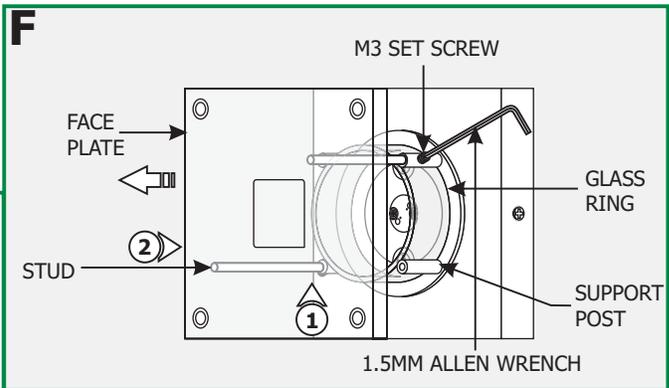

CAUTION: To reduce risk of a burn or electrical shock during lamping, disconnect the power to the fixture.

NOTE: Use only fingers and a soft cloth to install the lamp.

Use **MAX 20** Watt Bi-Pin Halogen Lamp. 

- 3:** Remove the old lamp.
- 4:** Push the new lamp pins completely into the socket holes.
- 5:** Align the face plate studs with the support posts. Push the face plate studs completely into the support posts and tighten the two M3 set screws with the 1.5mm Allen wrench.