



1718 W. Fullerton Chicago, IL 60614
 Ph: 773.770.1195 • Fax: 773.935.5613
 www.PureEdgeLighting.com • info@PureEdgeLighting.com
 © 2016 PureEdge Lighting. All Rights Reserved.


Installation Instructions for Flex Neon LRF5 24VDC Outdoor Wet Location, TruColor™ RGBTW

FN-LRF5-__


IMPORTANT INFORMATION

- This instruction shows a typical installation.
- The Outdoor Flex Neon is an IP67 rated wet location fixture featuring water tight barrel connections.
- This product bends right to left or left to right.
- This product must be installed by a qualified electrician and in accordance with local electrical codes.

SAVE THESE INSTRUCTIONS!

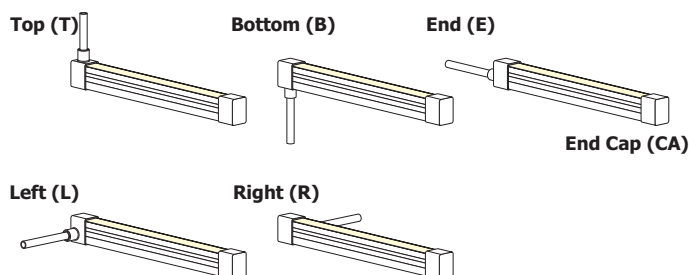



Section One: Install the Flex Neon

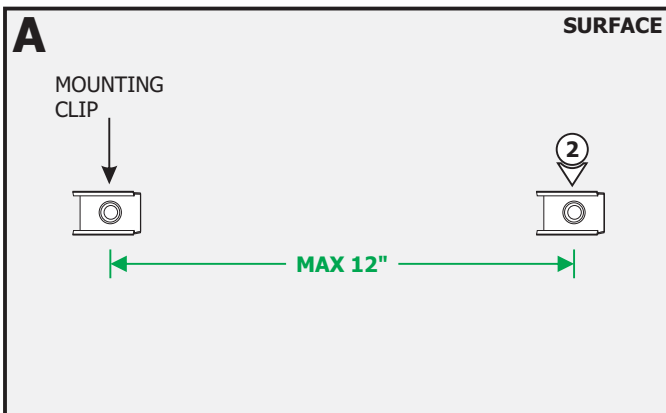


NOTE: Omit this Section if using the Flexible Aluminum Channel. Refer to Section Three.

- 1: Determine the location for the Flex Neon.
- 2: Mark the location of the mounting clips. Mounting clips must be maximum 12" apart from each other (measure from the center of the mounting clip).

- 3: Secure the mounting clips to a wood surface by tightening the screws to each clip.

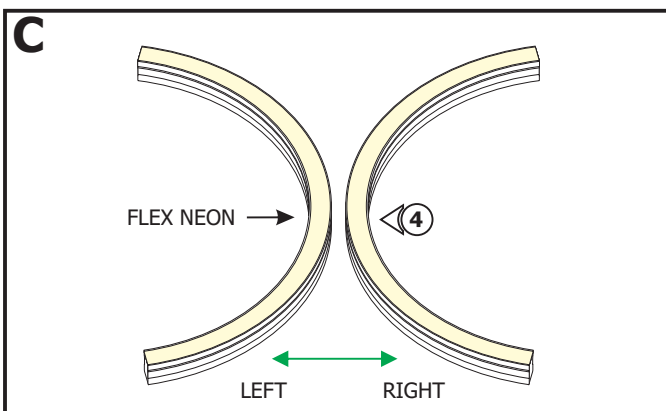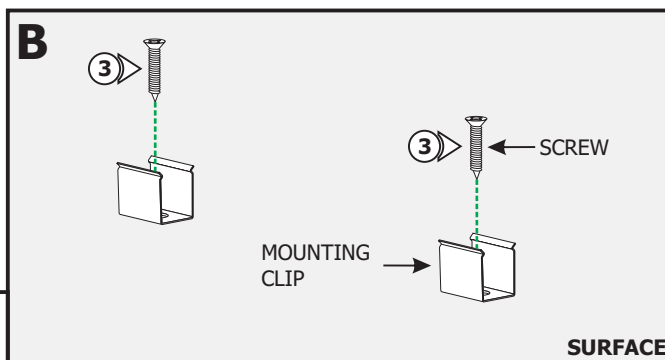


- 4: If necessary, bend the Flex Neon **ONLY** right to left or left to right.

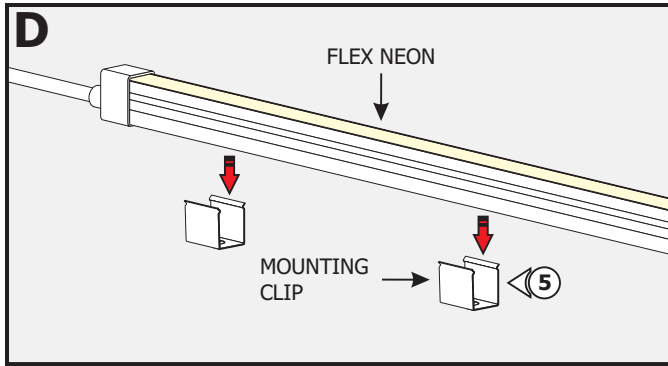

5: Insert the Flex Neon into each mounting clip.

Section Two: Connect to Power

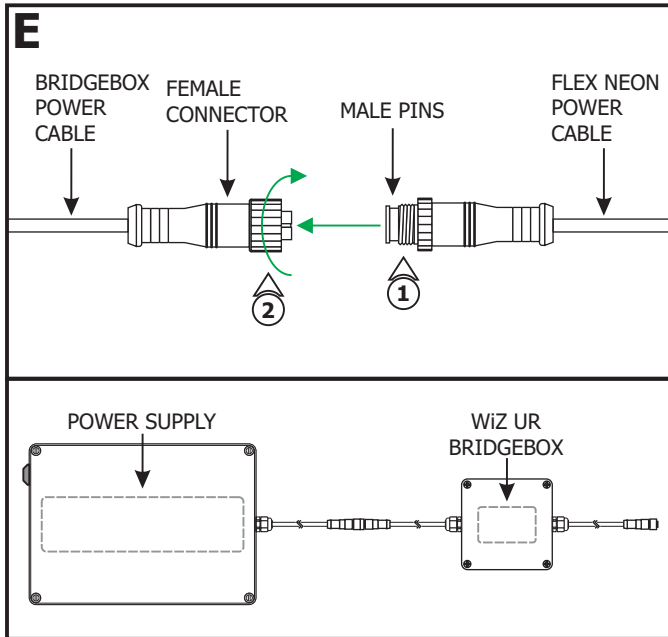

1: Align the power cables from the Bridgebox and the Flex Neon and push into place, ensuring that the female connector and male pins mate properly.


2: Twist the connector nut to lock in place.

NOTE: Refer to the instructions provided with the power supply to complete the installation.

3: To connect additional Flex Neon, align and push the female barrel connector of one Flex Neon into the male barrel connector of the next one.


4: Twist the connector nut to lock in place. Repeat for any additional sections.

NOTE: Ensure that additional Flex Neon are properly supported and powered.

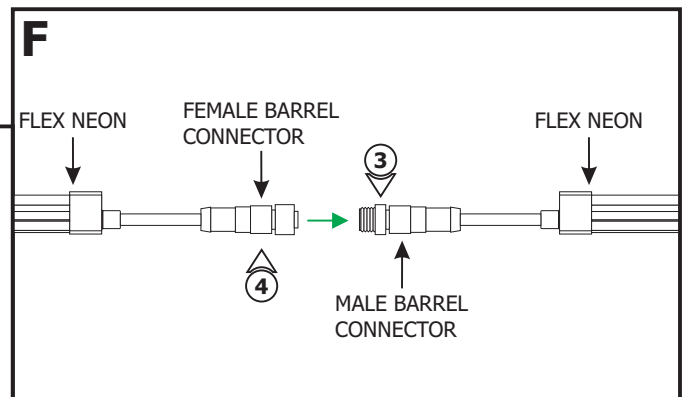

Section Three: Install the Flex Neon with Flexible Aluminum Channel

G

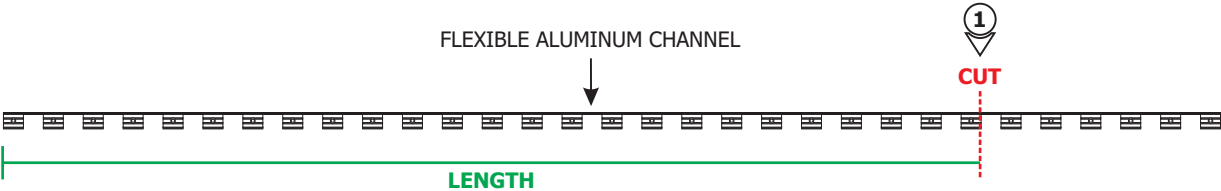


FLEXIBLE ALUMINUM CHANNEL

CUT

LENGTH

1: If necessary measure and cut **ONLY** the Flexible Aluminum Channel to length.

H

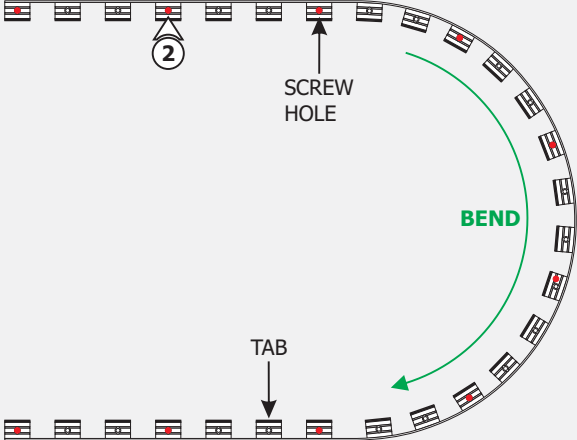

SCREW HOLE

BEND

TAB

2: Determine the location of the Flexible Aluminum Channel and mark every fourth tab screw holes.


NOTE: The Flexible Aluminum channel bends in both directions. For simple curves or circles, it is recommended to bend the channel toward the tabs.

NOTE: Step 3 and 4 are for drywall mounting. Omit these steps if mounting to a wood surface directly.

3: Anchors are not provided. Tap the anchors onto the marked points up to the threaded portion with a hammer.

4: Screw in the threaded portion of the anchors with a Phillips screwdriver.

I

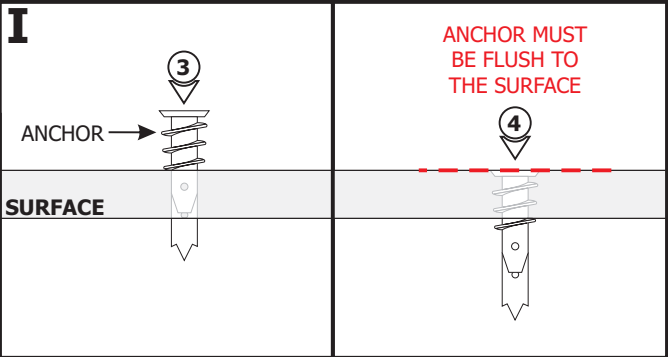


ANCHOR

ANCHOR MUST BE FLUSH TO THE SURFACE

SURFACE

J

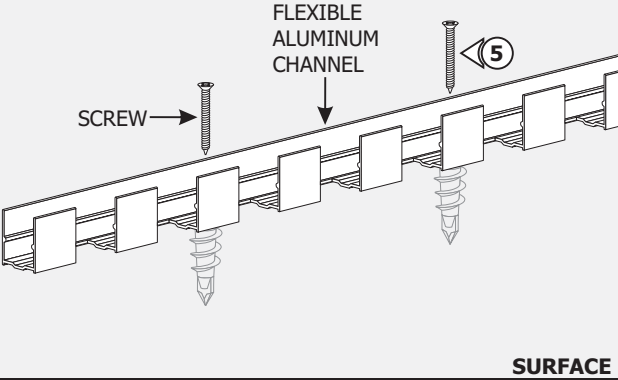


SCREW

FLEXIBLE ALUMINUM CHANNEL

SURFACE


5: Secure the Flexible Aluminum Channel to the anchors using screws.

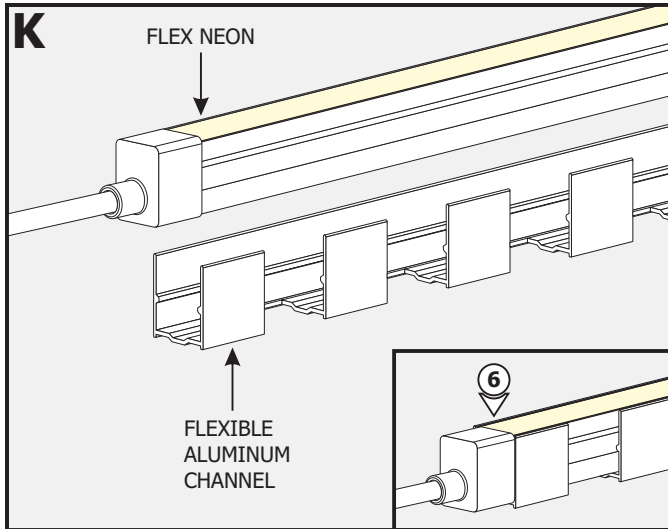

6: Carefully push the Flex Neon completely inside the Flexible Aluminum Channel, leaving the end cap outside of the channel.

7: Remove the backing from the channel cover. Firmly press down on the Flexible Aluminum Channel tabs while removing the rest of the backing.

8: Refer to Section Two to connect to power.

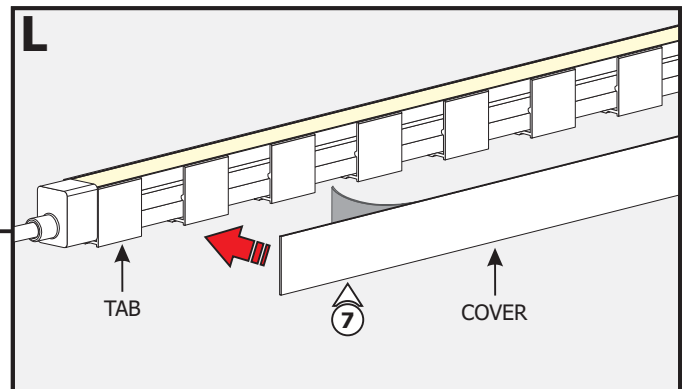


Section Five: Pure Smart Room Controller and WiZ Connected App

M



PURE SMART
ROOM CONTROLLER
CWW-TW-SCENE-WH




PURE SMART
REMOTE ROOM CONTROLLER
CWR-TW-SCENE-WH

NOTE: Before beginning, download the "WiZ Connected" app from either Google Play or the Apple App Store.



1: Refer to the instructions provided with the optional controller and the WiZ App for complete set up.

General Wiring Diagram

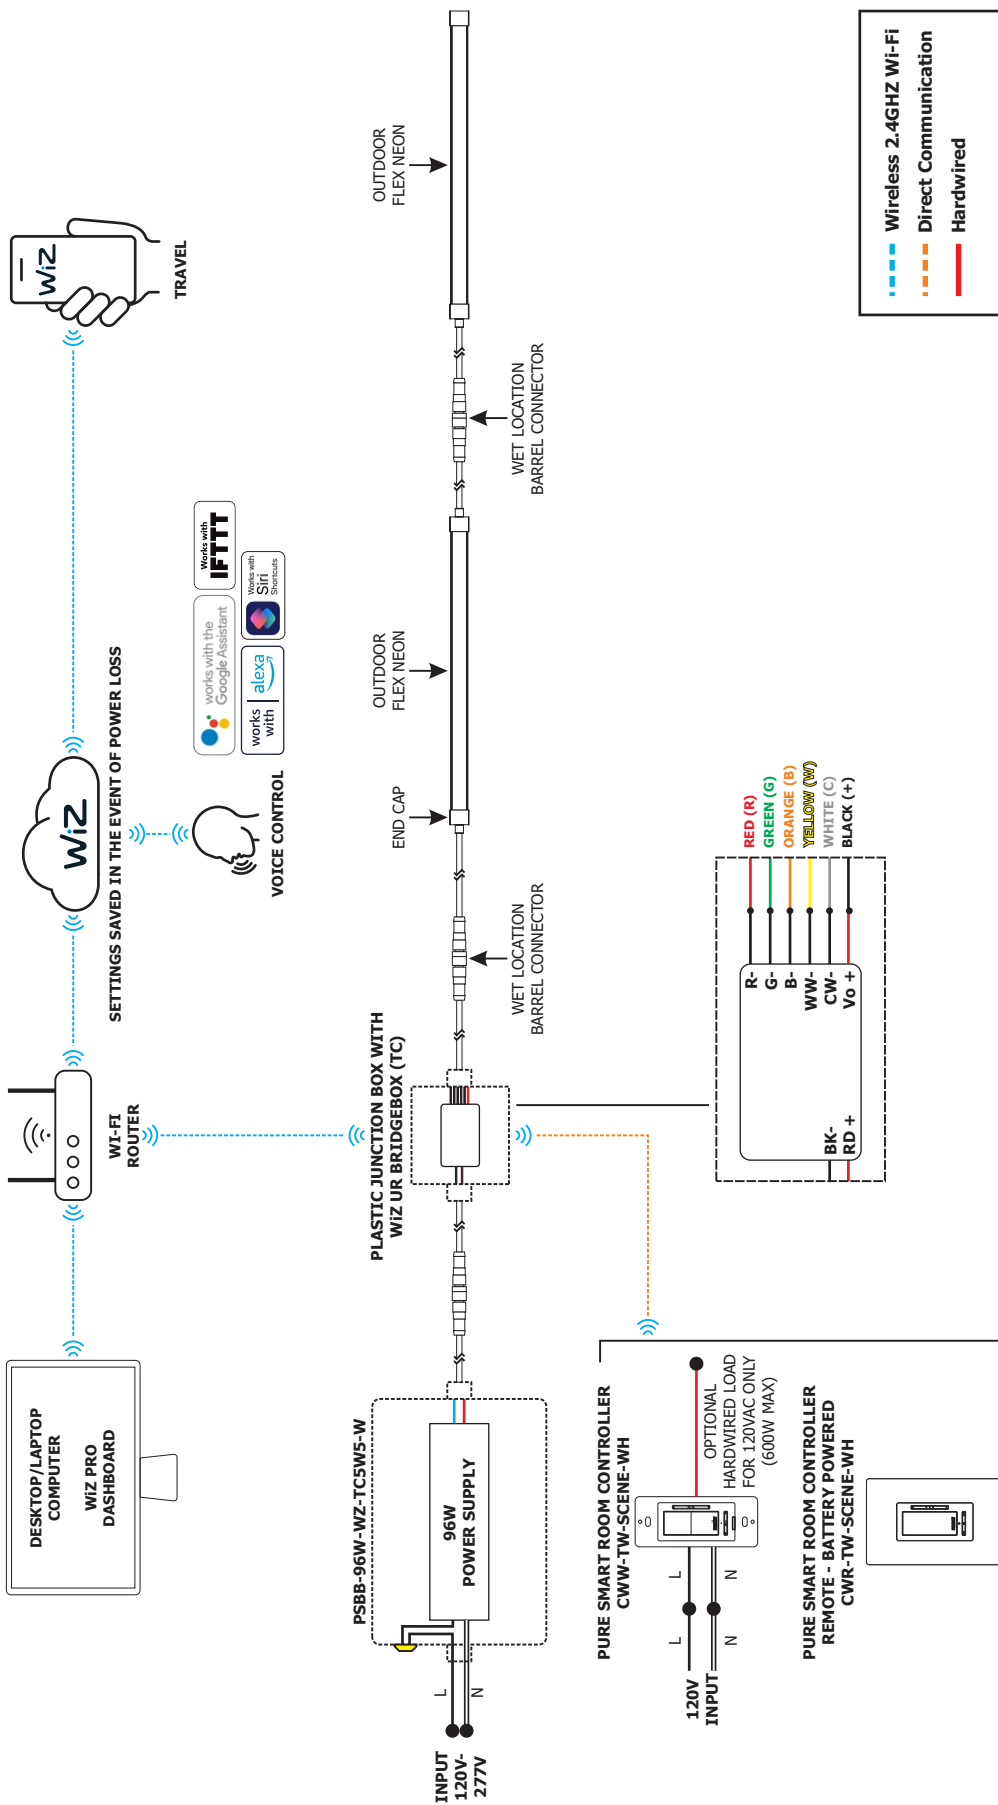

<https://faq.wizconnected.com/en/en/7-wiz-v2/faq/527-adding-wiz-lights-in-your-home/>



1. Download the Free App
Search "WIZ Connected" in the App Store.



2. Install the Flex Neon
Install the Flex Neon LRF5.



3. Pair the Flex Neon with App
Follow the pairing directions in the app to complete the setup.



4. Enjoy the Possibilities
Endless color combinations with Red, Green, Blue, and Tunable White are now ready for all moods and occasions.